

QSC
work from home
webinar series



Zoom's Room Controls

This Webinar Is Not About The Plugin

(but the plugin is pretty cool)



NOTES

Design File version 2.1
corresponds to Plugin version
2.0

**Make sure to rename your Core
and peripherals!**

BETA_Zoom Room
v2.0
ZoomRoom

BETA_Zoom Room v2.0 ZoomRoom

Connection Setup | In Call | Camera Control | Phonebook | Bookings | Co

zoomrooms

Zoom Room Version: Plugin Version: 2.0

Setup

IP Address	Username	Password
192.168.X.XX	zoom	XxXxX


Connect

Status


Connection

This Webinar Is Not About The Plugin

(but the plugin is pretty cool)

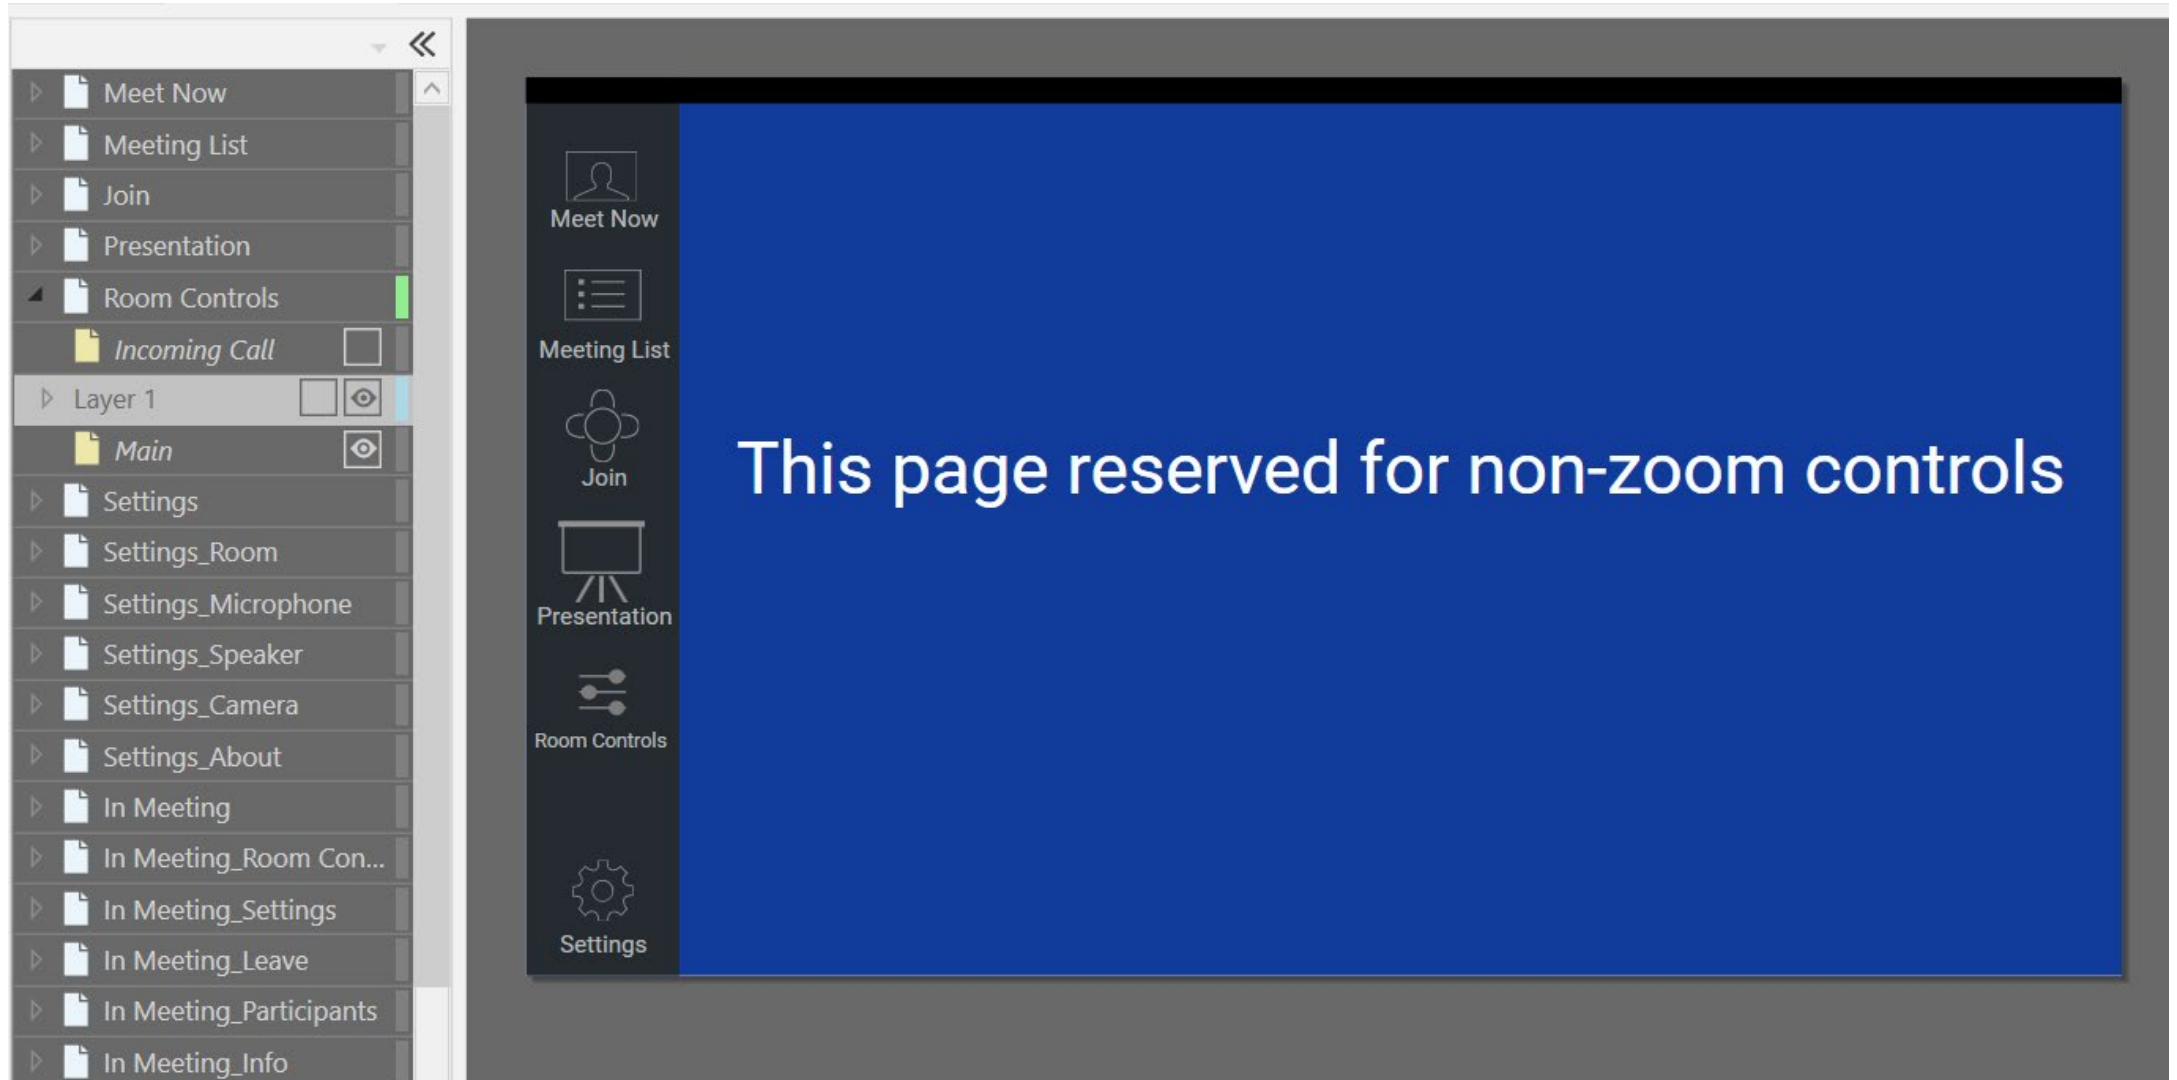

Enabled in the Zoom Admin Portal

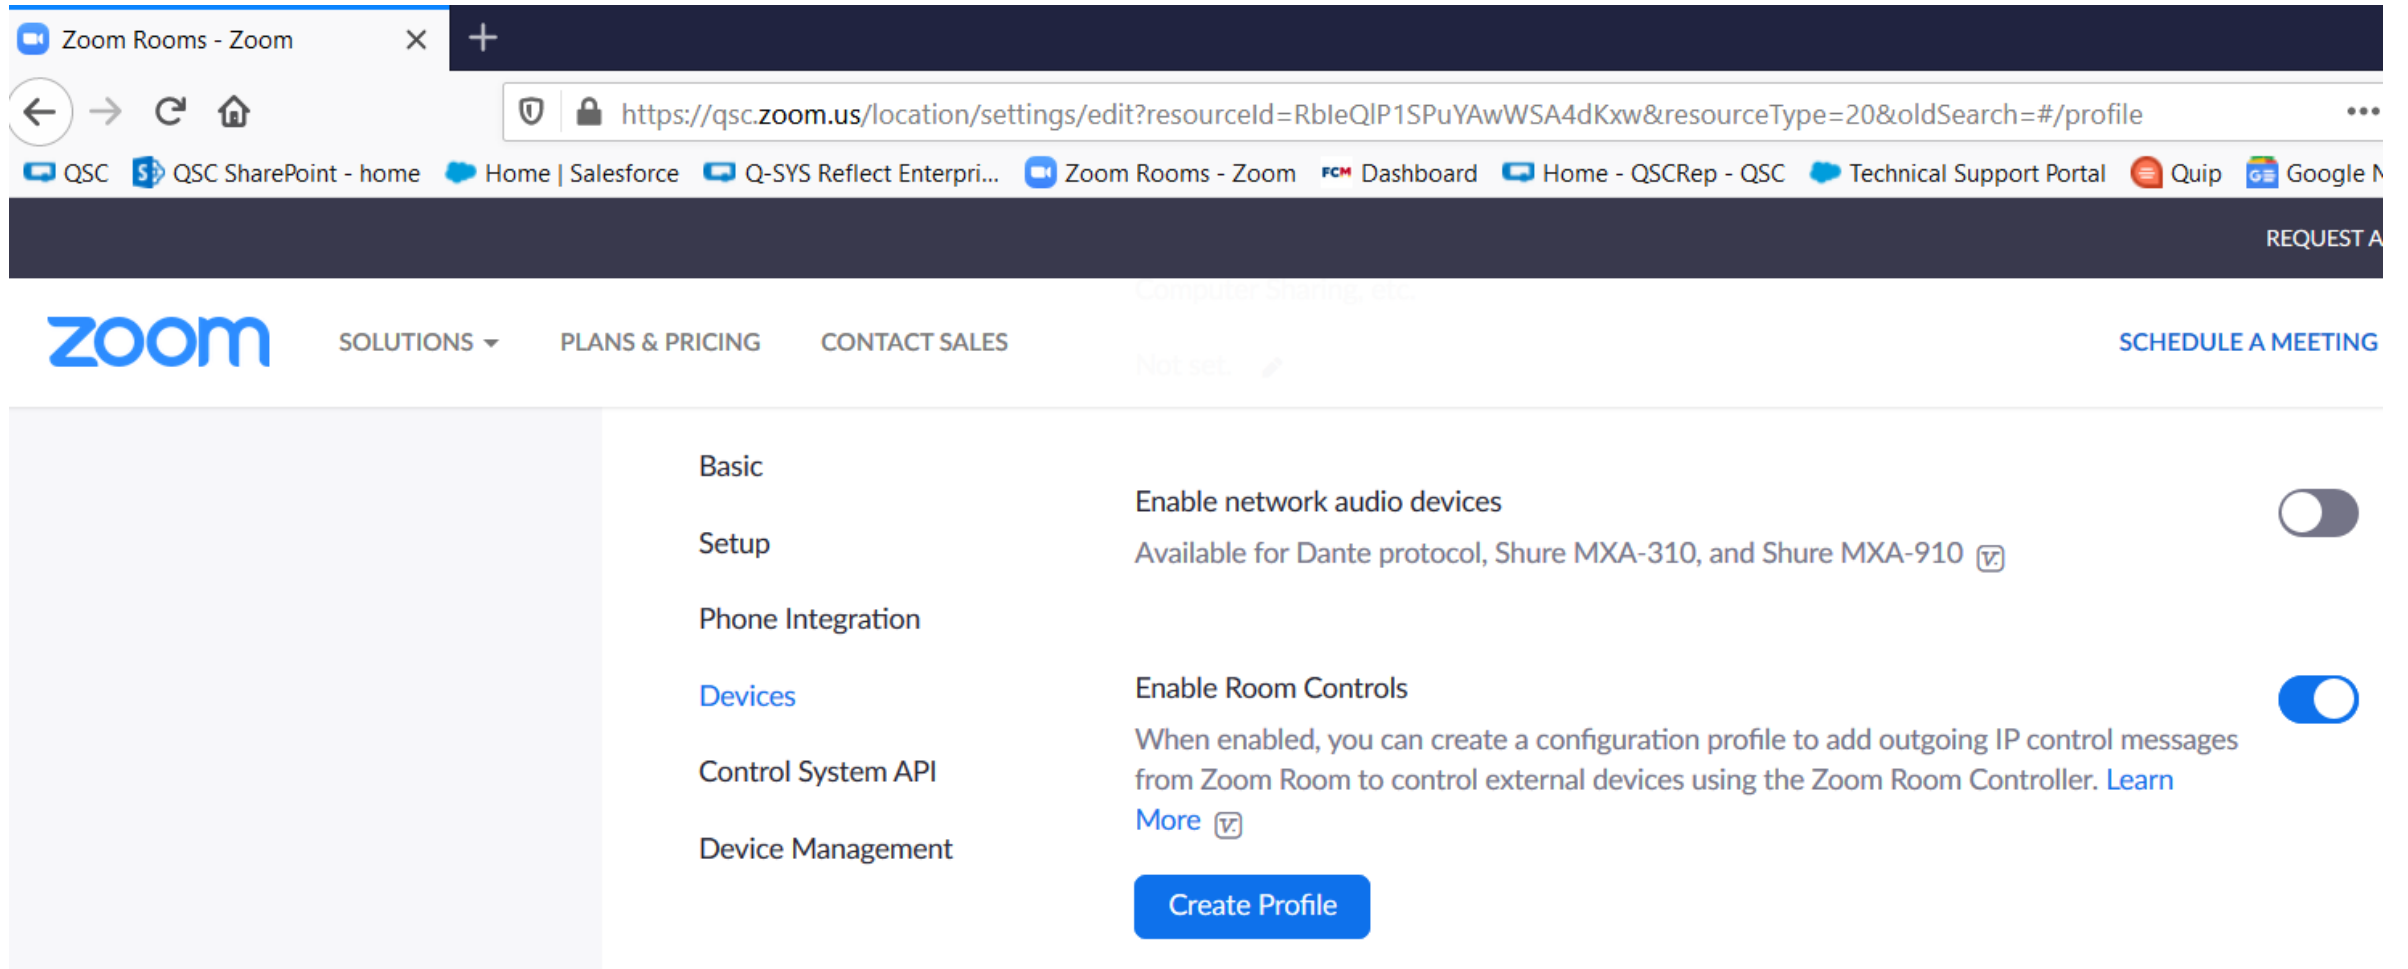

The screenshot shows a web browser window with the address bar displaying `https://qsc.zoom.us/location/settings/edit?resourceId=RbleQIP1SPuYAwWSA4dKxw&resourceType=20&oldSearch=#/profile`. The browser's tab bar shows several open tabs, including "Zoom Rooms - Zoom". The page header features the Zoom logo and navigation links: "SOLUTIONS", "PLANS & PRICING", and "CONTACT SALES". A "SCHEDULE A MEETING" button is located in the top right corner. The main content area is divided into a left sidebar and a right settings panel. The sidebar lists categories: "Basic", "Setup", "Phone Integration", "Devices" (highlighted in blue), "Control System API", and "Device Management". The "Devices" category is expanded, showing the "Enable Room Controls" toggle, which is currently turned on. Below this toggle, there is a description: "When enabled, you can create a configuration profile to add outgoing IP control messages from Zoom Room to control external devices using the Zoom Room Controller. [Learn More](#)". A blue "Create Profile" button is positioned at the bottom of the settings panel.

Zoom Rooms - Zoom

← → ↺ 🏠

🔒 `https://qsc.zoom.us/location/settings/edit?resourceId=RbleQIP1SPuYAwWSA4dKxw&resourceType=20&oldSearch=#/profile`

QSC QSC SharePoint - home Home | Salesforce Q-SYS Reflect Enterpri... Zoom Rooms - Zoom FCM Dashboard Home - QSCRep - QSC Technical Support Portal Quip Google N

REQUEST A

zoom SOLUTIONS ▾ PLANS & PRICING CONTACT SALES

SCHEDULE A MEETING

Basic

Setup

Phone Integration

Devices

Control System API

Device Management

Enable network audio devices

Available for Dante protocol, Shure MXA-310, and Shure MXA-910 [V](#)


Enable Room Controls

When enabled, you can create a configuration profile to add outgoing IP control messages from Zoom Room to control external devices using the Zoom Room Controller. [Learn More](#) [V](#)

Create Profile


<https://support.zoom.us>

When not in a meeting, the Room Controls icon is on the left.

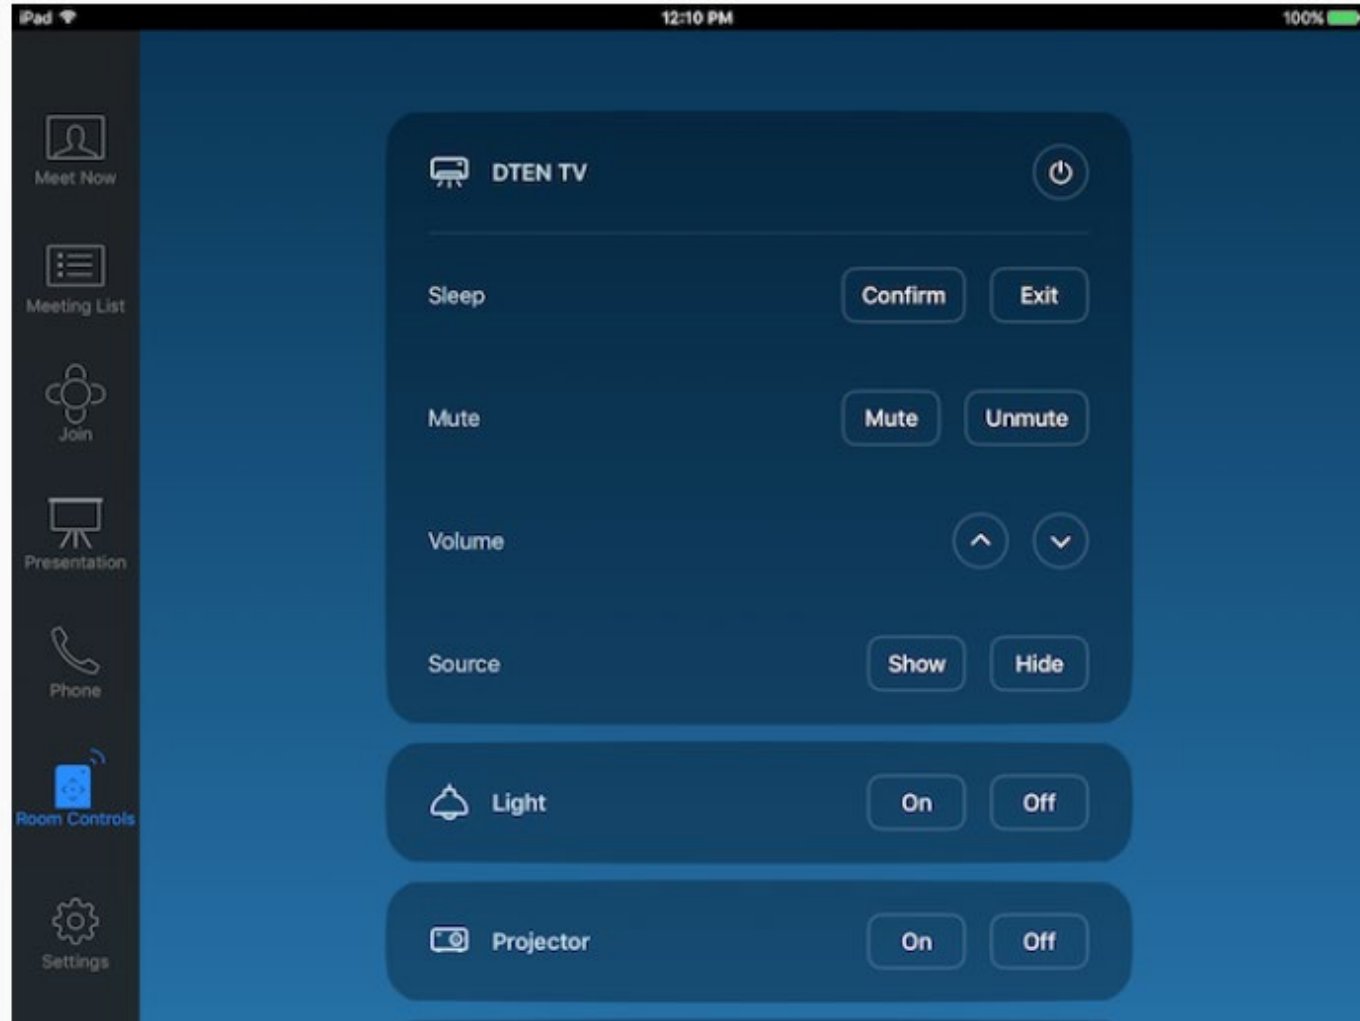


<https://support.zoom.us>

1. During a meeting, tap the icon at the top right.

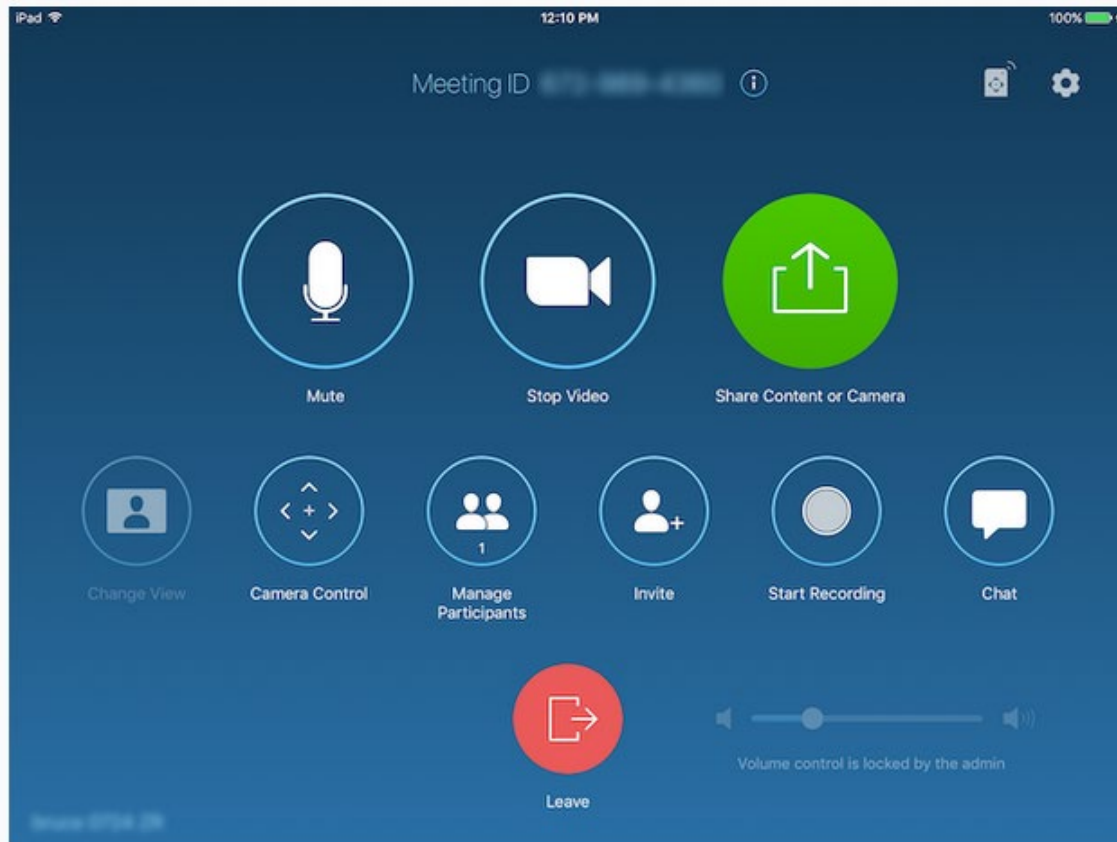

2. The Room Controls will now display.

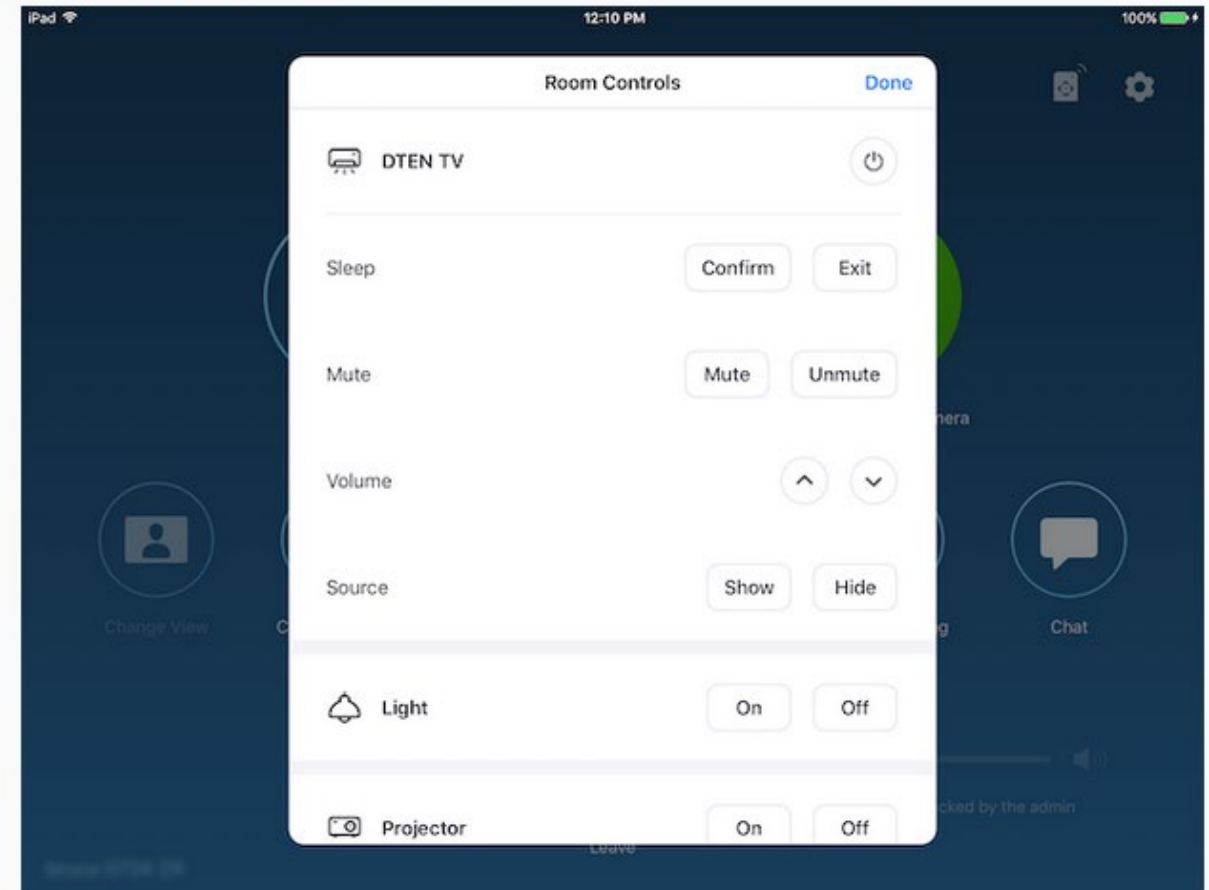


Let Q-SYS help keep it simple. (and not turn into this...)



```
{ "adapters": [ { "model": "GenericNetworkAdapter", "ip": "tcp://10.0.167.14:1702", "ports": [ { "id": "qsys_core", "name": "Q-SYS Core", "methods": [ { "id": "DisplayPower", "name": "Display Power", "command": "csv DisplayPower %r\n", "params": [ { "id": "on", "name": "On", "value": "1" }, { "id": "off", "name": "Off", "value": "0" } ], "type": "actions" }, { "id": "source", "name": "Video Source", "command": "csv Output1 %r\n", "params": [ { "id": "source1", "name": "Zoom Room", "value": "4" }, { "id": "source2", "name": "Laptop", "value": "7" }, { "id": "source3", "name": "Apple TV", "value": "8" }, { "id": "source4", "name": "Media Player", "value": "9" } ], "type": "actions" }, { "id": "RoomLayout", "name": "Room Layout", "command": "ssl RoomLayout %r 0\n", "params": [ { "id": "classroom", "name": "Classroom", "value": "1" }, { "id": "tables", "name": "Board Room", "value": "2" } ], "type": "actions" }, { "id": "MicMute", "name": "Microphone Mute", "command": "csv MicMute %r\n", "params": [ { "id": "on", "name": "On", "value": "1" }, { "id": "off", "name": "Off", "value": "0" } ], "type": "actions" }, { "id": "InCall", "name": "In Call", "command": "csv InCall %r\n", "params": [ { "id": "on", "name": "On", "value": "1" }, { "id": "off", "name": "Off", "value": "0" } ], "type": "actions" }, { "id": "VideoStart", "name": "VideoStart", "command": "csv VideoStart %r\n", "params": [ { "id": "on", "name": "On", "value": "1" }, { "id": "off", "name": "Off", "value": "0" } ], "type": "actions" } ] ] }, { "model": "GenericNetworkAdapter", "ip": "tcp://10.0.167.15:2202", "ports": [ { "id": "ceilingmicrophone", "name": "Ceiling Microphone", "methods": [ { "id": "MuteLED", "name": "MuteLED", "command": "csv MuteLED %r\n", "params": [ { "id": "on", "name": "On", "value": "1" }, { "id": "off", "name": "Off", "value": "0" } ], "type": "actions" } ] } ], { "model": "GenericNetworkAdapter", "ip": "tcp://10.0.167.16:23", "ports": [ { "id": "ProjectionScreen", "name": "Screen", "methods": [ { "id": "screen", "name": "screen", "command": "\x01\x02\x03\x%\r\n", "params": [ { "id": "up", "name": "up", "value": "01" }, { "id": "down", "name": "down", "value": "00" } ], "type": "actions" } ] }, { "model": "GenericNetworkAdapter", "ip": "tcp://10.0.167.15:2202", "ports": [ { "id": "display1", "name": "display1", "methods": [ { "id": "power", "name": "power", "command": "POWR%\r\n", "params": [ { "id": "on", "name": "On", "value": "1" }, { "id": "off", "name": "Off", "value": "0" } ], "type": "actions" } ] } ], { "model": "GenericNetworkAdapter", "ip": "tcp://10.0.167.15:2202", "ports": [ { "id": "display2", "name": "display2", "methods": [ { "id": "power", "name": "power", "command": "POWR%\r\n", "params": [ { "id": "on", "name": "On", "value": "1" }, { "id": "off", "name": "Off", "value": "0" } ], "type": "actions" } ] } ], ], "styles": [ "qsys_core.icon=icon_rack_equipment", "qsys_core.DisplayPower.icon=icon_power", "qsys_core.source.icon=icon_tv", "qsys_core.RoomLayout.icon=icon_air_conditioner", "qsys_core.MicMute.invisible=true", "qsys_core.InCall.invisible=true", "qsys_core.VideoStart.invisible=true" ], "rules": { "meeting_started": [ "qsys_core.InCall.on" "ceilingmicrophone.muteLED.off" "display1.Power.On" "display2.Power.On" "ProjectionScreen.Down" ], "meeting_ended": [ "qsys_core.InCall.off" "ceilingmicrophone.muteLED.on" "display1.Power.Off" "display2.Power.Off" "ProjectionScreen.Up" ], "microphone_muted": [ "qsys_core.MicMute.on" "ceilingmicrophone.muteLED.on" ], "microphone_unmuted": [ "qsys_core.MicMute.off" "ceilingmicrophone.muteLED.off" ], "video_started": [ "qsys_core.VideoStart.on" ], "video_stopped": [ "qsys_core.VideoStart.off" ] }
```

ProAV Training Room/Classroom

<https://support.zoom.us/hc/en-us/articles/360022403651-ProAV-Training-Room-Classroom>

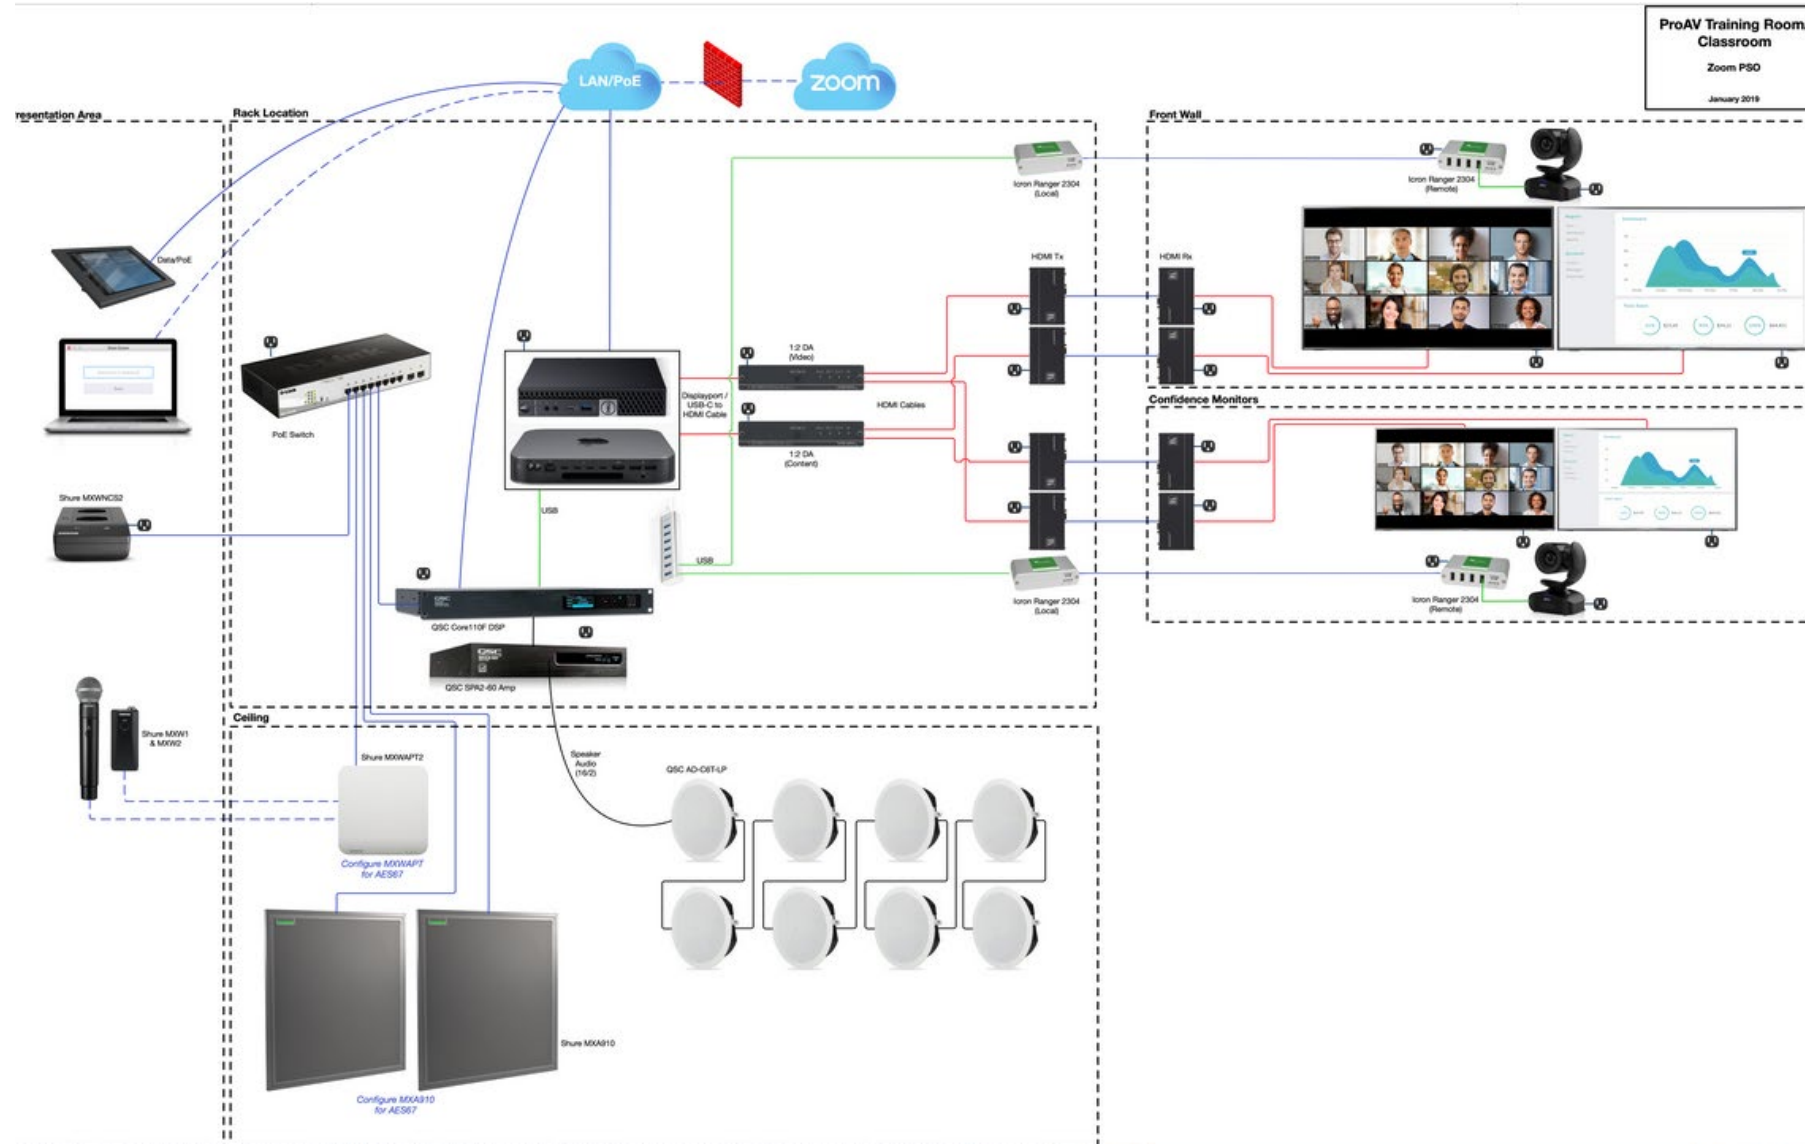

ProAV Training Room/Classroom


<https://support.zoom.us/hc/en-us/articles/360022403651-ProAV-Training-Room-Classroom>





ProAV Divisible Space

<https://support.zoom.us/hc/en-us/articles/360022463651-ProAV-Divisible-Space>

Configuration #1 (Side by Side):

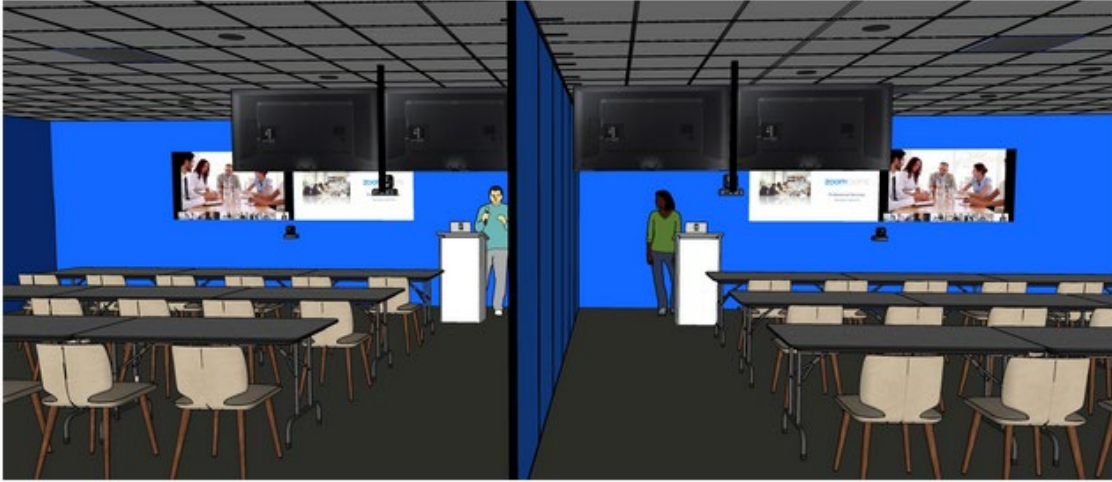

Configuration #2 (Multipurpose):

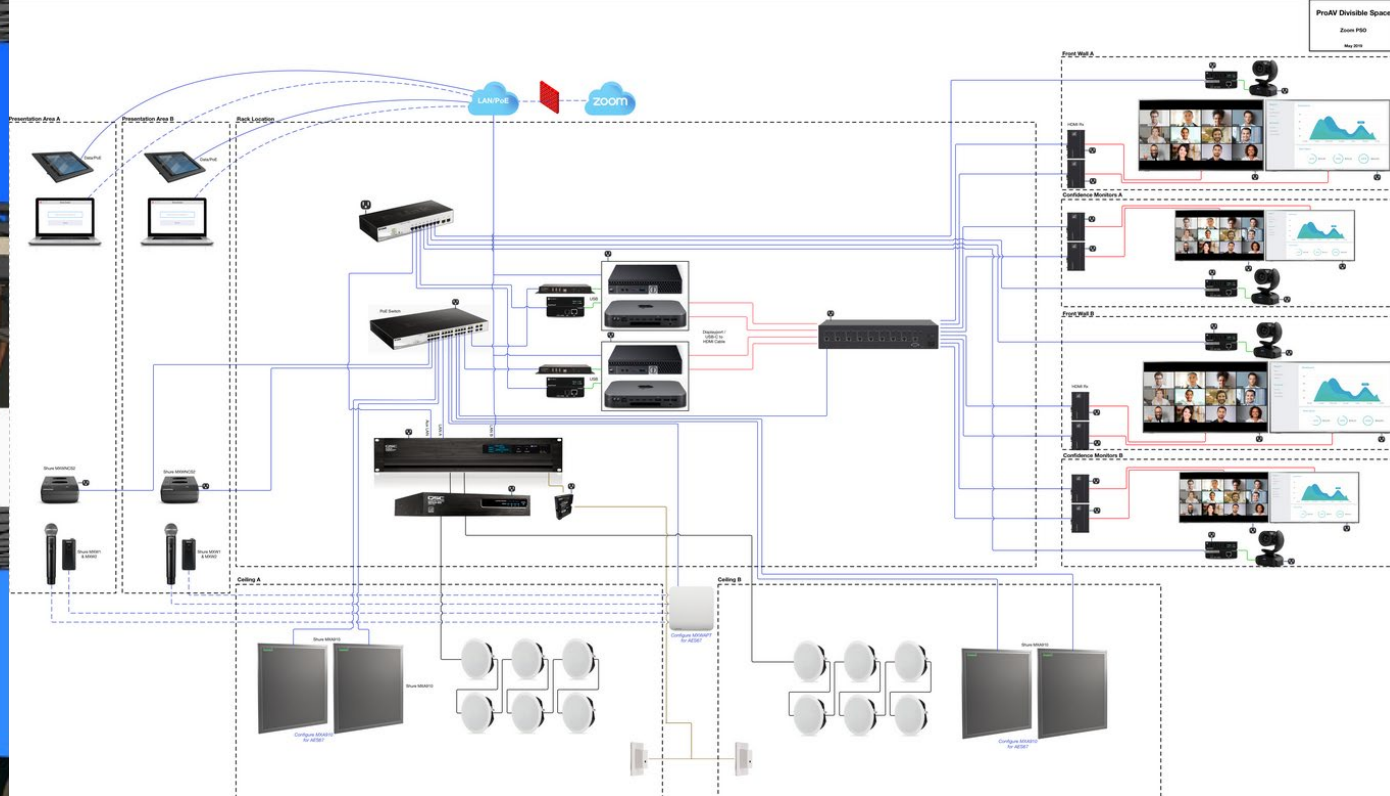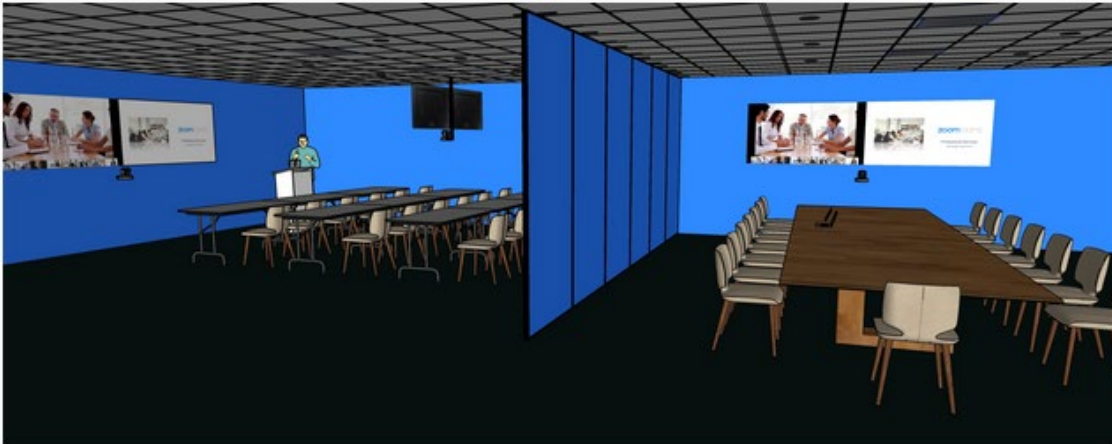

QSC

work from home

webinar series



Instructor: Kevin Rhodus, Kevin.Rhodus@qsc.com

Moderator: Ed Veeseer, Ed.Veeseer@qsc.com

Q&A