

Bright Star 4 in 1 RGBW LED Flood Light - 24VDC


SKU: WW-LG-RGBW-F1XL

ECOCITY
LED LIGHTING SOLUTIONS

1092 Greg Street
Sparks, NV 89431
ECOLOCITYLED.COM
775-636-6060



SPECIFICATIONS

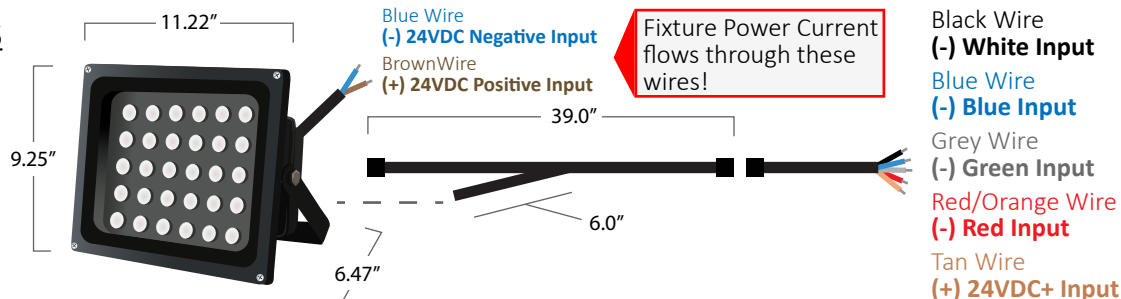

Product SKU : WW-LG-RGBW-F1XL
LED Type: Epistar RGB 4in1
LED Quantity : 30 x 8Watt LEDs
Input Power : 24VDC Constant Voltage
Watts : 240W
Operating Temp : -35° ~ 131°F
Operating Lifetime: 50,000 Hours
Beam Angle : 60°
Rating : IP65
Warranty Period : 1 Year

Input Power: 24VDC Constant Voltage

Power supply equation

$$X * 240.0 = Y$$

X = amount of LED fixtures

Y = minimum transformer wattage

PRECAUTIONS



WARNING - This product should be installed, cut and connected only by a qualified professional.



NEVER cut, connect, or join wires while product is connected to a live power source.



24VDC Use 24VDC Input Only!



Unlimited fixtures can be daisy chained but each fixture requires external 24VDC power input.

*see installation guide



DO NOT use AC Input!



DO NOT operate in any environments over 131°F.



This product is not designed to be submersed or installed in areas with standing water.



BE CERTAIN your 24VDC source, RGBW controller and wire gauge is suffice for power load.

1092 Greg Street
Sparks, NV 89431, USA

ECOCITY
LED LIGHTING SOLUTIONS

ECOLOCITYLED.COM
775-636-6060

Bright Star 4 in 1 RGBW LED Flood Light - 24VDC

SKU: WW-LG-RGBW-F1XL

INSTALLATION

REQUIRED SUPPLIES



Wrench and mounting supplies



24VDC RGBW Controller or 4CH DMX Driver




24VDC Power Supply


OPTIONAL SUPPLIES



80' RGBW Flood Light Jumper Wire




Outdoor Wire and Wire Strippers




Wire Nuts or Connectors

1.) Mount Fixture




Mount your RGBW Fixture to a secure surface. If possible mount the fixture where it can be slightly guarded from UV and outdoor elements.

2.) Connect Controller




Always be certain power is disabled before connecting! Connect the 5 pair wires from the fixture to your RGBW controller, then the 2 pair wires from power supply to DC input.

3.) Connect Transformer



WARNING – This step should be done by a qualified professional. Always disable AC power before connecting! Use wire nuts or connectors to secure your AC input to your 24V transformer.

4.) Turn on Power to Test



Once the light has been wired and mounted you can now turn on power to your 24VDC source. Repeat these steps and use parallel connections for multiple fixtures.


5.) Adjust Light Position




Once the light has been wired, mounted and tested you can now adjust the angle of the fixture for ideal light output. Tighten bolts on each side to secure.

CONNECTION EXAMPLES: 240 Watts per fixture

✗ If Connected This Way Power is Drawn Through RGBW Controller! (Max Controller Load for Serial Connection)

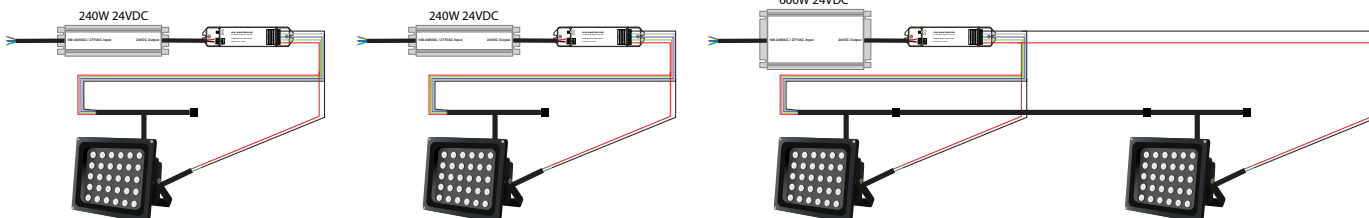

✓ If Connected This Way Power is Drawn Through 24VDC Power Supply (Unlimited Fixtures from 1 Controller)

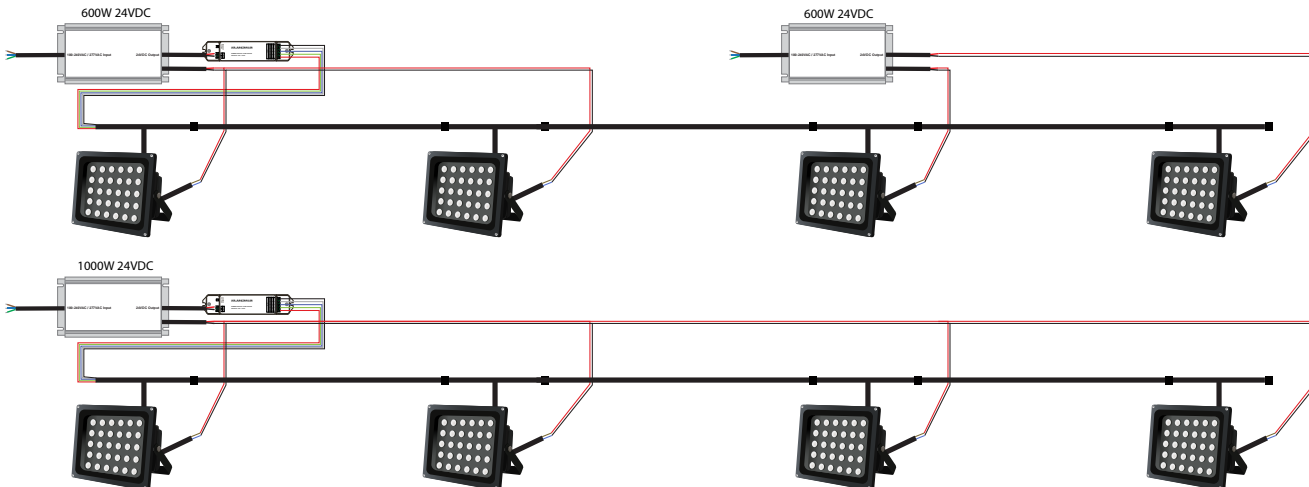

Bright Star 4 in 1 RGBW LED Flood Light - 24VDC

SKU: WW-LG-RGBW-F1XL

RGBW Fixture Accessories



24VDC Power Supplies



RGBW LED Controllers



Wire Connectors



DC Connection Wire

HELPFUL LINKS:

24VDC Power Supplies - https://www.ecolocityled.com/category/led_power_supplies_24v

RGBW LED Controllers - <https://www.ecolocityled.com/category/4ch-led-controls>

RGBW Connection Wire - <https://www.ecolocityled.com/product/5-wire-dc-connect>

Wire Connectors - https://www.ecolocityled.com/category/wire_connectors

DMX Lighting Controls - https://www.ecolocityled.com/category/dmx_lighting_control