

## ST5-Si-NE

DC Advanced Microstep Drive w/ Si Programming & Encoder Input



### Product Features

- Programmable microstepping drive with advanced current control
- 100 lines of icon-based program capability
- Si Programmer™ is heralded for its programming ease
- Animation mode displays operation in real time, great for debugging
- Wide current range 0.1 to 5.0 A/phase (peak of sine) with idle current reduction
- Advanced anti-resonance algorithm
- Torque ripple smoothing
- Microstepping and Microstep Emulation
- 8 digital inputs, 4 digital outputs, optically isolated
- Encoder feedback connector for Stall Prevention & Stall Detection
- RS-232 cable and mating connectors included

## Description

The ST5-Si-NE stepper drive is a DC-powered microstepping drive for controlling two-phase, bipolar step motors. It offers advanced current control and a sophisticated 3rd generation anti-resonance algorithm that electronically dampens motor and system resonances to improve motor smoothness and usable torque over a wide speed range. The drive also employs electronic torque ripple smoothing and microstep emulation to greatly reduce motor noise and vibration. The drive must be powered from 24-48 VDC and can output up to 5.0 A/phase (peak-of-sine) to the step motor. Over-voltage, over-temperature and over-current protection features prevent damage while running in adverse conditions. The drive is complemented by a specifically matched set of NEMA 11 through NEMA 23 frame stepper motors (see Related and Recommended products below).

The ST5-Si-NE can operate in all of the same control modes as the Q models, plus it has the ability to run a stand-alone Si program stored in non-volatile memory. Si programs are created using the [Si Programmer™](#) software, which provides unparalleled simplicity in indexer-drive programming via Applied Motion's unique and powerful icon-based programming environment. Preconfigured motor setup files included with *Si Programmer™* make it easy to set up the drive for optimum results.

For connecting to external devices such as control signals, incremental encoders, limit switches, proximity or photoelectric sensors, PLC I/O, lamps, and other devices, the drive comes with 8 digital inputs and 4 digital outputs. Adjustable digital filters are present on the digital inputs for enhanced reliability in noisy environments. *Note: 2 single-ended analog inputs, which can be wired together as 1 differential analog input, are also available, but not in Si program mode.*

The drive comes with an RS-232 port for configuration and programming.

The ST5-Si-NE comes with an encoder feedback connector for applications that demand a higher level of position control than ordinary open-loop step motor systems can provide. Use our double-shaft step motors with incremental encoders and activate either Stall Detection or Stall Prevention in the drive. Stall Detection notifies the system as soon as the required torque is too great for the motor, which results in a loss of synchronization between the rotor and stator, also known as stalling. Stall Prevention automatically adjusts motor speed to maintain synchronization of the rotor to the stator under all conditions. This unique feature allows step motors to operate in a much broader range of applications than previously possible, such as torque-control. The Stall Prevention feature also performs static position maintenance, which maintains the position of the motor shaft when at rest. Additionally, the inclusion of the optional encoder allows the motor to be precisely homed to the index (marker) pulse.


All ST drives are CE approved and RoHS compliant.

## Specifications

<b>Model Number:</b>	ST5-Si-NE
<b>Part Number:</b>	5000-131
<b>Supply Voltage:</b>	24-48 VDC
<b>Supply Voltage Type:</b>	DC
<b>Control Modes:</b>	Si Programming
<b>Output Current:</b>	0.1-5.0 A/phase
<b>Communication Ports:</b>	RS-232
<b>Encoder Feedback:</b>	Yes
<b>Step Resolution:</b>	Microstepping Microstep Emulation
<b>Idle Current Reduction:</b>	0-90%
<b>Setup Method:</b>	Software setup
<b>Digital Inputs:</b>	8
<b>Digital Outputs:</b>	4
<b>Dimensions:</b>	5.0 x 3.0 x 1.75 inches
<b>Weight:</b>	10.4 oz
<b>Operating Temperature Range:</b>	0-70 °C
<b>Ambient Temperature Range:</b>	0-55 °C
<b>Ambient Humidity:</b>	90% max, non-condensing
<b>Status LEDs:</b>	1 red, 1 green
<b>Circuit Protection:</b>	Short circuit Over-voltage Under-voltage Over-temp


# Torque Curves

**HT11-012, HT11-013, 5014-842**  
24 VDC power supply, 20000 steps/rev

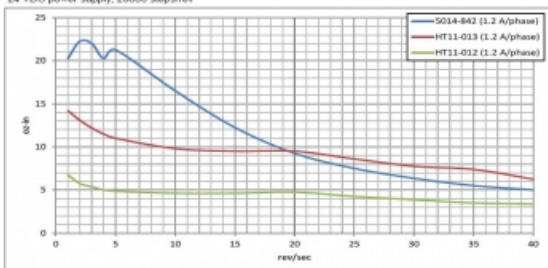


**HT17**

24 VDC power supply, 20000 steps/rev, all motors connected in parallel

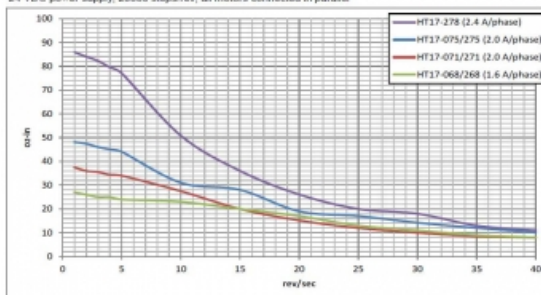


**HT17**

48 VDC power supply, 20000 steps/rev, all motors connected in parallel

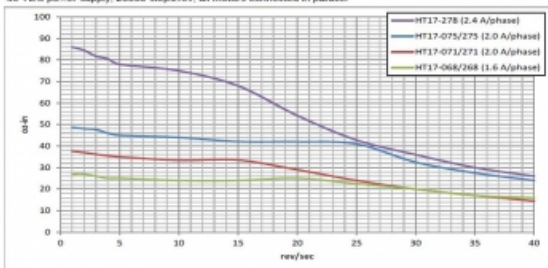


**HT23**

24 VDC power supply, 20000 steps/rev, all motors connected in parallel

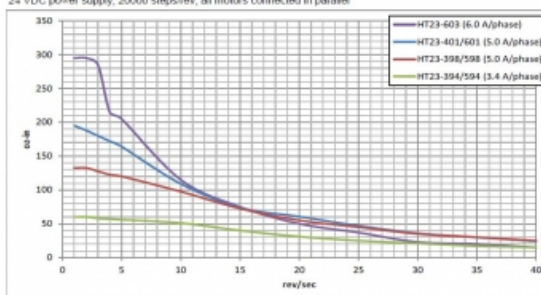


**HT23**

48 VDC power supply, 20000 steps/rev, all motors connected in parallel

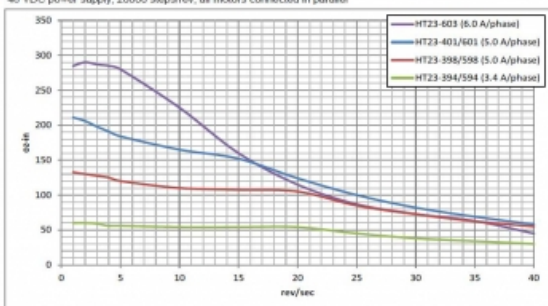


**HT24**

24 VDC power supply, 20000 steps/rev

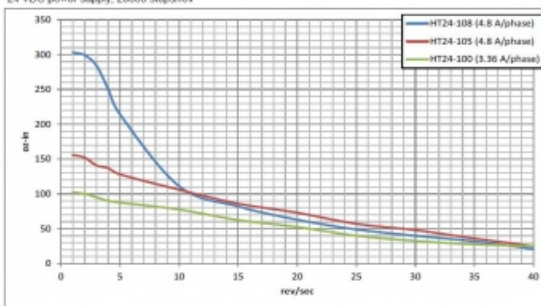

**HT24**

48 VDC power supply, 20000 steps/rev

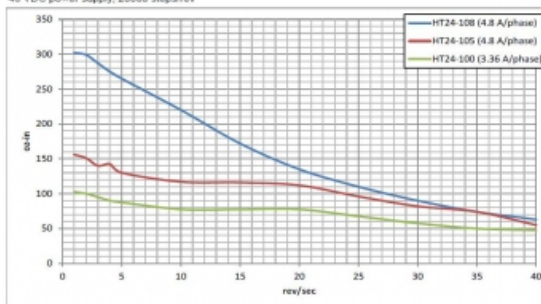

# Software


Software: [Si Programmer™](#)

## Downloads

<b>Manuals:</b>	<a href="#">ST5-10-QSi_Hardware_Manual_920-0004F-opt-.pdf</a> <a href="#">ST5_10_Si_QuickSetupGuide_920-0008D.pdf</a>
<b>Product PDF - S3 Link:</b>	<a href="http://s3.amazonaws.com/applied-motion-pdf/ST5-Si-NE.pdf">http://s3.amazonaws.com/applied-motion-pdf/ST5-Si-NE.pdf</a>
<b>Datasheet:</b>	<a href="#">ST-Datasheet_925-0007.pdf</a>
<b>2D Drawing:</b>	<a href="#">ST5_10_Dimensions.pdf</a> <a href="#">ST_T_simple_3D.pdf</a>
<b>3D Drawing:</b>	<a href="#">ST5_10-Q_Si_C_SIMPLE.igs</a>
<b>Speed-Torque Curves:</b>	<a href="#">ST_Speed_Torque_revF.pdf</a>
<b>Agency Approvals:</b>	<a href="#">ST-Q-Si-C-IP_CE_DOC.pdf</a>
<b>Application Notes:</b>	<a href="#">APPN0016_Simple-25-pin-mating-connections.pdf</a> <a href="#">APPN0015_Make-a-serial-programming-cable.pdf</a>

## 2D Drawings

### Mechanical Outline

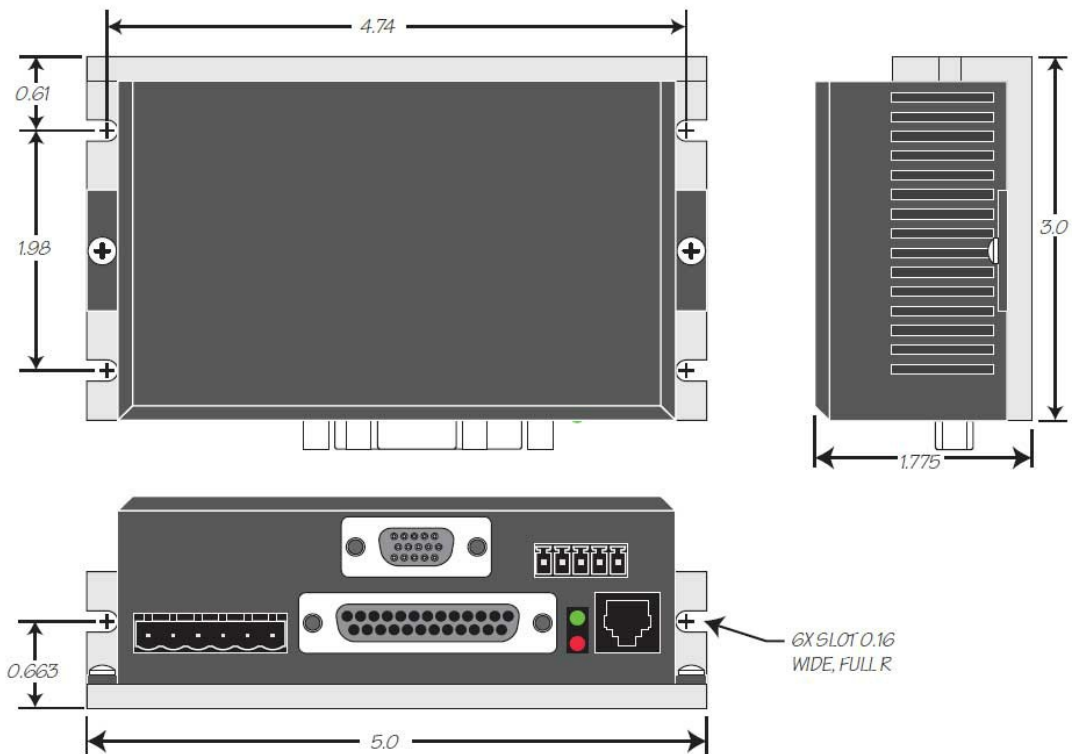

## Products in the Series *ST Stepper Drives*

Model Number	Supply Voltage	Control Modes	Output Current	Communication Ports	Encoder Feedback	1pc.
<a href="#">ST10-C-CE</a>	24-80 VDC	CANopen	0.1-10.0 A/Phase	RS-232, CANopen	Yes	\$818.00
<a href="#">ST10-C-CN</a>	24-80 VDC	CANopen	0.1-10.0 A/Phase	RS-232, CANopen	No	\$757.00
<a href="#">ST10-IP-EE</a>	24-80 VDC	Streaming Commands, Analog Positioning, Encoder Following, Q Programming, EtherNet/IP, Modbus TCP	0.1-10.0 A/Phase	Ethernet, EtherNet/IP	Yes	\$852.00
<a href="#">ST10-IP-EN</a>	24-80 VDC	Streaming Commands, Analog Positioning, Encoder Following, Q Programming, EtherNet/IP, Modbus TCP	0.1-10.0 A/Phase	Ethernet, EtherNet/IP	No	\$791.00
<a href="#">ST10-Plus</a>	24-80 VDC	Streaming Commands, Analog Positioning, Encoder Following, Q Programming	0.1-10.0 A/Phase	RS-232	No	\$322.00
<a href="#">ST10-Q-EE</a>	24-80 VDC	Step & Direction, Velocity (Oscillator), Streaming Commands, Analog Positioning, Encoder Following, Q Programming, Modbus TCP	0.1-10.0 A/Phase	Ethernet	Yes	\$871.00
<a href="#">ST10-Q-EN</a>	24-80 VDC	Step & Direction, Velocity (Oscillator), Streaming Commands, Analog Positioning, Encoder Following, Q Programming, Modbus TCP	0.1-10.0 A/Phase	Ethernet	No	\$792.00
<a href="#">ST10-Q-NE</a>	24-80 VDC	Step & Direction, Velocity (Oscillator), Streaming Commands, Analog Positioning, Encoder Following, Q Programming, SiNet Hub Compatible, Velocity Control, Modbus RTU	0.1-10.0 A/Phase	RS-232	Yes	\$696.00
<a href="#">ST10-Q-NF</a>	24-80 VDC	Step & Direction, Streaming Commands, Analog Positioning, Encoder Following, Q Programming, SiNet Hub Compatible, Velocity Control, Modbus RTU	0.1-10.0 A/Phase	RS-232	Yes	\$668.00
<a href="#">ST10-Q-NN</a>	24-80 VDC	Step & Direction, Velocity (Oscillator), Streaming Commands, Analog Positioning, Encoder Following, Q Programming, SiNet Hub Compatible, Modbus RTU	0.1-10.0 A/Phase	RS-232	No	\$618.00
<a href="#">ST10-Q-RE</a>	24-80 VDC	Step & Direction, Velocity (Oscillator), Streaming Commands, Analog Positioning, Encoder Following, Q Programming, Modbus RTU	0.1-10.0 A/Phase	RS-232, RS-485	Yes	\$828.00
<a href="#">ST10-Q-RN</a>	24-80 VDC	Step & Direction, Velocity (Oscillator), Streaming Commands, Analog Positioning, Encoder Following, Q Programming, Modbus RTU	0.1-10.0 A/Phase	RS-232, RS-485	No	\$756.00
<a href="#">ST10-S</a>	24-80 VDC	Step & Direction, Velocity (Oscillator), Streaming Commands, SiNet Hub Compatible	0.1-10.0 A/Phase	RS-232	No	\$274.00
<a href="#">ST10-Si-NE</a>	24-80 VDC	Si Programming	0.1-10.0 A/Phase	RS-232	Yes	\$756.00
<a href="#">ST10-Si-NF</a>	24-80 VDC	Si Programming	0.1-10.0 A/Phase	RS-232	Yes	\$763.00
<a href="#">ST10-Si-NN</a>	24-80 VDC	Si Programming	0.1-10.0 A/Phase	RS-232	No	\$696.00
<a href="#">ST5-C-CE</a>	24-48 VDC	CANopen	0.1-5.0 A/Phase	RS-232, CANopen	Yes	\$702.00
<a href="#">ST5-C-CN</a>	24-48 VDC	CANopen	0.1-5.0 A/Phase	RS-232, CANopen	No	\$649.00
<a href="#">ST5-IP-EE</a>	24-48 VDC	Streaming Commands, Analog Positioning, Encoder Following, Q Programming, EtherNet/IP, Modbus TCP	0.1-5.0 A/Phase	Ethernet, EtherNet/IP	Yes	\$786.00

<a href="#">ST5-IP-EN</a>	24-48 VDC	Streaming Commands, Analog Positioning, Encoder Following, Q Programming, EtherNet/IP, Modbus TCP	0.1-5.0 A/Phase	Ethernet, EtherNet/IP	No	\$728.00
<a href="#">ST5-Plus</a>	24-48 VDC	Streaming Commands, Analog Positioning, Encoder Following, Q Programming	0.1-5.0 A/Phase	RS-232	No	\$295.00
<a href="#">ST5-Q-EE</a>	24-48 VDC	Step & Direction, Velocity (Oscillator), Streaming Commands, Analog Positioning, Encoder Following, Q Programming, Modbus TCP	0.1-5.0 A/Phase	Ethernet	Yes	\$737.00
<a href="#">ST5-Q-EN</a>	24-48 VDC	Step & Direction, Velocity (Oscillator), Streaming Commands, Analog Positioning, Encoder Following, Q Programming, Modbus TCP	0.1-5.0 A/Phase	Ethernet	No	\$677.00
<a href="#">ST5-Q-NE</a>	24-48 VDC	Step & Direction, Velocity (Oscillator), Streaming Commands, Analog Positioning, Encoder Following, Q Programming, SiNet Hub Compatible, Modbus RTU	0.1-5.0 A/Phase	RS-232	Yes	\$648.00
<a href="#">ST5-Q-NF</a>	24-48 VDC	Step & Direction, Streaming Commands, Analog Positioning, Encoder Following, Q Programming, SiNet Hub Compatible, Velocity Control, Modbus RTU	0.1-5.0 A/Phase	RS-232	Yes	\$636.00
<a href="#">ST5-Q-NN</a>	24-48 VDC	Step & Direction, Velocity (Oscillator), Streaming Commands, Analog Positioning, Encoder Following, Q Programming, SiNet Hub Compatible, Modbus RTU	0.1-5.0 A/Phase	RS-232	No	\$560.00
<a href="#">ST5-Q-RE</a>	24-48 VDC	Step & Direction, Velocity (Oscillator), Streaming Commands, Analog Positioning, Encoder Following, Q Programming, Modbus RTU	0.1-5.0 A/Phase	RS-232, RS-485	Yes	\$750.00
<a href="#">ST5-Q-RN</a>	24-48 VDC	Step & Direction, Velocity (Oscillator), Streaming Commands, Analog Positioning, Encoder Following, Q Programming, Modbus RTU	0.1-5.0 A/Phase	RS-232, RS-485	No	\$684.00
<a href="#">ST5-S</a>	24-48 VDC	Step & Direction, Velocity (Oscillator), Streaming Commands, SiNet Hub Compatible	0.1-5.0 A/Phase	RS-232	No	\$247.00
<a href="#">ST5-Si-NE</a>	24-48 VDC	Si Programming	0.1-5.0 A/Phase	RS-232	Yes	\$695.00
<a href="#">ST5-Si-NF</a>	24-48 VDC	Si Programming	0.1-5.0 A/Phase	RS-232	Yes	\$727.00
<a href="#">ST5-Si-NN</a>	24-48 VDC	Si Programming	0.1-5.0 A/Phase	RS-232	No	\$588.00