




Aeotec WallMote

(Z-Wave WallMote)

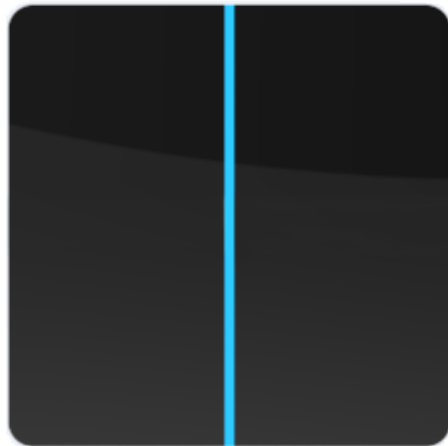

Change history

Revision	Date	Change Description
1	12/20/2016	Initial draft.
2		
3		
4		
5		
6		
7		

Aeotec WallMote

Engineering Specifications and Advanced Functions for Developers

Aeotec WallMote is a wall controller based on Z-Wave enhanced 232 slave library of V6.61.00.

Aeotec WallMote is an intelligent Z-Wave remote controller that mounted on a wall. It has 2 touch buttons that you can easily control the Z-Wave devices in your home network via touching, long pressing or sliding the button areas.

Its surface has a RGB LED to indicate the button actions also accompanied by touch beep and vibration.

The WallMote is also a security Z-Wave plus device and supports the Over The Air (OTA) feature for the product's firmware upgrade.

WallMote can be included and operated in any Z-Wave network with other Z-Wave certified devices from other manufacturers and/or other applications. All non-battery operated nodes within the network will act as repeaters regardless of vendor to increase reliability of the network.

It also supports Security Command Class and has the AES 128 bit security encryption built right in, so a security enabled controller is needed for fully to utilize its function.

1. Library and Command Classes:

1.1 SDK:6.61.00

1.2 Library:

- Basic Device Class: BASIC_TYPE_ROUTING_SLAVE
- Generic Device class: GENERIC_TYPE_WALL_CONTROLLER
- Specific Device Class: SPECIFIC_TYPE_BASIC_WALL_CONTROLLER

1.3 Commands:

	Non-Security Controller		Security Controller
--	--------------------------------	--	----------------------------


Node Info Frame	COMMAND_CLASS_ZWAVEPLUS_INFO_V2, COMMAND_CLASS_ASSOCIATION_V2, COMMAND_CLASS_ASSOCIATION_GRP_INFO_V1, COMMAND_CLASS_MULTI_CHANNEL_ASSOCIATION_V3, COMMAND_CLASS_MULTI_CHANNEL_V4, COMMAND_CLASS_VERSION_V2, COMMAND_CLASS_CONFIGURATION_V1, COMMAND_CLASS_MANUFACTURER_SPECIFIC_V2, COMMAND_CLASS_DEVICE_RESET_LOCALLY_V1, COMMAND_CLASS_POWERLEVEL_V1, COMMAND_CLASS_WAKE_UP_V2, COMMAND_CLASS_BATTERY V1 COMMAND_CLASS_NOTIFICATION_V4, COMMAND_CLASS_CENTRAL_SCENE_V2 COMMAND_CLASS_SECURITY, COMMAND_CLASS_FIRMWARE_UPDATE_MD_V2, COMMAND_CLASS_MARK, COMMAND_CLASS_SWITCH_BINARY_V2, COMMAND_CLASS_SWITCH_MULTILEVEL_V4,	COMMAND_CLASS_ZWAVEPLUS_INFO V2, COMMAND_CLASS_POWERLEVEL V1, COMMAND_CLASS_SECURITY
Security Command Supported Report Frame	-	COMMAND_CLASS_VERSION V2, COMMAND_CLASS_ASSOCIATION V2, COMMAND_CLASS_ASSOCIATION_GRP_INFO V1, COMMAND_CLASS_MULTI_CHANNEL_ASSOCIATION V3, COMMAND_CLASS_MULTI_CHANNEL V4, COMMAND_CLASS_MANUFACTURER_SPECIFICV2, COMMAND_CLASS_DEVICE_RESET_LOCALLY V1, COMMAND_CLASS_WAKE_UP V2, COMMAND_CLASS_BATTERY V1 COMMAND_CLASS_NOTIFICATION V4, COMMAND_CLASS_CENTRAL_SCENE_V2 COMMAND_CLASS_CONFIGURATION V1, COMMAND_CLASS_FIRMWARE_UPDATE_MD V2, COMMAND_CLASS_MARK, COMMAND_CLASS_SWITCH_BINARY V2, COMMAND_CLASS_SWITCH_MULTILEVEL V4,

2. Technical Specifications

Operating distance: Up to 394 feet/120 meters outdoors.

3. Familiarize yourself with your WallMote

3.1 Interface

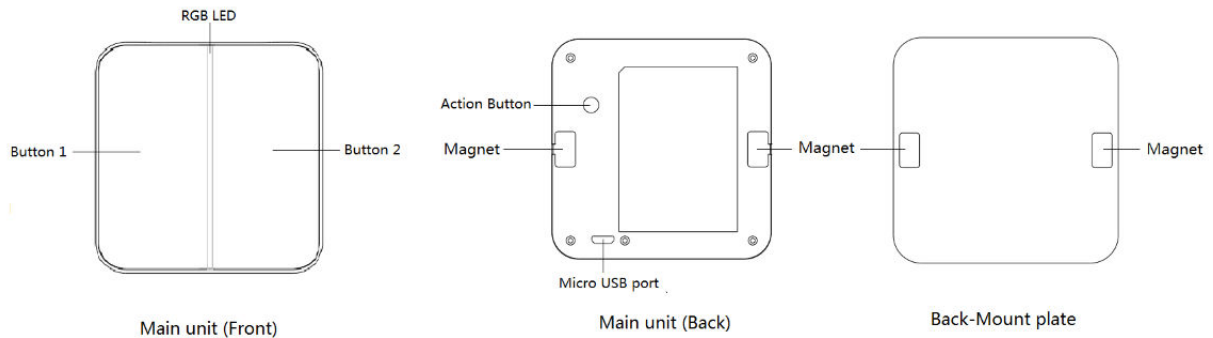

4. Button functions

4.1 Action Button

Trigger	Description
Click the Action Button one time	<ol style="list-style-type: none"> 1. Send out a node info frame that does not contain Security CC in the node info list. 2. Add WallMote into Z-Wave Network (<i>Non-security inclusion</i>) <ol style="list-style-type: none"> 1) Let the primary controller into inclusion mode (If you don't know how to do this, please refer to its manual). 2) Press the Action Button. 3) If your WallMote has been successfully added to your Z-Wave network, its green LED will be solid for 2 seconds and then off. Otherwise, please repeat the process from step 2 3. Remove WallMote from Z-Wave Network: <ol style="list-style-type: none"> 1) Let the primary controller into exclusion mode (If you don't know how to do this, refer to its manual). 2) Press the Action Button. 3) If your WallMote is successfully removed from the Z-Wave network, the LED will become a colourful gradient for a few seconds and then turn off. Otherwise, please repeat the process from step 2. <p>Note: If WallMote is removed from Z-Wave network, it will be reset to factory default.</p>
Click the Action Button 2 times within 1.5 seconds	<ol style="list-style-type: none"> 1. Send out a node info frame that contains the Security CC in the node info list. 2. Add WallMote into Z-Wave Network (<i>Security inclusion</i>) <ol style="list-style-type: none"> 1) Let the primary controller into inclusion mode (If you don't know how to do this, please refer to its manual). 2) Press the Action Button 2 times. 3) The blue LED will be on for 2 seconds. Otherwise, please repeat the process from step 2.

	<p>3. Remove WallMote from Z-Wave Network:</p> <ol style="list-style-type: none"> 1) Let the primary controller into exclusion mode (If you don't know how to do this, refer to its manual). 2) Press the Action Button. 3) If your WallMote is successfully removed from the Z-Wave network, the LED will become a colourful gradient for a few seconds and then turn off. Otherwise, please repeat the process from step 2. <p>Note: If WallMote is removed from Z-Wave network, it will be reset to factory default.</p>
Press and hold Action Button for 3 seconds and then released	<ol style="list-style-type: none"> 1. Send Wake Up Notification. 2. Toggle on/off 10 minutes wake up state.
Press and hold Action Button for 13 seconds and then released	Enable/disable the touch sound.
Press and hold Action Button for 18 seconds and then released	Enable/disable the touch vibration.
Press and hold Action Button for 20 seconds and then released	<p>Reset WallMote to Factory Default:</p> <p>Note:</p> <ol style="list-style-type: none"> 1. This procedure should only be used when the primary controller is missing or inoperable. 2. Reset WallMote to factory default settings will: <ol style="list-style-type: none"> a) remove WallMote from Z-Wave network; b) clear the Association settings; c) reset the configuration settings to the default.

4.2 Control buttons

Association Group	Control Button	Control commands	Description
1 (Lifeline)	Button 1 to 2	Central Scene Notification	Central Scene control via Button 1 to 2
2	Button 1	Basic Set	On/Off control via Button 1

3	Button 1	Multilevel Switch Set	Dimmer control via Button 1
4	Button 2	Basic Set	On/Off control via Button 2
5	Button 2	Multilevel Switch Set	Dimmer control via Button 2

Note: The association group 1 only can add max 1 node, this association node usually is the SIS (primary controller) or Node 1.

The priority of destination node that Wake Up Notification will be sent to

Destination nodes	Priority
The Node configured by Wake up Interval set command	Supreme
First Associated Node	Middle
Broadcast	Low

5. Special rule of each command

5.1 Basic Command Class

When the control button is pressed once, the WallMote will send Basic Set = 0x00/0xFF to the associated nodes in association group 2 or 4.

5.2 Z-Wave Plus Info Report Command Class

Parameter	Value
Z-Wave Plus Version	1
Role Type	4 (ROLE_TYPE_SLAVE_PORTABLE)
Node Type	0 (NODE_TYPE_ZWAVEPLUS_NODE)
Installer Icon Type	0x1C02 (ICON_TYPE_SPECIFIC_DIMMER_WALL_SWITCH_TWO_BUTTONS)
User Icon Type	0x1C02 (ICON_TYPE_SPECIFIC_DIMMER_WALL_SWITCH_TWO_BUTTONS)

5.3 Manufacturer Specific Report

Parameter	Value
Manufacturer ID 1	AEOTEC=0x00
Manufacturer ID 2	AEOTEC=0x86
Product Type ID 1	EU=0x00, US=0x01, AU=0x02 CN=0x1D (29)
Product Type ID 2	0x02
Product ID 1	0x00

Product ID 2	0x81 (129)
--------------	------------

5.4 Association Command Class

The WallMote supports 5 association groups. Group 1 is the lifeline group and can add **Max 1** node. Group 2-5 can add **Max 5 nodes**.

Association Group	Control Button	Nodes	Send commands
1 (Lifeline)	Button 1 to 2	1	Central Scene Notification
2	Button 1	[1,5]	Basic Set
3	Button 1		Multilevel Switch Set
4	Button 2		Basic Set
5	Button 2		Multilevel Switch Set

5.5 Association Group Info Command Class

5.5.1 Association Group Info Report Command Class

Profile: General: NA (Profile MSB=0, Profile LSB=1)

5.5.2 Association Group Name Report Command Class

Group 1: Lifeline

Group 2: On/Off control (Button 1)

Group 3: Dimmer control (Button 1)

Group 4: On/Off control (Button 2)

Group 5: Dimmer control (Button 2)

5.6 Multi Channel Command Class

The WallMote supports 2 Multi Channel endpoints. All endpoints have the same Device/Role Type and support the same optional command classes.

Generic Device class: GENERIC_TYPE_WALL_CONTROLLER

Specific Device Class: SPECIFIC_TYPE_BASIC_WALL_CONTROLLER

Multi Channel endpoint 1 and 2 capability command classes:

- COMMAND_CLASS_ZWAVEPLUS_INFO
- COMMAND_CLASS_ASSOCIATION
- COMMAND_CLASS_ASSOCIATION_GRP_INFO
- COMMAND_CLASS_MULTI_CHANNEL_ASSOCIATION
- COMMAND_CLASS_CENTRAL_SCENE
- COMMAND_CLASS_MARK
- COMMAND_CLASS_SWITCH_MULTILEVEL

COMMAND_CLASS_BASIC

When the WallMote is associated to other multi channel nodes, the Multi channel encapsulated Basic CC or Multilevel Switch CC will be sent to the associated multi channel nodes in association group 2, 3, 4 and 5 when pressing the touch buttons.

Control Button	End Point	Association Group	Multi Channel Node IDs	Send commands
Button 1	1	2	[1,5]	Multi Channel encapsulates Basic CC
Button 1		3	[1,5]	Multi Channel encapsulates Multilevel Switch CC
Button 2	2	4	[1,5]	Multi Channel encapsulates Basic CC
Button 2		5	[1,5]	Multi Channel encapsulates Multilevel Switch CC

5.7 Notification Command Class

Notification Type		Notification Events	
Power Management	0x08	Previous Events cleared	0x00
		Battery is charging	0x0C
		Battery is fully charged	0x0D
		Charge battery soon	0x0E
		Charge battery now	0x0F

5.8 Configuration Set Command Class

7	6	5	4	3	2	1	0
Command Class = COMMAND_CLASS_CONFIGURATION							
Command = CONFIGURATION_SET							
Parameter Number							
Default	Reserved					Size	
Configuration Value 1(MSB)							
Configuration Value 2							
.....							
Configuration Value n(LSB)							

Parameter Number Definitions (8 bit):

Parameter Number Hex / Decimal	Description	Default Value	Size

0x01 (1)	Enable/disable the touch sound. 0 = Disable 1 = Enable	1	1
0x02 (2)	Enable/disable the touch vibration. 0 = Disable 1 = Enable	1	1
0x03 (3)	Enable/disable the function of button slide. 0 = Disable 1 = Enable	1	1
0x04 (4)	To configure which report will be sent when pressing the buttons. 1 = Send Central Scene Command Notification 3 = Send Central Scene Command Notification and Configuration report.	1	1
0x27 (39)	Set the low battery value. Range: 5% to 50%.	5 (%)	1
0xFF (255)	1, Value=0x55555555, Default=1, Size=4 Reset to factory default setting and removed from the z-wave network	N/A	4
	2, Value=0, Default=1, Size=1 Reset to factory default setting	N/A	1