

Irwanto 29

by Irwanto Irwanto

Submission date: 14-Jul-2022 09:47AM (UTC+0700)

Submission ID: 1870296625

File name: SolarIrradianceandOptimumEdited_IJRAET_Latest_Golongan.pdf (258.49K)

Word count: 2782

Character count: 13242

1

See discussions, stats, and author profiles for this publication at: <https://www.researchgate.net/publication/311886785>

Solar irradiance and optimum tilt angle of photovoltaic module in Tanjung Morawa, North Sumatera, Indonesia

Article · October 2015

CITATIONS

4

READS

3,287

1 author:



Muhammad Irwanto

170 PUBLICATIONS 1,420 CITATIONS

[SEE PROFILE](#)

1

Some of the authors of this publication are also working on these related projects:



hybrid system and clean energy [View project](#)



CHANGE FOR THE BETTER , INSPIRE THE NEXT AND BE ORIGINAL [View project](#)

21
Solar irradiance and optimum tilt angle of photovoltaic module in Tanjung Morawa, North Sumatera, Indonesia

M. Irwanto

26
Department of Electrical Engineering, Medan Institute of Technology, Medan, Indonesia.

23
Abstract

The performance of a photovoltaic (PV) module is influenced by its tilt angle with the horizontal, due to the tilt angle change the amount of climate condition (solar irradiance and temperature) reaching the surface of the PV module. The optimum tilt angle is needed to get the maximum solar irradiance and the minimum temperature along day reaching the surface of the PV module. This paper presents a calculation of the tilt angles and the solar irradiance on PV module in Tanjung Morawa, North Sumatera, Indonesia. A mathematical modeling is used to calculate the tilt angles and the solar irradiance, which depend on latitude and day number. The optimum tilt angle of PV module is determined by searching a yearly maximum total and average solar irradiance. The tilt angles of PV module in Medan, are -19.92° to 26.08° . The positive, zero and negative tilt angles indicate that the PV module is inclined to face south, on horizontal surface and north, respectively. The yearly minimum, maximum and average solar irradiance are 988.5 W/m^2 and 1123 W/m^2 and 1061 W/m^2 , respectively. For Tanjung Morawa, North Sumatera, Indonesia (has latitude 3.53° N) is recommended that the optimum tilt angle of the PV module from the horizontal be put equal to 5.08° (an angle of the latitude of the location $+1.55^{\circ}$).

Keywords: Solar irradiance, temperature, tilt angle, photovoltaic.

1. Introduction

The performance of a photovoltaic (PV) is highly influenced by its orientation and its tilt angle with the horizontal, due to the fact that both the orientation and tilt angle change the amount of solar radiation reaching the surface of the PV module, presented by Chang [1]. The tilt angle of the fixed-structure PV module should be carefully evaluated for different places and periods of time to obtain the maximum overall output electric energy. A mathematical model was used by Kacira [2] to estimate the global solar irradiance on the tilt PV surface, and to determine optimum tilt angles for PV module, the optimum tilt angle were determined by searching for the value of angle for which the global irradiance on the PV module surface was maximum. Empirical correlation for estimating the solar irradiance incident on horizontal surface have been proposed by El-Sebaei [3], the result shown that in Jeddah (Saudi Arabia), the solar irradiance have to be tilted to face south with a tilt angle equals the latitude of the place in order to achieve the best performance all year round.

The optimum tilt angles of the PV module at any latitude, for any surface azimuth angles and on a day or a month of a year, have to be determined for design purpose. Definite value is rarely given by researchers for optimum tilt angles. The suggested optimum tilt by Mahmoud [4] is latitude angle $\pm 15^{\circ}$, (latitude angle $+ 15^{\circ}$) $\pm 15^{\circ}$ by Masters [5] and latitude angle $\pm 15^{\circ}$ by Yorukoglu [6]. The optimal PV tilt angle and orientation depend on the local climate, the load consumption temporal profile and latitude. Research result of Kuin [7] shown that using PV mounting structure of adjustable tilt angle can be obtained PV performance improvement of 5.6%.

This paper presents a calculation of the tilt angle and the solar irradiance on PV module in Medan, Indonesia. Method of Pandey [8] is used to calculate the tilt angle and the solar irradiance, which depend on latitude and day number. The tilt angle and solar irradiance change every day in a year and analyzed. The monthly average solar irradiance are shown and analyzed in this paper.

2 Methodology

2.1 Latitude of Tanjung Morawa

Tanjung Morawa is situated in Deli Serdang regency, North Sumatera, Indonesia. It has latitude of 3.53° N and land area of $131,75 \text{ km}^2$ as shown in Figure 1.



Fig 1: Map of Tanjung Morawa has latitude of 3.53° N and land area of $131,75 \text{ km}^2$ [9]

2.2 Solar Irradiance

The electricity power generated by PV systems is directly related to the solar energy received by the PV module, while the PV module can be placed at any orientations and any tilt angles, but most local observatories only provide solar irradiance data on a horizontal surface. Thus, an estimation of solar irradiance on a tilt surface is calculated by adding the beam, diffuse, and reflected solar irradiance components on the tilt surface together by Pandey^[8], as in Figure 2.

The total solar irradiance on tilt surface is given by:

$$I_{tt} = I_{bt} + I_{dt} + I_{rt} \quad (1)$$

where I_{tt} is the total solar irradiance on the tilt surface, W/m^2 ; I_{bt} is the total beam solar irradiance absorbed by the tilt surface, W/m^2 ; I_{dt} is the total diffuse solar irradiance absorbed by the tilt surface, W/m^2 ; and I_{rt} is the total reflected solar irradiance absorbed by the tilt surface, W/m^2 .

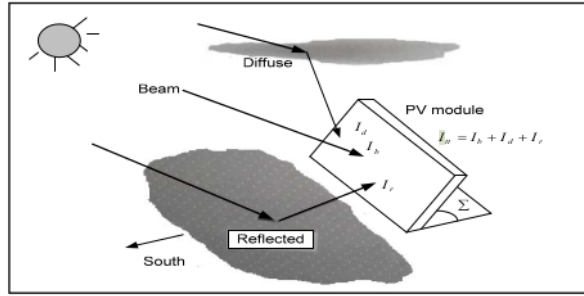


Fig 2: Total solar irradiance of tilt surface of PV module

2.2.1 Beam Solar Irradiance

The translation of direct-beam irradiance I_b (normal to the rays) into beam irradiance striking a PV module face I_{bt} is a simple function of the angle of incidence θ between a line drawn normal to the PV module face and the incoming beam irradiance. It is given by

$$I_{bt} = I_b \cos \theta \quad (2)$$

where I_b is the beam portion of the radiation reaching the earth's surface (normal to the rays), is given by

$$I_b = A e^{-kn} \quad (3)$$

where A is an "apparent" extraterrestrial flux, and k is a dimensionless factor called the optical depth, given by

$$A = 1160 + 75 \sin \left[\frac{360}{365} (n - 275) \right] \quad (4)$$

$$k = 0.174 + 0.035 \sin \left[\frac{360}{365} (n - 100) \right]$$

(5)

The air mass ratio m is given by

$$m = \frac{1}{\sin \beta} \quad (6)$$

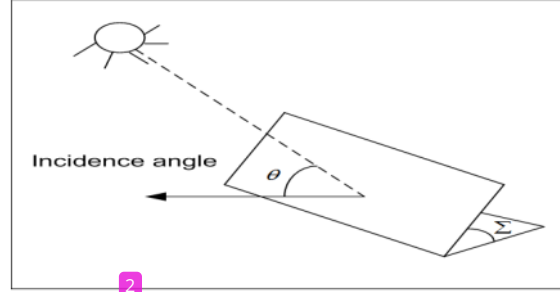


Fig 3: The incidence angle θ between a normal to the PV module face and the incoming solar beam irradiance

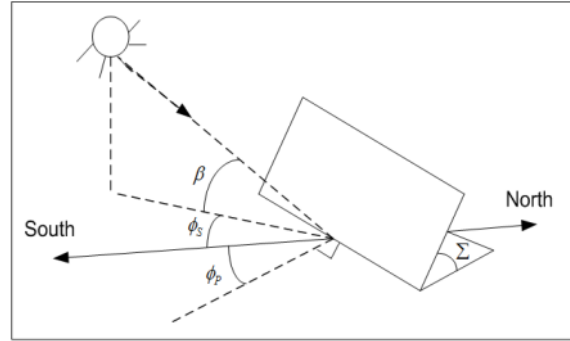


Fig 4: Illustrating the PV azimuth angle ϕ_p and tilt angle Σ along with the solar azimuth angle ϕ_s and altitude angle β .

Azimuth angles are positive in the southeast direction and are negative in the southwest

The angle of incidence θ will be a function of the photovoltaic orientation and the altitude and azimuth angles of the sun at any particular time. Figure 5 introduces these importance angles. The photovoltaic is tipped up at angle Σ and faces in a direction described by its azimuth angle ϕ_p (measured relative to due south, with positive value in the southeast and negative value in the southwest). The incidence angle is given by

$$\cos \theta = \cos \beta \cos(\phi_s - \phi_p) \sin \Sigma + \sin \beta \cos \Sigma \quad (7)$$

The solar azimuth angle ϕ_s is given by Pandey^[8]

$$\sin \phi_s = \frac{\cos \delta \sin H}{\cos \beta} \quad (8)$$

where H is hour angle (the number of degrees that the earth must rotate before the sun will be directly over local meridian or line of longitude), is given by Castaner^[10]

$$H = \cos^{-1}(-\tan L \tan \delta) \quad (9)$$

2.2.2 Diffuse Solar Irradiance

The simplest models of diffuse irradiation assume it arrives at a site with equal intensity from all direction; that is, the sky is considered to be isotropic. Obviously, on hazy or overcast days the sky is considerably brighter in the vicinity of the sun, and measurements show a similar phenomenon on clear days as well, but these complications are often ignored. The following expression for diffuse irradiance on the photovoltaic module.

$$I_{dt} = CI_b \left(\frac{1 + \cos \Sigma}{2} \right) \quad (10)$$

where C is a sky diffuse factor and a convenient approximation is as follows :

$$C = 0.095 + 0.04 \sin \left[\frac{360}{365} (n - 100) \right] \quad (11)$$

2.2.3 Reflected Solar Irradiance

The final component of irradiance striking a photovoltaic module results from radiation that is reflected by surfaces in front of the module. The simplest model assumes a large horizontal area in front of the module, with a reflectance ρ that is diffuse, and it bounce the reflected irradiance in equal intensity in all direction. The solar reflected irradiance is given by

$$I_{rt} = \rho I_b (\sin \beta + C) \left(\frac{1 - \cos \Sigma}{2} \right) \quad (12)$$

2.3 Tilt Angle of a PV Module

An altitude angle or solar angle β_N is an angle between the sun and the local horizontal directly beneath the sun. The altitude angle of the sun at solar noon is shown in Figure. 5. From Figure. 5 can be written down the following relationship by inspection:

$$\beta_N = 90^\circ - L + \delta \quad (13)$$

$$\Sigma = 90^\circ - \beta_N \quad (14)$$

where L is the latitude of the site, δ is solar declination (the angle formed between the plane of the equator and a line drawn from the centre of the sun to the centre of the earth) and Σ is tilt angle of PV module. According to Pandey [8], the solar declination δ is given by:

$$\delta = 23.45 \sin \left[\frac{360}{365} (n - 81) \right] \quad (15)$$

where n is day number, with January 1 as day 1 and December 31 being day number 365.

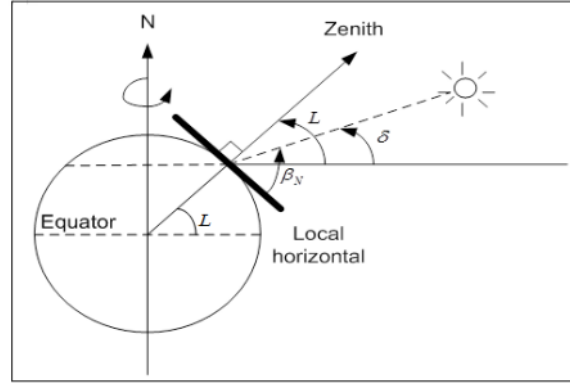


Fig 5: The altitude angle of the sun at solar noon

3 Results and Discussion

3.1 Tilt Angle of PV Module

The tilt angles of PV module were calculated using Equation (13) to (15) for a year. The first, the solar declination δ was calculated for 365 days in a year and latitude of Tanjung Morawa is 3.53° N substituted in (13), finally the tilt angle Σ could be calculated using Equation (14). The tilt angles of PV module in Tanjung Morawa are shown in Figure 6.

The tilt angles have positive degree which indicate that the PV module is inclined to face south, negative degree indicate that it inclined to face north and zero degree indicate that it on horizontal surface Daut^[11].

Figure 6 shows that the tilt angles can be divided to three parts, exactly positive, zero and negative. From the 1st January to the 30th March, the tilt angles of PV module in Tanjung Morawa are positive (26.54° on the 1st January and 0.31° on the 30th March) which indicate that the PV module inclined to face south. For the 31st March and the 13th September, the tilt angles are 0° which indicate that the PV module on the horizontal surface. From the 1st April to the 12th September, the tilt angles are negative (-0.09° on the 1st April and -0.26° on the 12th September), maximum negative is -19.92° on the 21st June which indicate that the PV module inclined to face north. From the 13th September to the 31st December, the tilt angles are positive (0.14° on the 13th September and 26.98° on the 31 December), maximum positive is 27.03° on the 23rd December which indicate that the PV module inclined to face south.

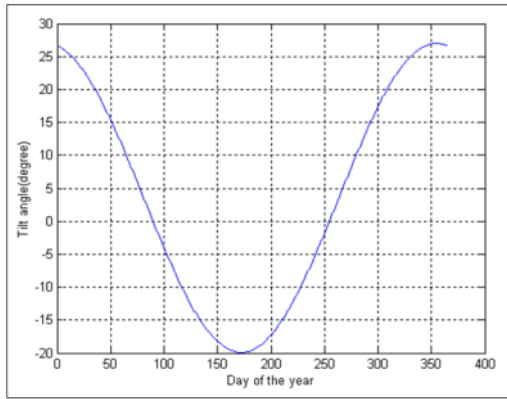


Fig 6: The tilt angle of PV module in Medan, Indonesia

3.2 Solar Irradiance on 16 Tilt Angles of PV Module

The effect of tilt angles of PV module on solar irradiance is calculated using Equation (1) and (5) to (15) for a year. The solar irradiance on tilt angles of PV module are shown in Figure. 7.

Figure. 7 shows that the minimum, maximum and average solar irradiance are 988.5 W/m², 1123 W/m² and 1061 W/m² which indicate that the sky in Tanjung Morawa is clear and very high for a year and gives potential for PV power generation (Daut^[11]).

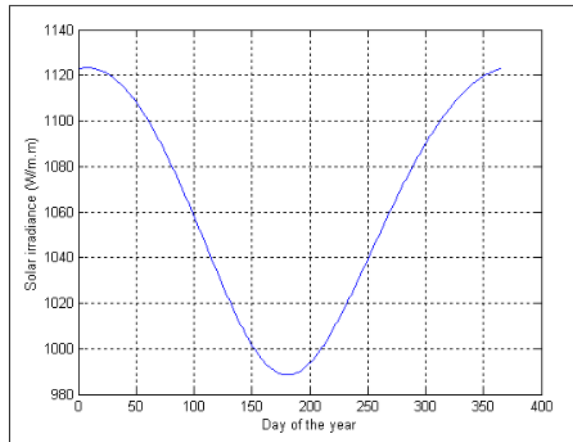


Fig 7: Solar irradiance on tilt angles of PV module

3.3 Optimum Tilt Angles of PV Module

Figure 8 indicates that the tilt angle has a very significant effect on the solar irradiance through the year. For the different tilt angle, the PV module has different solar irradiance through the year. For -19.92° of the PV module tilt angle, the minimum, maximum and average solar irradiance are 784.1 W/m², 1027 W/m² and 938.3 W/m², respectively. For horizontal PV module, the minimum, maximum and average solar irradiance are 934.7 W/m², 1081 W/m² and 1016 W/m², respectively. For 5.08° of the PV module tilt angle, the minimum, maximum and average solar irradiance are 905.3 W/m², 1092 W/m² and 1019 W/m², respectively. For 26.08° of the PV module tilt angle, the minimum, maximum and average solar irradiance are 724 W/m², 1123 W/m² and 960 W/m², respectively.

Every tilt angle (-19.92° to 26.08°) of PV module in Medan is calculated to find the yearly total and average solar irradiance. The optimum tilt angle of PV module is determined by searching a yearly maximum total and average solar irradiance. This choice based on that under constant temperature if the solar irradiance increases, output power and efficiency of the PV module will increase (Castaner^[10]). Figure 9 and 10 show the annual total and average solar irradiance on different tilt angle of PV module.

Figure 9 and 10 show that the annual maximum total and average solar irradiance are 372,000 W/m² and 1019 W/m² on 5.08° of the PV module tilt angle. Under this solar irradiance and constant temperature, the PV module will produce the highest output power and efficiency.

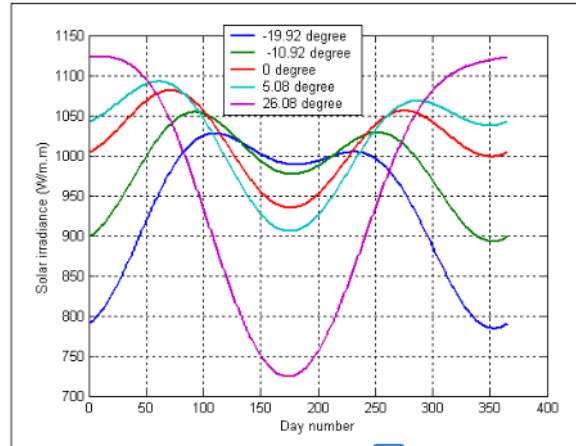


Fig 8: Solar irradiance through the year on different tilt angle of PV module

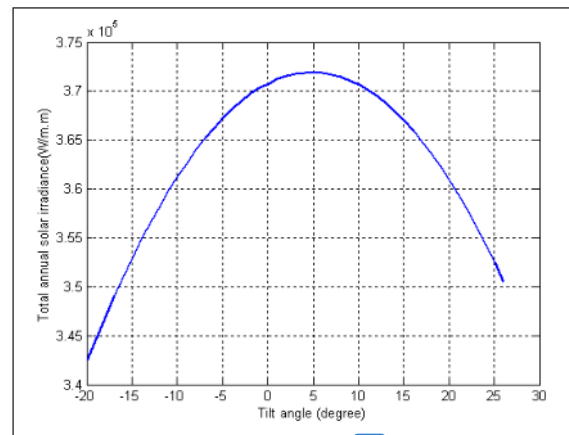


Fig 9: Annual total solar irradiance on different tilt angle of PV module

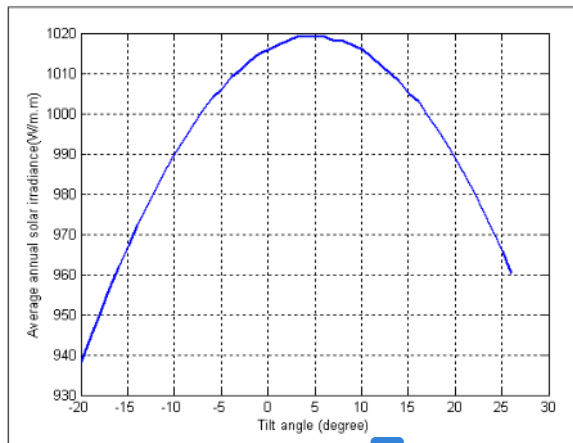


Fig 10: Annual average solar irradiance on different tilt angle of PV module

4. Conclusion

The tilt angles of PV module effect on the solar irradiance that fall on its surface. The tilt angles of PV module in Tanjung Morawa, North Sumatera, Indonesia are -19.92° to 26.08° . The positive, zero and negative tilt angles indicate that the PV module is inclined to face south, on horizontal surface and north, respectively.

The optimum tilt angle of PV module was determined by searching a yearly maximum total and average solar irradiance. The annual maximum total and average solar irradiance are $372,000 \text{ W/m}^2$ and 1019 W/m^2 on 5.08° of the PV module tilt angle. Under this solar irradiance and constant temperature, the PV module will produce the highest output power and efficiency. For Tanjung Morawa, North Sumatera, Indonesia as latitude 3.53° N is recommended that the optimum tilt angle of the PV module from the horizontal be put equal to 5.08° (an angle of the latitude of the location $+1.55^{\circ}$).

5. References

- Chang YP. Optimal the tilt angles for photovoltaic modules in Taiwan. *Journal of Electrical Power and Energy Systems*. 2010, 1-9.
- Kacira M, Simsek M, Babur Y, Demirko S. Determining optimum tilt angles and orientations of photovoltaic panels in Sanliurfa, Turkey. *Journal of Renewable Energy*. 2004; 5:1265-1275.
- El-Sebaei AA, Al-Hazmi FS, Al-Ghamdi AA, Yaghmour, S.J. (2010). Global, direct and diffuse solar radiation on horizontal and tilt surfaces in Jeddah, Saudi Arabia. *Journal of Applied Energy*. 2010; 87:568–576.
- Mahmoud M, Nabhan I. Determination of optimum tilt angle of single and multi rows of photovoltaic arrays for selected area in Jordan. *Journal of Solar & Energy*. 7:739–745.
- Masters GM. *Renewable and efficient electric power systems*. New jersey: John Wiley & Sons, Inc. 2004.
- Yorukoglu M, Celik AN. A Critical Review on the Estimation of Daily Global Solar Radiation from Sunshine Duration", *Energy Conversion & Management*. 2006, 2441-2450.
30. In TH, Ramsey W, Threlkeld JL. *Thermal environment Engineering*. Prentice-Hall, Englewood Cliffs, NJ, 1998.
- Pandey CK. A note on diffuse solar radiation on a tilted surface. *Journal of Energy*. 34, 1764–1769.
- https://www.google.com/?gws_rd=ssl#q=Tanjung+Morawa
9. aut I, Sembiring M, Irwanto M, Syafawati N, Hadi S. Solar Radiation Potential For Photovoltaic Power Generation Based on Meteorological Data in Perlis. *International Conference: Electrical Energy and Industrial Electronic Systems EEIES2009*, Penang, Malaysia. 2009.

ORIGINALITY REPORT

21 %
SIMILARITY INDEX

11 %
INTERNET SOURCES

11 %
PUBLICATIONS

9 %
STUDENT PAPERS

PRIMARY SOURCES

1	lahore.comsats.edu.pk Internet Source	1 %
2	Submitted to Hebron University Student Paper	1 %
3	www.ee.unlv.edu Internet Source	1 %
4	Submitted to University of Aberdeen Student Paper	1 %
5	studentsrepo.um.edu.my Internet Source	1 %
6	Diaf, S.. "Design and techno-economical optimization for hybrid PV/wind system under various meteorological conditions", Applied Energy, 200810 Publication	1 %
7	pdffox.com Internet Source	1 %
8	www.mdpi.com Internet Source	1 %

9	ajbasweb.com Internet Source	1 %
10	scholar.najah.edu Internet Source	1 %
11	www.geog.com.cn Internet Source	1 %
12	Junjie Cai, Zhenhua Quan, Tianyao Li, Longshu Hou, Yaohua Zhao, Mengliang Yao. "Performance study of a novel hybrid solar PV/T ground-source heat pump system", Procedia Engineering, 2017 Publication	1 %
13	www.ijert.org Internet Source	1 %
14	Submitted to Asian Institute of Built Environment (AIBE) Student Paper	1 %
15	www.astesj.com Internet Source	1 %
16	M. Irwanto, R. Badlishah, M. Masri, Y. M. Irwan, N. Gomesh. "Optimization of photovoltaic module electrical characteristics using genetic algorithm (a comparative study between simulation and data sheet of PV Module)", 2014 IEEE 8th International Power	1 %

Engineering and Optimization Conference (PEOCO2014), 2014

Publication

17

Khatib, T.. "Optimization of a PV/wind micro-grid for rural housing electrification using a hybrid iterative/genetic algorithm: Case study of Kuala Terengganu, Malaysia", Energy & Buildings, 201204

Publication

1 %

18

ccsenet.org

Internet Source

1 %

19

Elminir, H.K.. "Optimum solar flat-plate collector slope: Case study for Helwan, Egypt", Energy Conversion and Management, 200603

Publication

<1 %

20

Submitted to Universiti Putra Malaysia

Student Paper

<1 %

21

Submitted to University of East London

Student Paper

<1 %

22

bc.pollub.pl

Internet Source

<1 %

23

Submitted to Kingston University

Student Paper

<1 %

24

core.ac.uk

Internet Source

<1 %

25

Internet Source

<1 %

26

Mahrizal Masri, R. Badlisha, Muhamad Irwanto, N. Gomesh, Y.M. Irwan, F. Malek, Hermansyah Alam, M.R. Mamat. "Effect of Maximum Voltage Angle on Inverter Performance Applied in Uninterrupted Power Supply (UPS)", Applied Mechanics and Materials, 2015

Publication

<1 %

27

Qusay Hassan, Saadoon Abdul Hafedh, Ali Hasan, Marek Jaszczur. "Evaluation of energy generation in Iraqi territory by solar photovoltaic power plants with a capacity of 20 MW", Energy Harvesting and Systems, 2022

Publication

<1 %

28

Utkarsh Jadli, Shailesh Uniyal, Ishita Uniyal. "Chapter 110 Design of a Single-Axis Solar Tracker Using LDRs", Springer Science and Business Media LLC, 2018

Publication

<1 %

29

veniciachang.blogspot.com

Internet Source

<1 %

30

www.teknologikarastirmalar.com

Internet Source

<1 %

31 Mondol, J.D.. "The impact of array inclination and orientation on the performance of a grid-connected photovoltaic system", Renewable Energy, 200701

<1 %

Publication

32 Önder Kaşka, Recep Yumrutaş, Orhan Arpa. "Theoretical and experimental investigation of total equivalent temperature difference (TETD) values for building walls and flat roofs in Turkey", Applied Energy, 2009

<1 %

Publication

33 Monica Chinchilla, David Santos-Martín, Miguel Carpintero-Rentería, Scott Lemon. "Worldwide annual optimum tilt angle model for solar collectors and photovoltaic systems in the absence of site meteorological data", Applied Energy, 2021

<1 %

Publication

34 Seyedeh Sahar Hosseini, Abas Ramiar, Ali Akbar Ranjbar. "Numerical investigation of natural convection solar air heater with different fins shape", Renewable Energy, 2018

<1 %

Publication

Exclude quotes Off

Exclude matches Off

Exclude bibliography Off