



Mu-TEST

The ATE game changer

M-5S: 5 slots electro-mechanical structure




Key Benefits

- ↳ Desktop compatible configuration for easy integration into engineering environments
- ↳ Up to 256 pins, compatible with low to medium pincounts, pre-series or medium scale volume production test
- ↳ Calibration and diagnostic load board, for easy and fast acceptance and maintenance procedures
- ↳ 5 slots POGO frame included
- ↳ Workstation and MuTool software license included, for fully integrated test solution

Key Features

- 5 universal slots
- Dimensions:
 - Length: 73 cm
 - Width: 48 cm
 - Height: 25 cm
- Weight: 14 kg (unloaded)
 - + 1.4 kg per populated slot
- 110/230 47..63 Hz AC Input
- +5, +15, - 15 Volts user power supply
- Utility bits
- Air cooled system
- Windows 7 & 8 OS
- < 600 Watts power fully loaded
- Gateway interface:
 - 1 Gb/s Ethernet
 - IEEE488 / GPIB Dongle

Back view with gateway interfaces

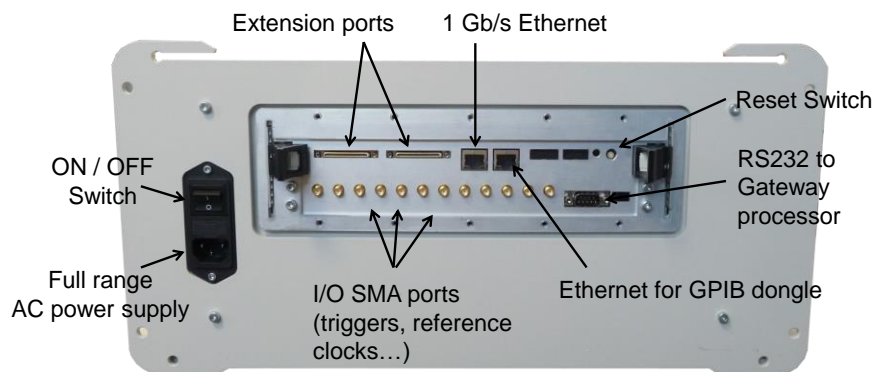

Notes:


- Extension ports enable connection between different systems



Mu-TEST

The ATE game changer

M-21S: 21 slots electro-mechanical structure

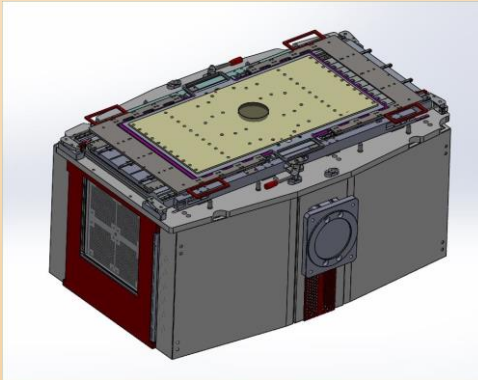


Key Benefits

- ↪ Up to 1280 pins, compatible with medium to high pincounts, and parallel production test
- ↪ Zero or low footprint thanks to dense hardware design, minimizing floor space requirements, hence Cost of Test
- ↪ Air cooled system, reducing operating expenses (electricity, facilities...), hence Cost of Test
- ↪ Calibration and diagnostic load board, for easy and fast acceptance and maintenance procedures
- ↪ 21 slots POGO frame included, compatible with 5S POGO frame
- ↪ Workstation and MuTool software license included, for fully integrated test solution

Key Features

- 21 universal slots
- Dimensions:
 - Length: 107 cm
 - Width: 79 cm
 - Height: 53 cm
- Weight: 150 kg (unloaded with docking plate)
 - + 1.4 kg per populated slot
- 110/230 47..63 Hz AC Input
- +5, +15, - 15 Volts user power supply
- Utility bits
- Air cooled system
- Windows 7 & 8 OS
- < 3 k Watts power fully loaded
- Gateway interface:
 - 1 Gb/s Ethernet
 - IEE488 / GPIB Dongle

Back view with gateway interfaces

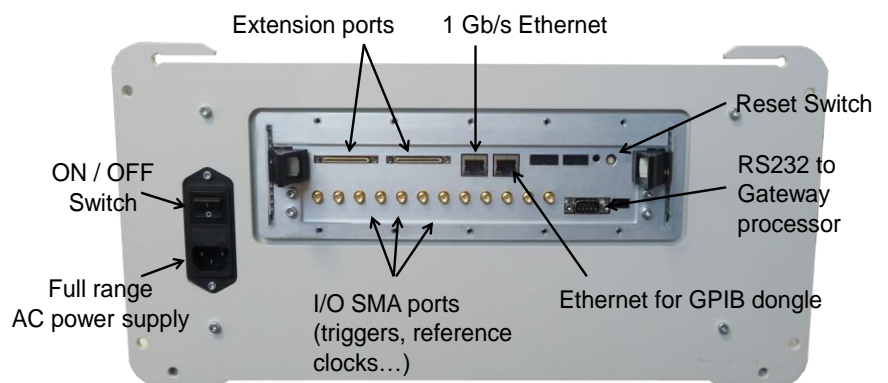

Notes:

- Extension ports enable connection between different systems