

WARNING

- ** WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN **
- * Switch off the main electrical supply from the main fuse box / circuit breaker before installation.
 - * Inspect item carefully before attempting to install.
 - * If there is any damages or obvious defects, do not install.
 - * Item may not be returned once it has been installed.















CARE AND MAINTENANCE

- * To clean the outside of the fixture, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the surface of the fixture.
- * To clean the inside of the fixture, first disconnect power to the fixture by turning off the circuit breaker or by removing the fuse at the fuse box. Next, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the interior surface of the fixture.
- * Do not use any cleaners with chemical, solvents or harsh abrasives. Use only a dry soft cloth to dust or wipe carefully.

NOTICE& IMPORTANT SAFETY INSTRUCTIONS

- * Please make sure that you have all parts indicated before you begin assembly of this item
 - * This item should be assembled on a soft surface to prevent scratching the finish during assembly
 - * To reduce the risk of fire, electrical shock or injury to persons or property, please follow the guideline below for safe use and installation
 - *The external flexible cable or cord of this lamp cannot be replaced
- If the cord is damaged, the lamp shall be destroyed

Part List and Hardware List

PIECE	DESCRIPTION	PICTURE	QUANTITY	PIECE	DESCRIPTION	PICTURE	QUANTITY
A	Mounting Plate		1 X	G	Long Roped Tube		1 X
B	Canopy		1 X	H	Shade		1 X
C	Hanging Loop		1 X	I	Finial		1 X
D	Canopy Nut		1 X	J	Short Roped Tube		3 X
E	Chain		1 X	K	Wire Nut		3 X
E 1	Closable link/ cap		2 X	L	Mounting Screw Size : 8/32*30m m		2 X
F	Socket Assembly		1 X	M	Bulb		3 X




ITEM#:LIT4476 A/B/C
Product Dimension:Ø18” X 35.5”H




PREPARATION

- * Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list.
- * If any part is missing or damaged, do not attempt to assemble the product.
- * Estimated Assembly Time:30 minutes
- * If you are having difficulty, our friendly Customer Care team is always here to help. Please email customersupport@safavieh.com




NOTE: PLEASE USE TYPE "B" BULB MAX 40-WATT OR CFL BULB MAX 13-WATT OR LED MAX 9-WATT, THERE ARE 3* LED 4W BULBS IN THE BOX.

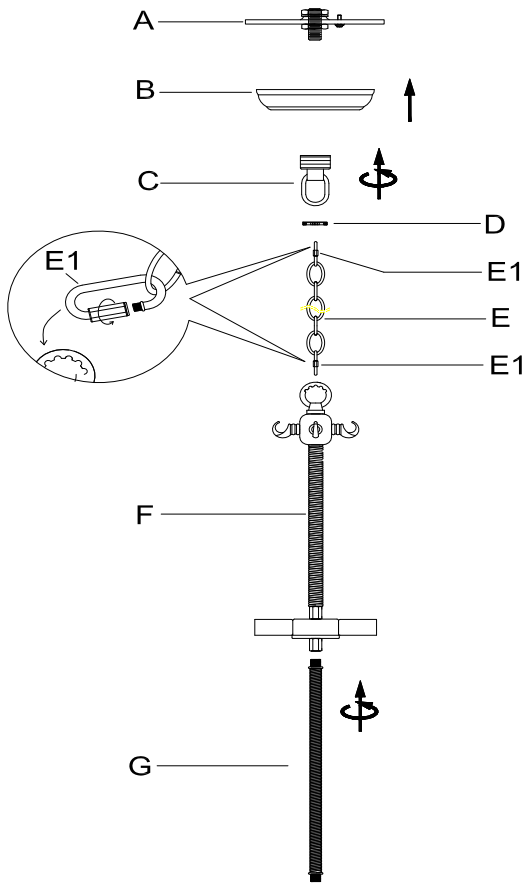

Step 1: Unpack all parts from cartons carefully. Insert one end threaded portion of the Long Roped Tube(G) into the tube underneath the Socket Assembly (F). Screw the Chain(E) to the loopsof the Metal Plate(B) and the Socket Assembly(F) as diagram.

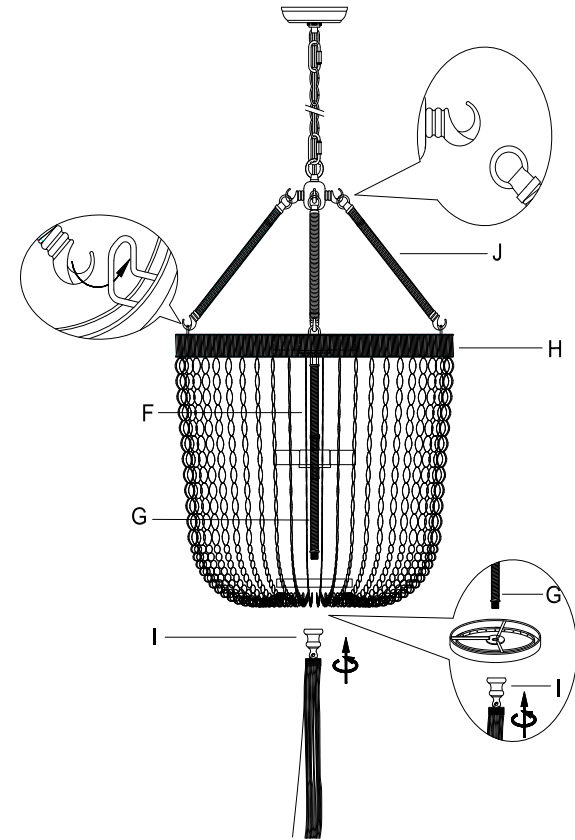

Step 2:Place the Shade(H) around the Socket Assembly(F) and fix the upper shade by matching the upper loops of the Short Roped Tube(J) to the hooks of the Socket Assembly(F) , lower hooks of the Short Roped Tube(J) to the hooks of the Shade(H) as diagram. Insert the lower end of the Long Roped Tube(G) into the center hole of bottom Shade(H) spider and fix it by turning the Finial(I) clockwise till tight.

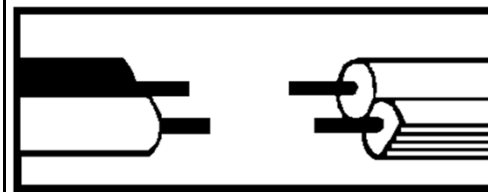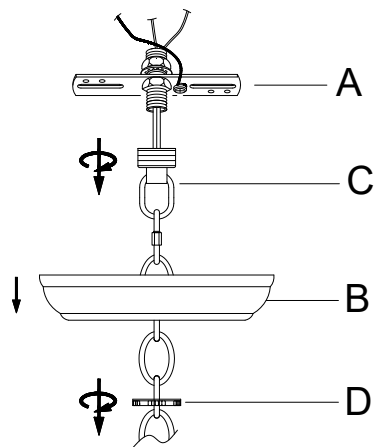

Step 4: Wire connection


Connect fixture neutral wire (ribbed) to the outlet box neutral wire (usually white) using a wire nut. Connect fixture hot wire (smooth with markings) to the outlet box hot wire (usually black) using a wire nut.

CAUTION: Do not reverse the hot and neutral connections

Grounding Instructions:

Wrap ground wire from outlet box around green ground screw(B) on mounting bracket, no less than 2" from wire end. Tighten ground screw. If fixture is supplied with a ground wire, connect to outlet ground wire with a wire connector.

Step 3: Separate the Mounting Plate(A) from the Canopy (B) by unscrewing the Canopy Nut(D) anti-clockwise.

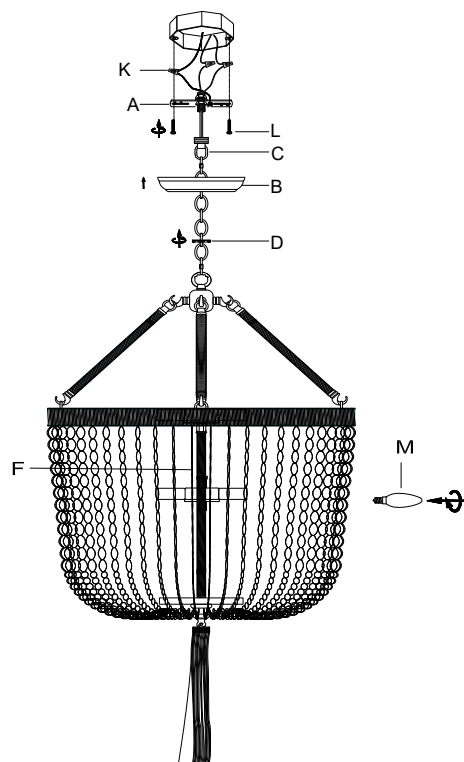

Step 5: Fix the Mounting Plate(A) to the junction box with Mounting Screw (L). Attach the Canopy(B) to the junction box and fix it by turning the Canopy Nut (D) clockwise. Insert the bulb (M) into the Socket.