



All New High Performance LED Pendants

Specification Guide

Suspension Systems

Cord & Cable Suspensions



Cord & Three Cable (CC3*)

Suspension Height
Cord & Cable suspensions are adjustable - both the power cord and aircraft cable can be trimmed in the field to reach the desired overall height (OAH). Refer to the options section of the spec sheet for availability.

Extension Options
C10 - 3’ to 10’ Cord/Cable
C20 - 10’ to 20’ Cord/Cable

Available Finishes
Applies to Canopy and Cord

BL
Black

NT
Nickel Tone

WHA
White

Suspension Height
Stem Mount suspensions are fixed in overall height (OAH) but can be extended utilizing pre-threaded stem extension kits (ordered separately). Refer to the accessories section of the spec sheet for availability.

Extension Accessories
390002xx - SSM Extension Kit: includes (1) 1’ stem and (2) 2’ stems. 5’ combined max.
390001xx - SCM Extension Kit: includes (1) 1’ stem and (2) 2’ stems. 5’ combined max.

Available Finishes
Applies to Canopy and Stem

BL
Black

BZ
Bronze

GM
Gun Metal


NT
Nickel Tone

PL
Platinum

MB
Metallic Bronze

MG
Metallic Gold

WH
White

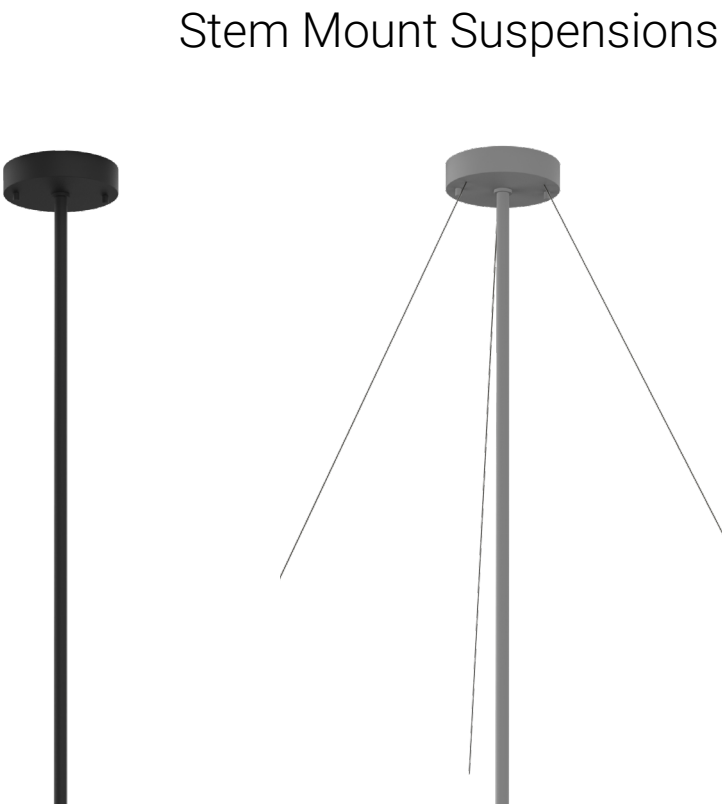

Single Stem Mount (SSM*) Stem & Cable Mount (SCM*)

LED Performance Data

		2700K		3000K		3500K		4000K		Size Availability
Code	Watts	Output	Efficacy	Output	Efficacy	Output	Efficacy	Output	Efficacy	
B06	5.99	625	104	680	114	700	117	700	117	13, 15
B12	11.63	1275	110	1385	119	1430	123	1430	123	13, 15
C09	8.32	1070	129	1160	139	1200	144	1225	147	13, 15
C17	15.57	1730	111	1975	127	2050	132	2090	134	13, 15
C24	22.45	2425	108	2760	123	2950	131	3000	134	13, 15, 20, 24, 30
C37	34.81	3630	107	4150	122	4380	126	4460	129	20, 24, 30, 36
C49	44.90	4850	108	5525	123	5900	131	6000	134	20, 24, 30, 36
H63	64.86	-	-	8890	137	8890	137	9226	142	36, 42, 48

*Notes: Lumen output measured from the source. Output shown in lumens (lm). Efficacy shown in lumens per watt (lm/W).

Insert Series Diffuser Options (2612, 2362, etc.)

BLU
Blue

LMG
Lime Green

LRD
Light Red

ORN
Orange

BMB
Bamboo

WHA
White Acrylic

PER
Pearl

SAP
Sapphire

GDM
Gold Mesh

Acrylic-Backed Fabric Series (2600, 2340, etc.)

WHL
White Linen

ROW
Rolling Waves

NAL
Natural Linen

MAL
Mahogany Linen

GYL
Grey Linen

WBK
Woven Black

*Diffuser availability varies by model. Refer to specification sheet for details.

Standard Diffuser Options*



2612-NT-BMB-SSM

Shade Top Cover



Top Cover Accessory
Three-piece white acrylic top cover which covers the gap between housing and shade. Field installable without needing to remove shade. This accessory does not “seal” the top of the shade, it is intended to be a shield for dust and debris only. Refer to the Accessories section of the specification sheet for availability.





2662-22-NT-GYL-CC1
Nickel Tone (NT) Finish with Grey Linen (GYL) Diffuser
Cord & Single Cable (CC1) Suspension

2616 LED

Size Options:

Shade Dia. x Height, Fixture OAH Utilizing Stem Suspension
(Refer to spec sheet for Cord & Cable OAH)

15"Ø x 4.5"H, 19" OAH
20"Ø x 5.25"H, 22" OAH
24"Ø x 8"H, 30" OAH
30"Ø x 8"H, 30" OAH

- Shade Detail: Acrylic outer shell with a flat, inset diffuser opening. Available in matte white acrylic or woven black fabric.
- Cleaning: Drum can be wiped down with a mild solution.



2616-NT-WHA-SSM



2616-NT-WBK-SSM



2616-NT-WHA-CC1
Nickel Tone (NT) Finish with White Acrylic (WHA) Diffuser
Cord & Single Cable (CC1) Suspension

2662 LED

Size Options:

Shade Dia. x Height, Fixture OAH
Utilizing Stem Suspension
(Refer to spec sheet for Cord & Cable OAH)

12"Ø x 11", 33" OAH
16"Ø x 15", 37" OAH
22"Ø x 20", 42" OAH


- The LED Assembly (housing) covers entire top surface of drum to minimize dust/debris-entry. Standard offering on the 2662 LED only.



2662-22-NT-WHL-CC1



2662-22-NT-WHL-SSM

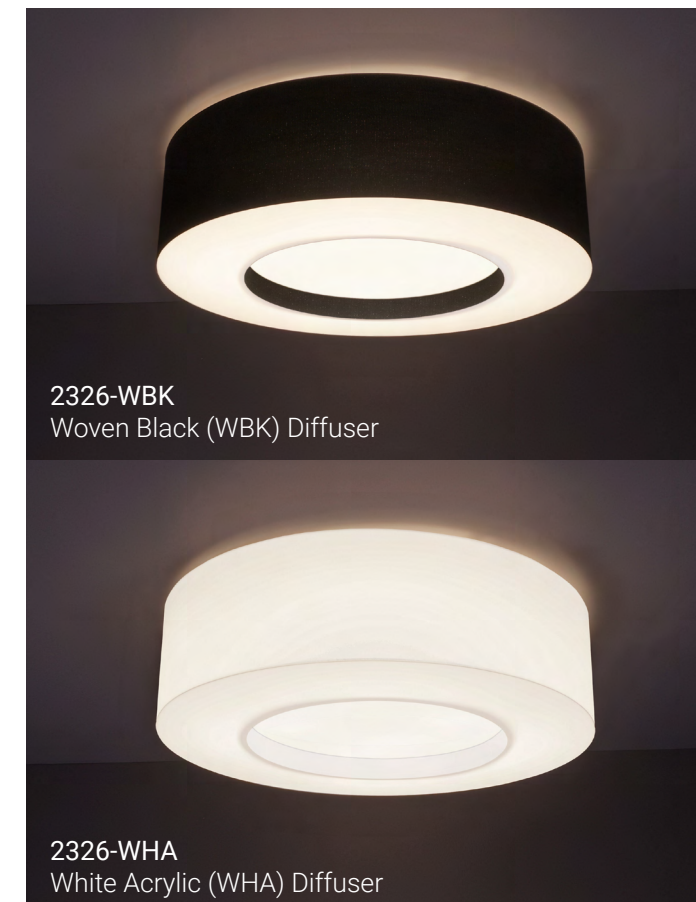

2326-WBK
Woven Black (WBK) Diffuser

2326-WHA
White Acrylic (WHA) Diffuser

2326 LED

Coordinating Flush Mount

Size Options:

15"Ø x 5" OAH
19.25"Ø x 5.75" OAH
24"Ø x 9" OAH
30"Ø x 9" OAH



2326-WBK

2600 LED

Size Options:

Shade Dia. x Height, Fixture OAH

Utilizing Stem Suspension

(Refer to spec sheet for Cord & Cable OAH)

15"Ø x 4.50"H, 19" OAH

20"Ø x 5.25"H, 22" OAH

24"Ø x 8"H, 30" OAH

30"Ø x 8"H, 30" OAH

36"Ø x 10"H, 40" OAH

42"Ø x 12"H, 48" OAH

48"Ø x 12"H, 48" OAH

- Shade Detail: White acrylic drum with bonded fabric overlay.

- Cleaning: Fabric can be gently cleaned with a mild detergent and water.



2600-NT-GYL-CC1



2600-NT-GYL-CC1
Nickel Tone (NT) Finish with Grey Linen (GYL)
Diffuser & Cord & Single Cable (CC1) Suspension



2600-NT-WHL-SSM



2600-NT-WBK-CC1



2600-NT-WHA-CC3



2600-NT-NAL-SCM



2600-NT-ROW-CC1



2600-NT-MAL-SCM



WBK



NAL



ROW



WHA



GYL



MAL



WHL

2340 LED

Coordinating Flush Mount

Size Options:

12.25"Ø x 5" OAH

15"Ø x 5" OAH

19.25"Ø x 5.75" OAH

24"Ø x 9" OAH

30"Ø x 9" OAH

36"Ø x 11" OAH

42"Ø x 13" OAH

48"Ø x 13" OAH

2322 LED

Coordinating Flush Mount

Size Option:

15"Ø x 5" OAH



WHL



GYL



NAL



MAL



ROW

2601 LED

Size Options:

Shade Dia. x Height, Fixture OAH Utilizing Stem Suspension
(Refer to spec sheet for Cord & Cable OAH)

24"Ø x 8.75"H, 30.75" OAH

30"Ø x 8.75"H, 30.75" OAH

- Shade Detail: White acrylic drum with real oak wood crossbar. Crossbar finish options include Natural (clear coat only), Chestnut Brown (painted) and a variety of other Brownlee finishes as standard.

- Cleaning: Drum can be wiped down with a mild solution.



2601-NT-NT-CC1

Trim Finishes



2341-BR

Chestnut Brown (BR) Trim



2601-NT-BR-CC1

Nickel Tone (NT) Finish with Chestnut Brown (BR) Trim
Cord & Single Cable (CC1) Suspension




2601-NT-NA-CC1

Nickel Tone (NT) Finish with Natural Wood (NA) Trim
Cord & Single Cable (CC1) Suspension



2341-BR

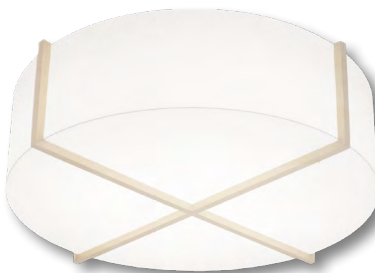

2341-NA



2341-NT

2341 LED

Coordinating Flush Mount


Size Options:

15"Ø x 5.75" OAH

19.25"Ø x 6.50" OAH

24"Ø x 9.75" OAH

30"Ø x 9.75" OAH

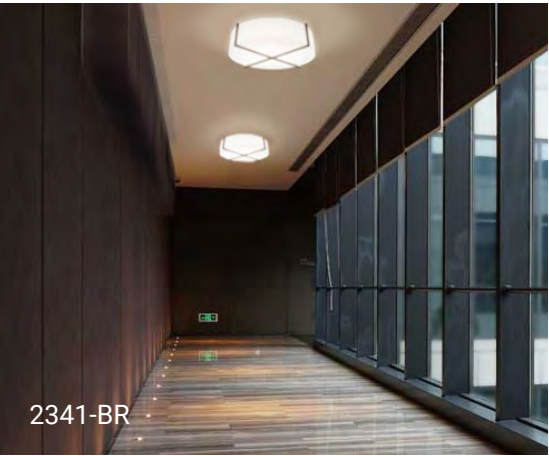

2341-BR

2608 LED

Size Options:

Shade Dia. x Height, Fixture OAH Utilizing Stem Suspension
(Refer to spec sheet for Cord & Cable OAH)

24"Ø x 9"H x 31" OAH

30"Ø x 9"H x 31" OAH

- Shade Detail: One-piece acrylic drum. Outer shell features a White Linen bonded overlay while the inner drum is matte white acrylic.

- Cleaning: Fabric can be gently cleaned with a mild detergent and water.



2608-NT-WHL-CC1

2612 LED

Size Options:

Shade Dia. x Height, Fixture OAH Utilizing Stem Suspension
(Refer to spec sheet for Cord & Cable OAH)

24"Ø x 8"H, 30" OAH

30"Ø x 8"H, 30" OAH


36"Ø x 10"H, 40" OAH

42"Ø x 12"H, 48" OAH

48"Ø x 12"H, 48" OAH

- Shade Detail: The 2612 is offered in a variety of vibrant colors and patterns which are bonded to the inner side of the frosted acrylic drum for added protection and durability. Custom color requests available.

- Cleaning: Drum can be wiped down with a mild solution.

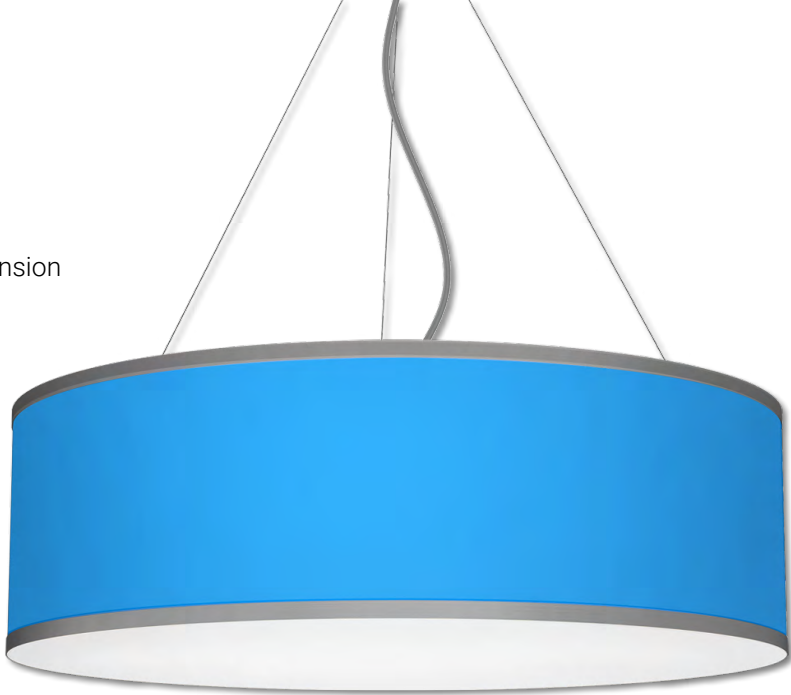

2612-NT-BLU-CC3



2612-NT-ORN-SSM



2612-NT-WHA-CC1



2612-NT-LMG-SSM



2612-NT-LRD-SSM



2612-NT-BMB-SSM



2612-NT-GDM-SCM



2612-NT-PER-CC1



2612-NT-SAP-SSM

2604 LED

Size Options:

Shade Dia. x Height, Fixture OAH Utilizing Stem Suspension (Refer to spec sheet for Cord & Cable OAH)

24"Ø x 9.5"H, 32" OAH

30"Ø x 9.5"H, 32" OAH

- Refer to the 2342 for a flush mount version of this product.

- Shade Detail: Two tier white acrylic drum with bonded fabric overlay.

- Cleaning: Fabric can be gently cleaned with a mild detergent and water.



2604-NT-NAL-CC1



2604-NT-MAL-CC1



2604-NT-WHA-CC3



2604-WH-WHL-SSM



2604-BL-ROW-SCM

2362 LED

Coordinating Flush Mount

Size Options:

24"Ø x 9" OAH

30"Ø x 9" OAH

36"Ø x 11" OAH

42"Ø x 13" OAH

48"Ø x 13" OAH



2362-NT-WHA

Diffuser Insert Options (contact factory for custom color requests)





2662-22-NT-GYL-SSM

Brownlee luminaires are assembled, tested and packaged at our headquarters in Orlando, Florida. We look forward to keeping jobs in America to provide for your lighting needs well into the future.

