



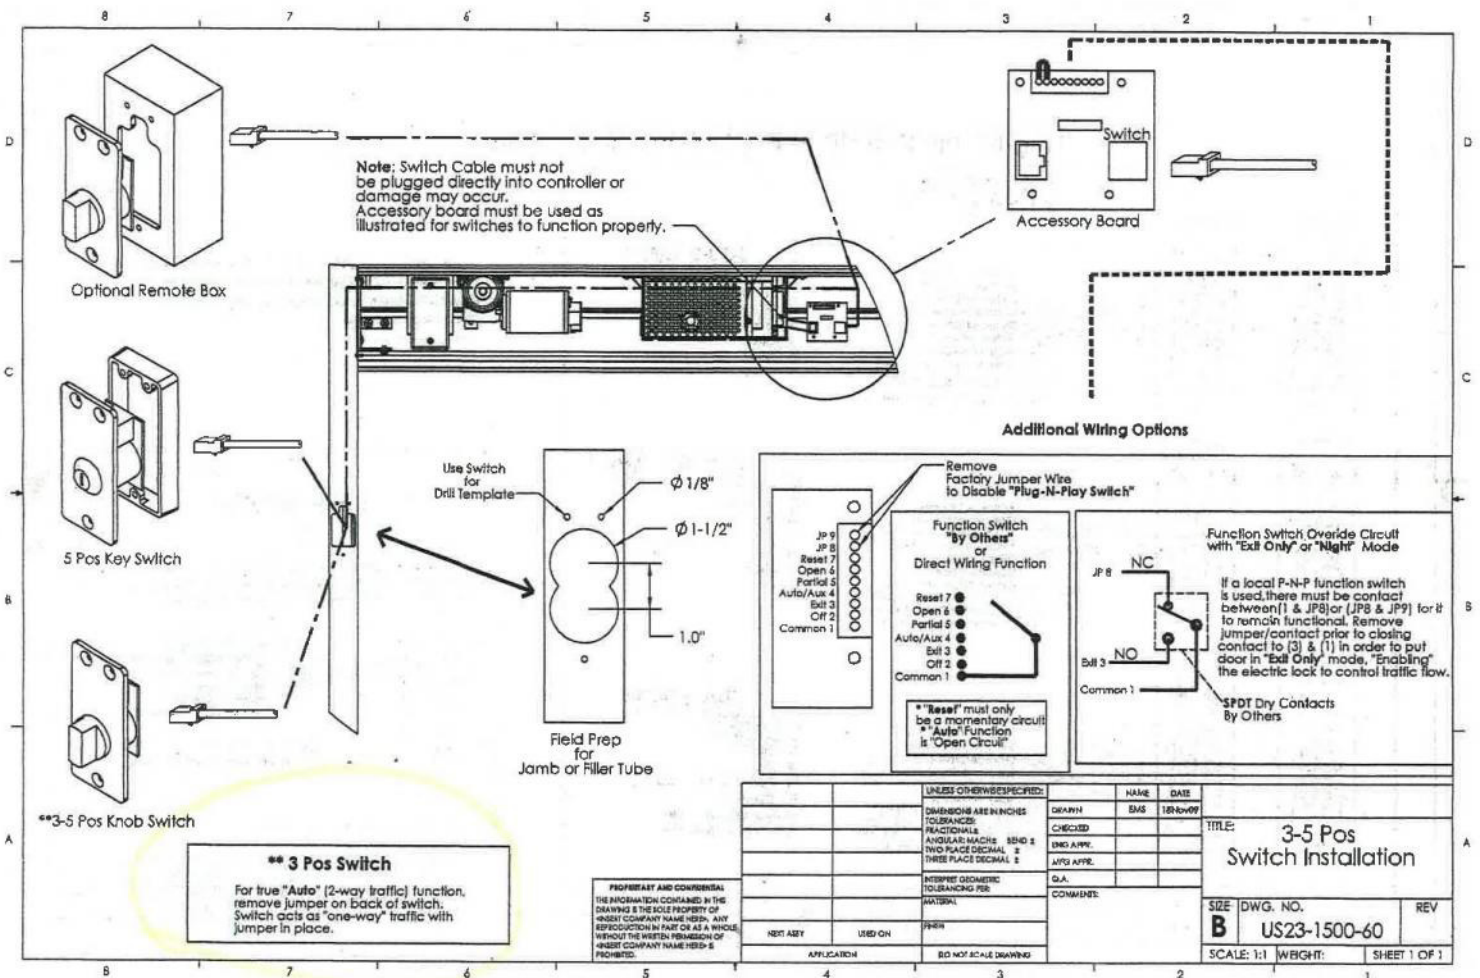

Plug-N-Play Retrofit to Pre-Unislide Controllers

5 Pos Switch

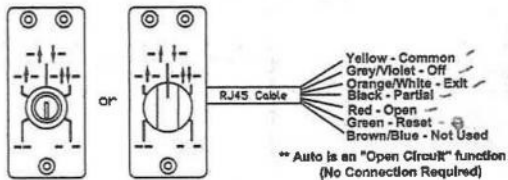

CUD-9 AMD 2

Pin - Function

- 1 Common
- 4 Off
- 3 Exit
- 2 Partial
- 13 Open
- R Reset

CUD-3CA AMD 1

Pin - Function

- 23 Common
- 18 Off
- 19 Exit
- 24 Partial or 20 Autowidth
- 21 Open
- 22 Reset


CUA PG4000

Pin - Function

- 12 Common - 1
- 9 Off - 2
- 10 Exit
- 13 Partial or 15 Autowidth
- 11 Open
- ** Reset @ Controller
- Not a switch function

* Cut plug off RJ45 Cable, Split cable sheath and strip wires as required. Insert in controller terminal block and tighten as per chart for correct operation.

3 Pos Switch

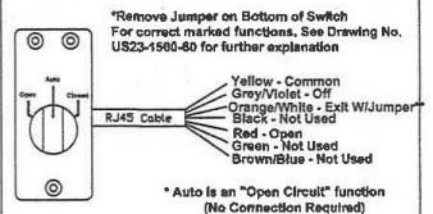

*Remove Jumper on Bottom of Switch
For correct marked functions. See Drawing No.
US23-1500-80 for further explanation

SIZE	FORM NO.	DWG NO.	REV
		US23-1500-81	
SCALE		3-5 Pos Switch Retro-Fit Instructions	SHEET