


**“IMPORTANT SAFETY INSTRUCTIONS – SAVE THESE INSTRUCTIONS” “DANGER – TO REDUCE THE RISK OF FIRE OR ELECTRIC SHOCK, CAREFULLY FOLLOW THESE INSTRUCTIONS”**

- 1) To be used with Hera Lighting, 350mA Constant Current Luminaires only.
- 2) Be sure to read and understand all instructions before installation. For best results have installed by a qualified technician.
- 3) Be sure to connect the light to the Driver first before connecting Driver to outlet. Failure to connect to an outlet in this order may cause damage and will void manufacturer’s warranty.
- 4) This LED Driver is NOT DIMMABLE. Connecting this Driver into a dimmable circuit may cause damage and will void warranty. When dimming is required use Hera Model# PSLED/DIM.
- 5) Use only insulated staples or plastic ties to secure cords.
- 6) Route and secure cords so they will not be pinched or damaged when the cabinet is pushed to the wall.
- 7) Be sure Driver is in location that is accessible for inspection.
- 8) The National Electrical Code (NEC) does not permit cords to be concealed where damage to insulation may go unnoticed. To prevent fire danger, do not run cords behind walls, ceiling soffits, or cabinets where it may be inaccessible for examination. Cords should be visually examined periodically and the transformer immediately replaced when any damage is noted.
- 9) “This fixture has a polarized plug (one blade is wider than the other) as a safety feature to reduce the risk of electric shock. This plug will fit in a polarized outlet only one way. If the plug does not fit fully in the outlet, reverse the plug. If it still does not fit, contact a qualified technician. Never use an extension cord unless the plug can be fully inserted. Do not alter the plug.”
- 10) There are no user serviceable parts inside Driver. Removal of cords or covers may damage product and will void warranty.
- 11) Any unused output ports must have jumper plugs installed.
- 12) Do not overload the Driver. Follow the Table below for loading information.

LED	Power	Quantity
ARFLED	3x1W	3
EH24LED	3x1W	3
ARFQLED	4x1W	2
EYELED	1x1W	10
FlexLED	1x1W	10
HO-LED	3x1.2W	2

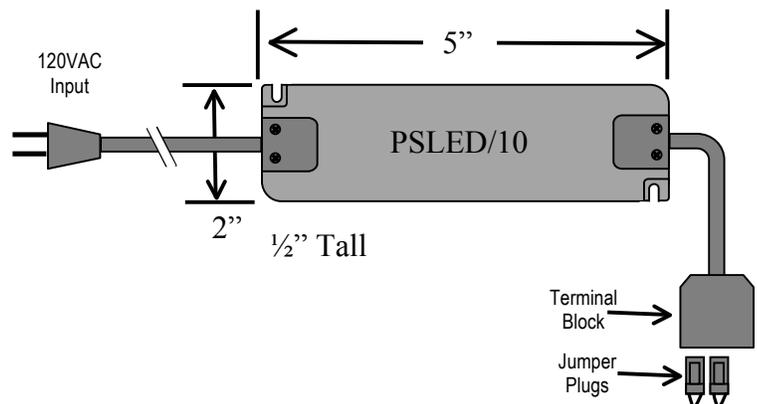

### Specifications:

Input: 120VAC, 60Hz, 0.28A  
Output: 350mA, 34VDC Max.  
Power Factor:  $\geq 0.5\lambda$   
Efficiency:  $\geq 80\%$   
Ambient operating temperature:  $-20^{\circ}\text{C} \sim 40^{\circ}\text{C}$   
Max case temperature:  $80^{\circ}\text{C}$   
Lifetime: 30,000 hrs at  $40^{\circ}\text{C}$  (max ambient)

### Troubleshooting:

For testing, insert 2 jumper plugs in the terminal block. Connect lights independently in the free terminal. This will identify the defective light. Or if no light operates, the LED Driver may be defective.