




Continuous Series 1 & 2



ACGI Cube Systems come in a variety of cell sizes, wood thicknesses and depths. Depending on project requirements, Cube panels can be factory or field-cut to size. Fixture cut-outs can be factory cut, but are typically cut to field conditions.


Cube-Continuous Series 1 [CC1] uses a wooden grid where panels connect via a "lap" joint. The series utilizes panels in 2'x2', 2'x4' or 4'x4' configurations that lay into one of three grid systems which produce an uninterrupted appearance across the ceiling area.

Cube-Continuous Series 2 [CC2] uses a $\frac{3}{8}$ " wooden grid with panels set into the grid via metal brackets. Perimeter conditions may require reveals to be placed between the panels and the structure. If the cubes are used in an island or floating configuration, vertical wood trim around the perimeter for both radius and straight profiles is available in matching or complimentary wood species and finishes.

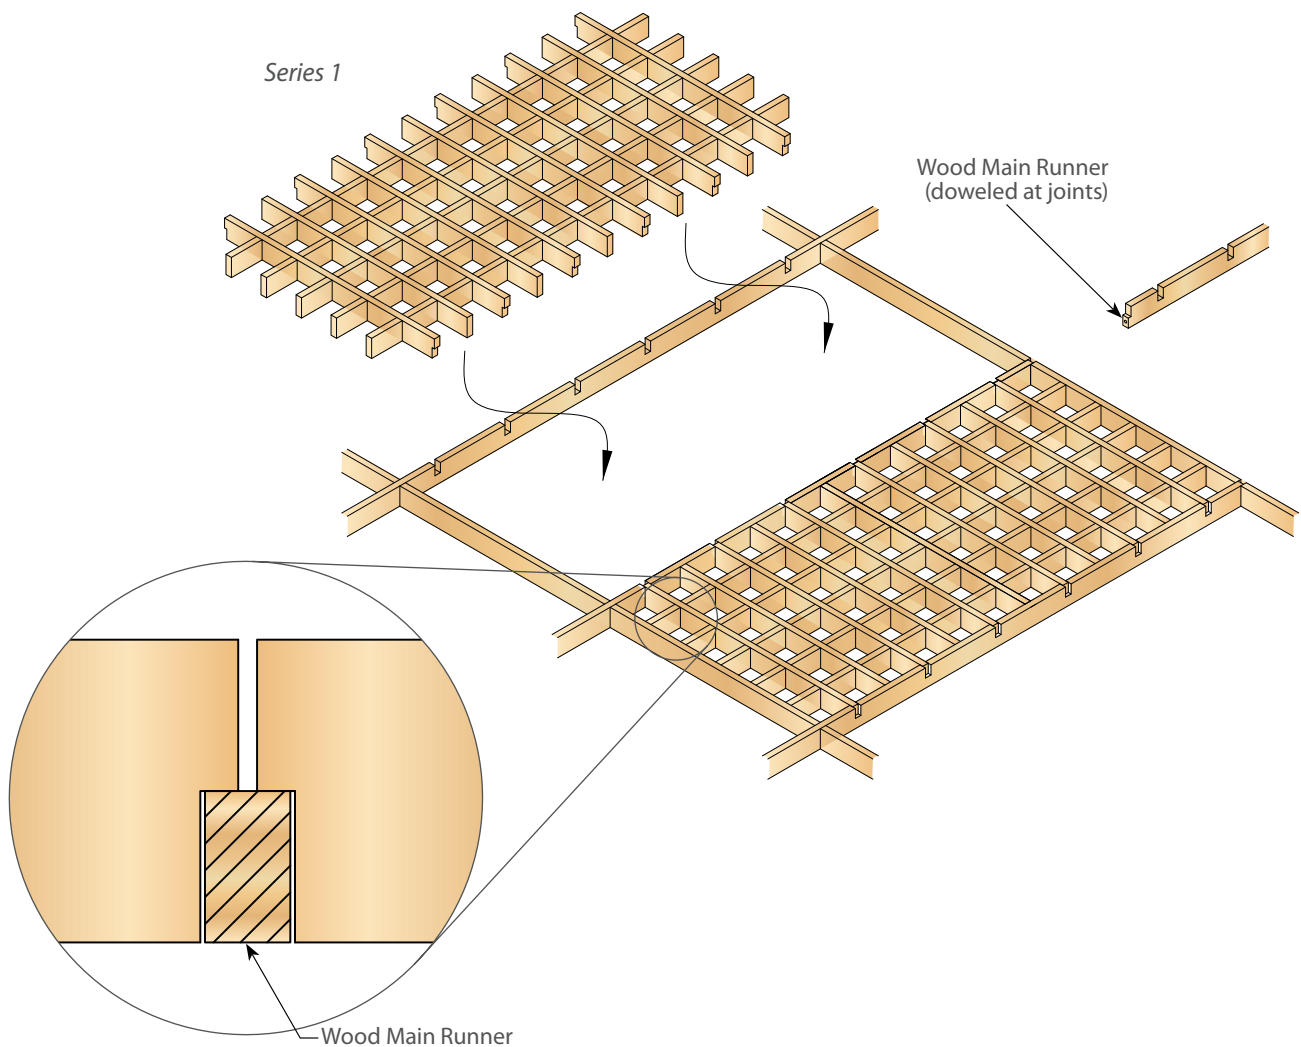

Cube-Continuous Series 1 & 2 — Specification Information

Product No.	Suspension Method	Depth (Below Grid)	Typical Strip Width	Cell Size	Depth	Panel Sizes
CC1-####	Wood Main Runners	Flush	1/16"	Up to 12"	Up to 3"	2'x2', 2'x4', 4'x4'
CC2-####	Wood Main Runners	Flush	3/8"	Up to 12"	Up to 3"	2'x2', 2'x4', 4'x4'

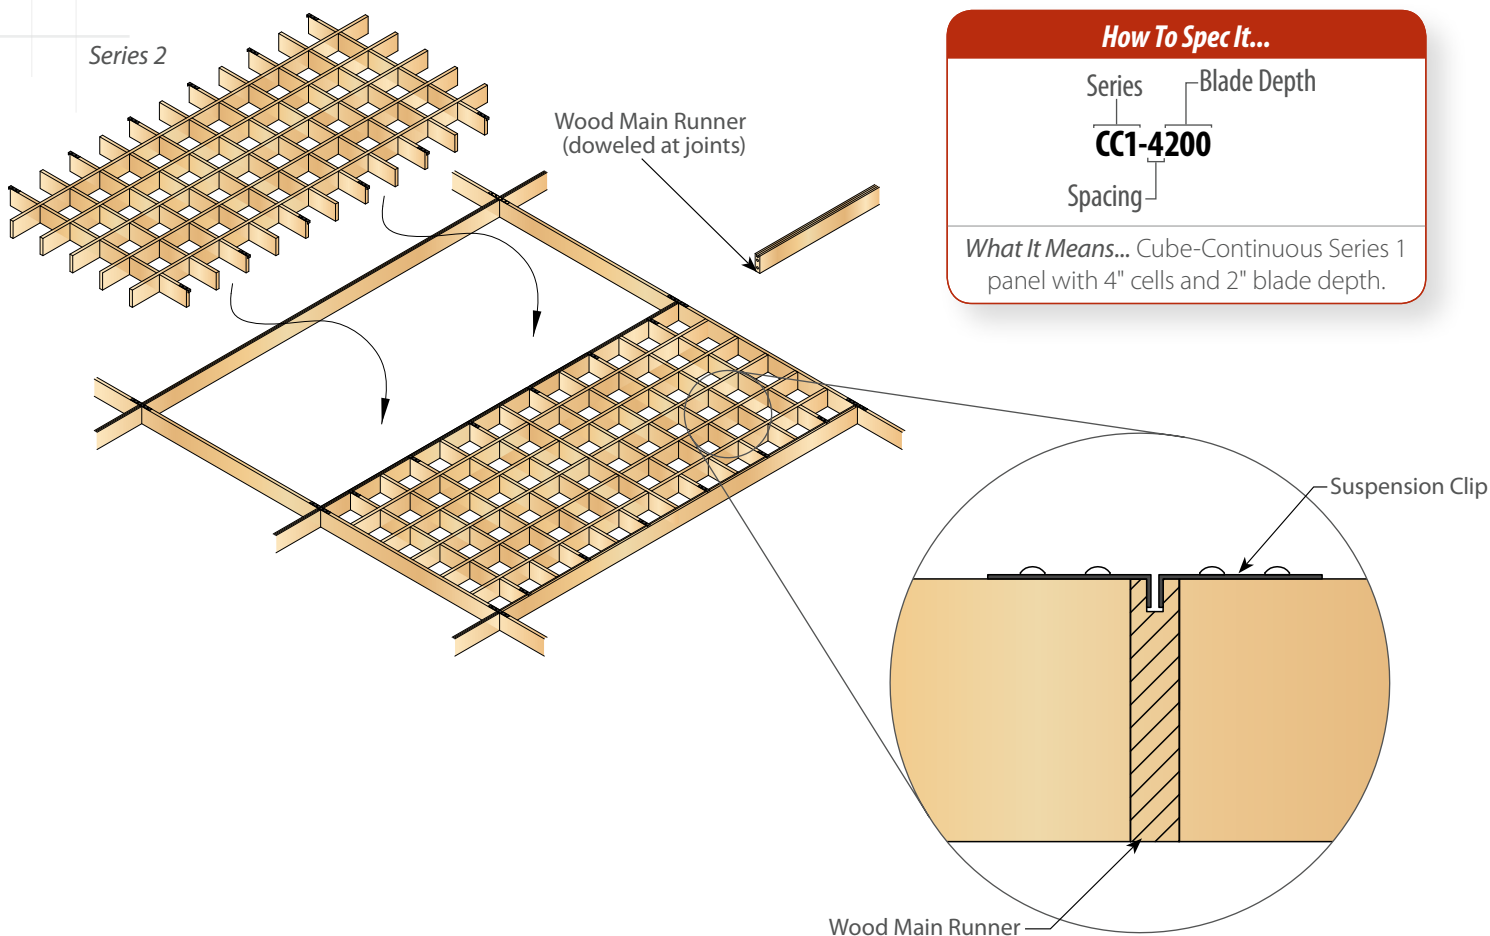

How To Spec It...

Series — Blade Depth
CC1-4200
 Spacing

What It Means... Cube-Continuous Series 1 panel with 4" cells and 2" blade depth.

LEED CREDIT

MR 4.1, MR 4.2, MR 7, EQ 4.4

WOOD SPECIES

Cube-Continuous panels are available in a large variety of wood veneers to meet design requirements.

FINISHES

Cube-Continuous panels can be finished in any of our standard finish options or custom finishes.

FIRE RATING

Our veneered products can be provided with a Class A rated core [ASTM-E84].

DELIVERY, STORAGE & HANDLING

Material must be stored and installed only in secured ambient environment (humidity range 25%–55%, temperature not to exceed 86°F). All windows, doors and wet-work must be complete before installation. Handle carefully to avoid damaging.

WARRANTY

All materials supplied by ACGI are guaranteed against manufacturing defects for one year. Wood stains and colorings can vary over time due to job site conditions and are therefore excluded from this warranty. The contractor shall warrant for one year all work from final acceptance of completed work.