



Modular Series 1 & 2





ACGI Cube Systems come in a variety of cell sizes, wood thicknesses and depths. Depending on project requirements, cube panels can be factory or field-cut to size. Fixture cut-outs can be factory cut, but are typically cut to field conditions. Modular Cube Systems are made to lay into HD T-Grid. Additionally, they can be placed into the grid or recessed to hang below the grid depending on the series selected. Instead of a continuous cube appearance, modular systems allow a distinct reveal between panels. ACGI offers two modular series:

Cube-Modular Series 1 [CM1] is a lay-in panel with perimeter sides.

Cube-Modular Series 2 [CM2] is a recessed panel below the 1 $\frac{5}{16}$ " grid.


Series 1

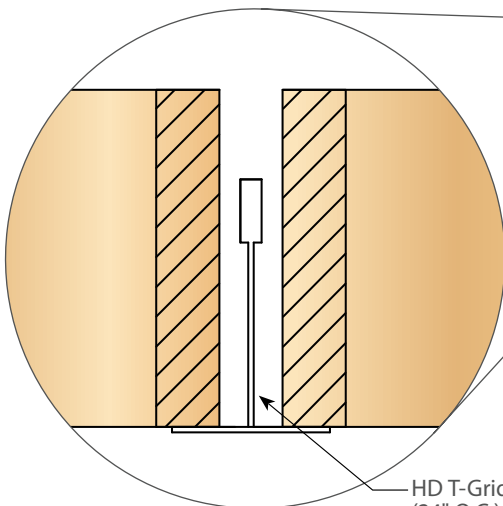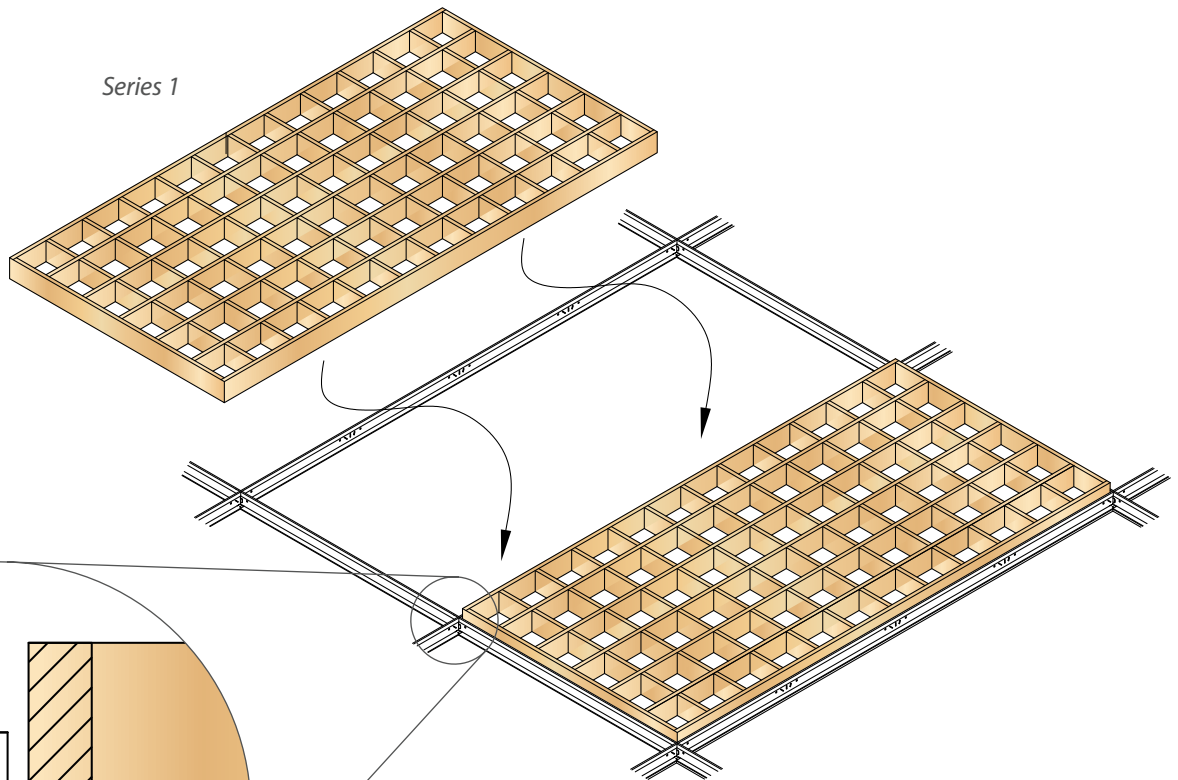

HD T-Grid Main Runner
(24" O.C.)

Cube-Modular Series 1 & 2 — Specification Information

Product No.	Suspension Method	Depth (Below Grid)	Typical Strip Width	Cell Size	Depth	Panel Sizes
CM1-####	HD T-Grid	Flush	1/16" or 3/8"	Up to 12"	Up to 3"	2'x2', 2'x4', 4'x4'
CM2-####	HD T-Grid	Up to 2 1/2"	1/16" or 3/8"	Up to 12"	Up to 3"	2'x2', 2'x4', 4'x4'

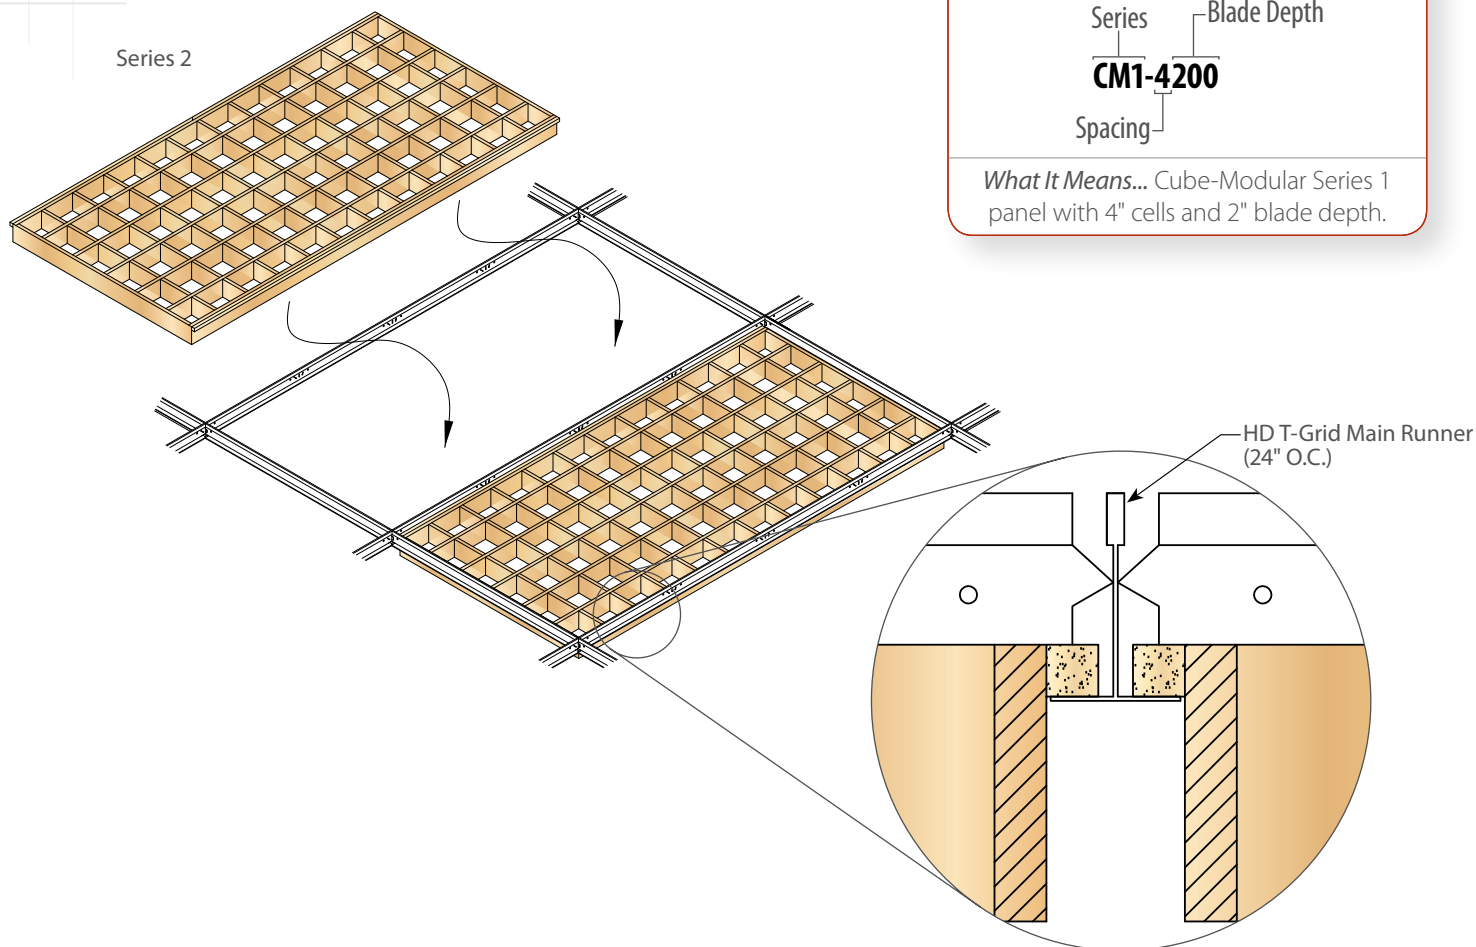

How To Spec It...

Series | Blade Depth
CM1-4200
 Spacing

What It Means... Cube-Modular Series 1 panel with 4" cells and 2" blade depth.

LEED CREDIT

MR 4.1, MR 4.2, MR 7, EQ 4.4

WOOD SPECIES

Cube-Modular panels are available in a large variety of wood veneers to meet design requirements.

FINISHES

Cube-Modular panels can be finished in any of our standard finish options or custom finishes.

FIRE RATING

Our veneered products can be provided with a Class A rated core [ASTM-E84].

DELIVERY, STORAGE & HANDLING

Material must be stored and installed only in secured ambient environment (humidity range 25%–55%, temperature not to exceed 86°F). All windows, doors and wet-work must be complete before installation. Handle carefully to avoid damaging.

WARRANTY

All materials supplied by ACGI are guaranteed against manufacturing defects for one year. Wood stains and colorings can vary over time due to job site conditions and are therefore excluded from this warranty. The contractor shall warrant for one year all work from final acceptance of completed work.