




Open Series 3



ACGI Linear Systems feature two basic series: Linear Open (LO) and Linear Closed (LC). Both systems are available in solid wood or wood veneer depending on plank size and design requirements. Typical veneer lengths are 8' and 10' with some reaching 12'. Solid wood lengths depend on species and lumber grade.

Linear Open Series 3 [LO3] is panelized to offer a faster and more economical installation. Panels are factory assembled using flat black wood backers. Standard panels are 1' or 2' wide and planks are $\frac{3}{4}$ " thick. Standard reveal is $\frac{3}{4}$ " (other reveal widths available upon request). The reveal allows the acoustical treatment to absorb soundwaves. Optional black fiber-felt can be factory installed. Ceiling applications are suspended from $\frac{15}{16}$ " HD T-Grid. Wall applications attach using sheathing or furring strips. The system is accessible, and optional suspension methods are available for ceilings requiring regular access.

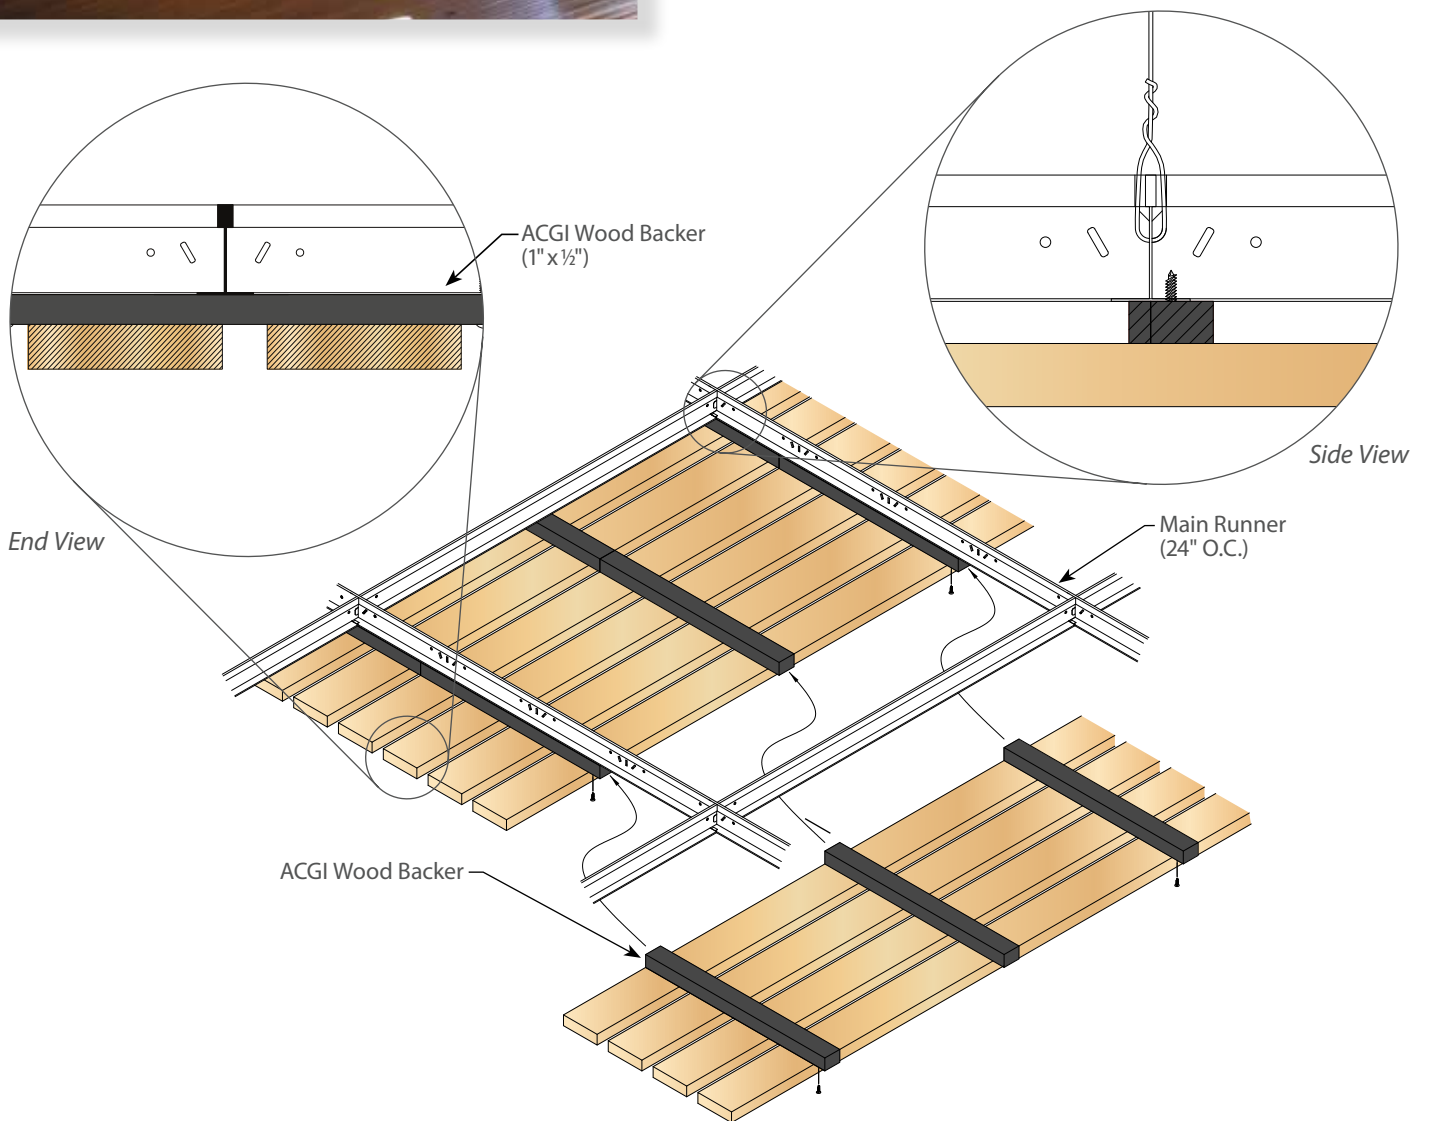

Linear Open Series 3 — Specification Information

| Product No. | Suspension | Reveal | Solid Wood Width | Veneer Width | Typical Thickness |
|-------------|-------------|--------------|------------------|--------------|-------------------|
| L03-####-C | Wood Backer | Typical 3/4" | Up to 5 1/4" | Up to 6" | 3/4" |

How To Spec It...


Series — Thickness ●
L03-375-C
 Width

What It Means... Linear Open Series 3,
 3 3/4" wide plank and 3/4" thick.


Thickness Reference

| | |
|-----|--------|
| A | 1/2" |
| B | 5/8" |
| ● C | 3/4" |
| D | 7/8" |
| E | 1" |
| F | 1 1/8" |
| G | 1 1/4" |
| H | 1 3/8" |
| I | 1 1/2" |
| J | 1 5/8" |
| K | 1 3/4" |
| L | 1 7/8" |
| M | 2" |
| N | 2 1/8" |
| O | 2 1/4" |
| P | 2 3/8" |

Back View

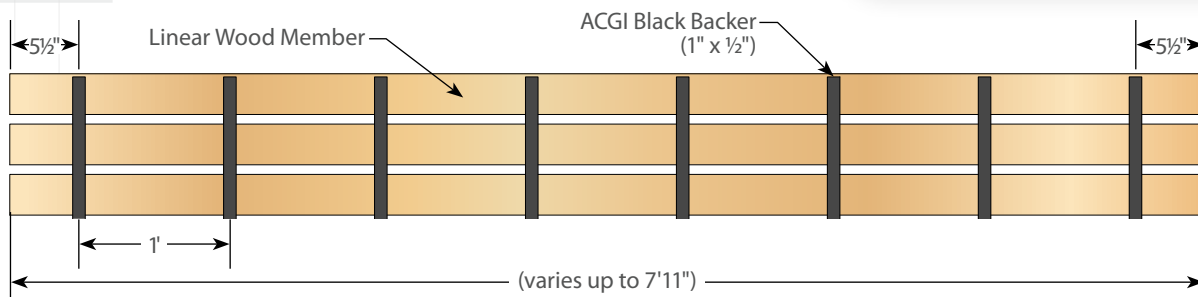

Perimeter Reveal

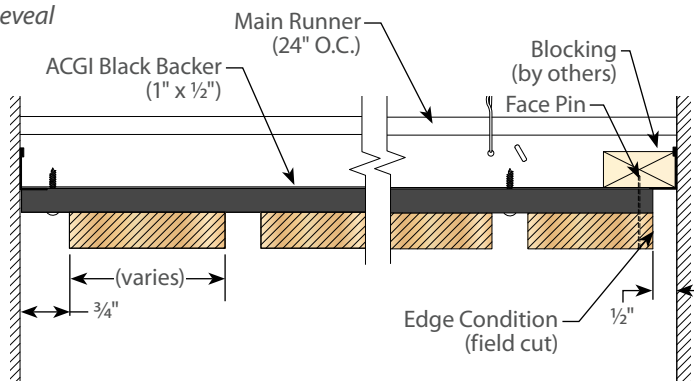

LEED CREDIT

MR 4.1, MR 4.2, MR 7, EQ 4.4

ACOUSTICS

NRC of 0.20 (E 400 mounting, panels only).
 NRC of 0.60 (E 400 mounting, 1" acoustical blanket).
 NRC of 0.70 (E 400 mounting, 2" acoustical blanket).

The Linear Open System allows sound waves to pass between the planks into the plenum. The NRC performance is controlled by installing 1" or 2" acoustic insulation. Most acoustic insulation blankets or mats have black coating to conceal the reveal. An optional non-woven black felt can be factory applied to create a visual barrier in the reveal.

WOOD SPECIES

Linear planks are available in a large variety of wood veneers to meet design requirements.

FINISHES

Linear planks can be finished in any of our standard finish options or custom finishes.

FIRE RATING

Our veneered products can be provided with a Class A rated core [ASTM-E84].

DELIVERY, STORAGE & HANDLING

Material must be stored and installed only in secured ambient environment (humidity range 25%–55%, temperature not to exceed 86°F). All windows, doors and wet-work must be complete before installation. Handle carefully to avoid damaging.

WARRANTY

All materials supplied by ACGI are guaranteed against manufacturing defects for one year. Wood stains and colorings can vary over time due to job site conditions and are therefore excluded from this warranty. The contractor shall warrant for one year all work from final acceptance of completed work.