



Photo by: Meadows Interiors

HAMPTON


BEAUTIFULLY CRAFTED WHERE EACH TILE TELLS A MESMERIZING STORY OF ARTISTRY AND TIMELESS ELEGANCE.

ambiente


EUROPEAN TILE DESIGN

400 East Pine Street, Suite 210
Seattle, WA 98122

206-524-2113
ambientetile.com



CLASSIC CRACKLE



The magic in the finely crafted Hampton Collection tiles begins with the crackle-glazed surface, which appears aged to perfection. The crackle effect gives each tile a delicate character and an individual mystique. With the Hampton Collection's versatility, you can tell a story in a wide range of decors, from traditional to transitional to minimalist.


HAMPTON Classic Crackle

Find out the product code simply by putting together the color and the item
Example: **ADHWH 836**

GLOSSY FINISH



WHITE **ADHWH**

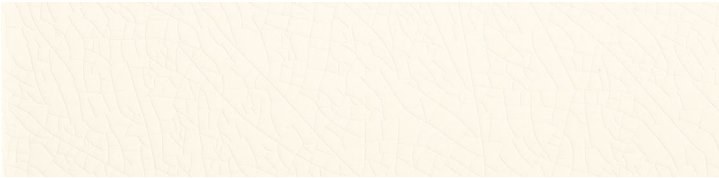

BONE **ADHBQ**



CADET GRAY **ADHCG**



STELLAR BLUE **ADHSB**

FIELD TILES

FLAT



836 3"x6"




882 2"x8"



848 4"x8"

TRIMS

FINISHING EDGES



FE




FE Corner

506 FE 0.4"x6"

508 FE 0.4"x8"

500 FE Corner

BEVELED




936 3"x6" Beveled




933 3"x3" Beveled
(Only comes with Double Glazed Edge)

TRIMS


BEVELED GLAZED EDGES



SGE



SGE



DGE

906 3"x6" Beveled SGE 3"

905 3"x6" Beveled SGE 6"

933 3"x3" Beveled DGE


DECORATIVE ACCESSORIES



207 1"x6" Bar Liner



220 0.7"x6" Stripe Liner



203 1"x6" Quarter Round




216 Beak

FINISHING TOUCHES

END CAPS

FRAME CORNERS




201 2"x6" Rail Molding



214



304




219 1.4"x6" Chair Molding



228



300




217 3"x6" Crown Molding



227



306




301 2"x8" Chair Molding



302



303



809 6"x6" Base Board
(Glazed Top Edge)



229

WHITE **ADHWH**



BONE **ADHBQ**



CADET GRAY **ADHCG**



STELLAR BLUE **ADHSB**





| FIELD TILES | | |
|--|-------------------------------|----------------|
| SIZE | SIZE SPECIFICATIONS | THICKNESS* |
| FLAT TILE | | |
| 3"x6" | 2.953"x5.906" (75mm x 150mm) | 0.256" (6.5mm) |
| 2"x8" | 1.969"x7.874" (50mm x 200mm) | 0.275" (7mm) |
| 4"x8" | 3.937"x7.874" (100mm x 200mm) | 0.295" (7.5mm) |
| BEVELED TILE | | |
| 3"x6" Beveled | 2.953"x5.906" (75mm x 150mm) | 0.303" (7.7mm) |
| DECORATIVE ACCESSORIES & FINISHING TOUCHES | | |
| Bar Liner 1"x6" | 0.984"x5.905" (25mm x 150mm) | 0.709" (18mm) |
| Stripe Liner 0.7"x6" | 0.709"x5.905" (18mm x 150mm) | 0.472" (12mm) |
| Quarter Round 1"x6" | 1.024"x5.905" (26mm x 150mm) | 0.354" (9mm) |
| Chair Molding 1.4"x6" | 1.457"x5.905" (37mm x 150mm) | 0.787" (20mm) |
| Chair Molding 2"x8" | 1.968"x7.874" (50mm x 200mm) | 0.827" (21mm) |
| Rail Molding 2"x6" | 2.007"x5.945" (51mm x 151mm) | 0.669" (17mm) |
| Crown Molding 3"x6" | 2.992"x5.905" (76mm x 150mm) | 0.748" (19mm) |
| Base Board (Glazed Top Edge) 6"x6" | 5.905"x5.905" (150mm x 150mm) | 0.591" (15mm) |

| APPLICATIONS | | |
|---|------------------------|---------------------|
| | SUITABLE RESIDENTIAL | SUITABLE COMMERCIAL |
| Bathroom Walls** | YES | YES |
| Shower Walls** | YES | YES |
| Kitchen Walls** | YES | YES |
| Countertops | NO | NO |
| Fireplace Surrounds** | YES | YES |
| Outdoor Cooking / Bar Spaces (Non Freeze-Thaw Climates)** | YES | YES |
| Pool Waterlines / Water Fountains | NO | NO |
| Floors | NO | NO |
| PERFORMANCE CHARACTERISTICS | | |
| | TEST METHOD ASTM / ISO | RESULT |
| Water Absorption | C-373 / 10545-3 | Pass |
| Breaking Strength | C-648 / 10545-4 | Pass |
| Stain Resistance*** | C-1378 / 10545-14 | Resistant |
| Chemical Resistance | C-650 / 10545-13 | Non Resistant |
| Facial Dimensions | C-499 / 10545-2 | Pass |
| Range of Thickness | C-499 / 10545-2 | Pass |
| Warpage | C-485 / 10545-2 | Pass |

| INSTALLATION | |
|----------------------------|-------------------------|
| GROUT JOINT RECOMMENDATION | SHADE VARIATION |
| 1/8" | V1 - Uniform Appearance |

| CLEANING RECOMMENDATIONS |
|---|
| Routine with a non-abrasive/non-acidic, mild and PH neutral cleaner |
| SEALING GUIDELINES |
| Solvent based penetrating sealer suitable for ceramic tiles |

| CHARACTERISTICS | |
|-----------------|---------|
| Glaze | Crackle |
| Surface Sheen | Glossy |
| Texture | Smooth |

*Thickness is understood as the highest point of the tile.

**Crackle tiles must be properly sealed. (See SEALING instructions in INSTALLATION & MAINTENANCE guidelines).

*** In order to accomplish this test, the tile must be properly sealed.

Due to the nature of our tile, a certain amount of variation in color, shading, surface and texture are to be expected.



CONTACT US

Corporate Headquarters
South East Distribution Center
9450 N.W.12th St.
Miami, FL. 33172
Office: 305-513-4633
Fax: 305-513-4634
customerservice@adexusa.com

West Coast Distribution Center
1745 N. St. Thomas Cir.
Orange, CA 92865
Office: 714-773-0197
Fax: 714-773-9352
customerservicewest@adexusa.com

North East Distribution Center
1000 Wall St. W.
Lyndhurst, NJ. 07071
Office: 201-355-8772
Fax: 201-636-2802
customerservicene@adexusa.com

www.adexusa.com

