



VTC-TNB8RMA4
Transcendent Series 8 MegaPixel
[4K] Gen. IV Advanced A.I.
Motorized IP Bullet Camera

QUICK START GUIDE



FEATURES:

- 1/2.8" 8.0 Megapixel [4K] CMOS Image Sensor
- NDA A Compliant
- Up to 30fps live view @ 8 MegaPixel (3840x2160)
- 2.8~12mm Motorized Varifocal Lens
- Matrix IR (up to 230' IR Range)
- True Wide Dynamic Range
- True Mechanical Day/Night function by ICR
- XD-DNR (3D & 2D-DNR) Noise Reduction
- Gen. IV Advanced Analytics: Regional Entrance / Exit Detection, Line Crossing, Target Counting [*All by Human / Motor Vehicle Classification*], Face Detection, Crowd Density, Abandoned / Missing Object, Abnormal Video
- H.265+ / H.265 / H.264+ / H.264 / MJPEG
- 1 Ch. Audio In + 1 Ch. Audio Out*
- 1 Ch. Alarm In + 1 Ch. Alarm Out, CVBS Out
- Remote Viewing via CMS, Internet Explorer, iOS & Android Apps
- ONVIF Compliant
- MicroSD Card Slot for Local Recording (256GB)
- IP67 Weather Resistance
- Wall Mount Included, Optional Junction Box VT-TJB01 Available
(see pg. 9 for additional mounting options)
- 12VDC & PoE (Power over Ethernet) Operation
- Available in Ivory or Charcoal Grey (VTC-TNB8RMA4B)
- 3-Year Warranty

*Please research local, state and federal laws regarding the implementation of audio surveillance.



PLEASE NOTE:

Complete User Guide, Software, Tools, and Updates are available online. Scan the QR Code or visit:
<http://www.vitekccvt.com/Downloads>

Components and Accessories



Camera



Quick start guide



4 tapping screws PA4×25

1 machine screw PWM3×5



CVBS&DC
IN cables



Hex Wrench




Drill template



Anchors ×4


Overview

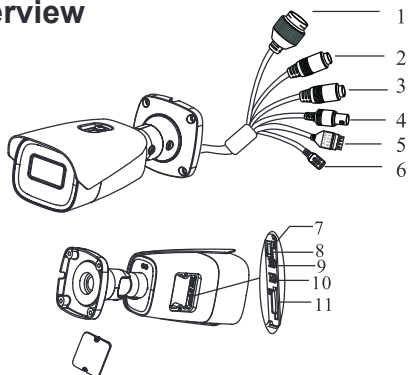

- | | |
|----|------------------------|
| 1 | Ethernet Connector |
| 2 | Audio Input (MIC) |
| 3 | Audio Output (HP) |
| 4 | CVBS Video Output |
| 5 | Alarm Input/Output |
| 6 | Power Connector |
| 7 | Micro SD Card Slot |
| 8 | DC IN & CVBS Interface |
| 9 | Zoom - |
| 10 | Zoom + |
| 11 | Reset |

Network Cable & Power Connections

First connect the Water Resistant Cap to an Ethernet patch cable, then connect the camera's ethernet adaptor. If not powering the camera with PoE, also connect the power Cable to an approved 12VDC power supply.

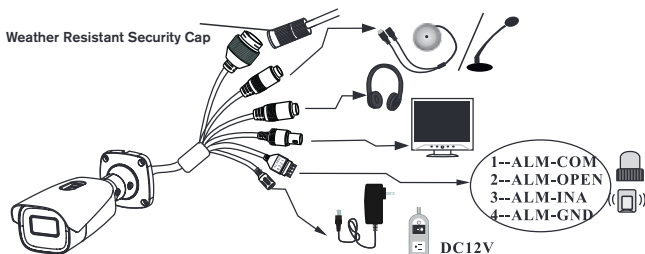

Connecting Alarm Input/Output


Alarm Input



Alarm Output



Weather Resistant Network Coupler

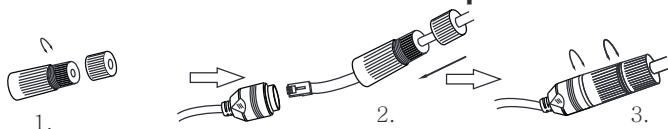


1. Loosen the nut from the Weather Resistant Network Coupler.
2. Run ethernet cable through coupler, then attach a RJ-45 connector.
3. Tighten the nut and coupler for a weather resistant seal.


Installation

Before beginning installation, make sure that the wall or ceiling is strong enough to withstand 3 times the weight of the camera. The mounting steps are as follows:

1. Attach the drill template to the place where you want to install the camera, then drill 4 screw holes and 1 cable hole (if you want to route the cables through the mounting base) according to the drill template

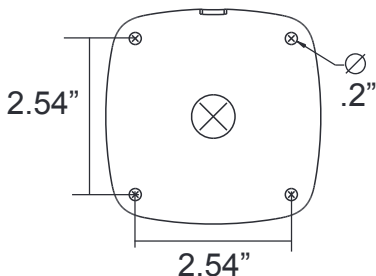


2. Route the cables and connect the power & video cables, use the rubber plug to fill the gap of the mounting base. then secure the mounting base to the ceiling or wall with screws.

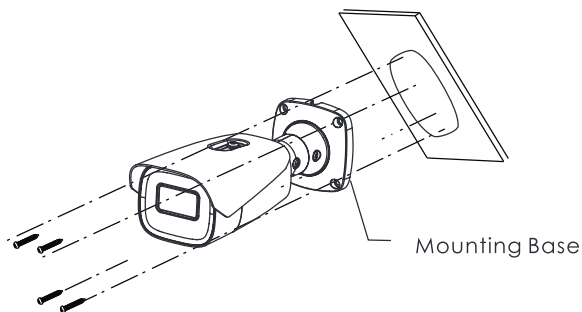


Installation


3. Loosen the mount lock to adjust the Pan and Tilt of the camera, then tighten the mount lock to secure the viewing angle adjustments.

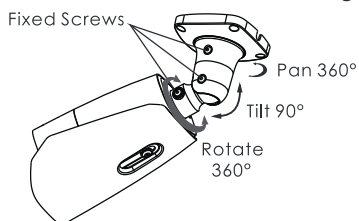


4. Open the cover of the camera as shown in the following figure, then insert a MicroSD card.

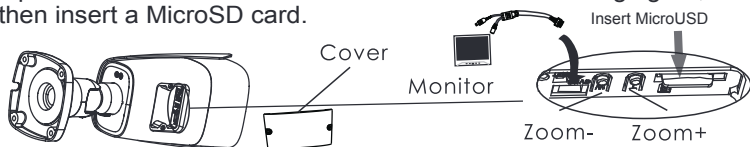

5. Re-install the cover back on the camera and close it with screws. Be sure to re-install the cover evenly.




LAN Configuration

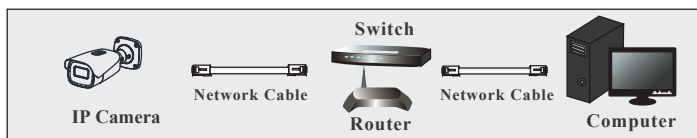

The camera can be accessed on the local network either using the IP-Tool or directly in a web browser.

Accessing the Camera Using the IP-Tool

1. Make sure the camera and PC are connected to the LAN.
2. Locate the IP-Tool installer at www.vitekccctv.com/Downloads/Software/Transcendent-IPTool_v2.0.2.zip, then install on the PC. Open the installed application.

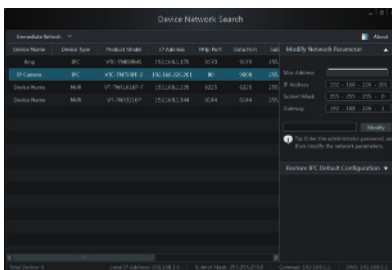

3. Modify the IP address. The default IP address is 192.168.226.201. Click the information of the camera listed in the above table to show the network information on the right side. Modify the IP address and gateway of the camera and make sure its network address is in the same local network segment as the computer's. Please modify the IP address of your device according to the practical situation.


For example, the IP address of your computer is 192.168.13.4. So the IP address of the camera shall be changed to 192.168.13.X. After modification, please input the password of the administrator and click "Modify" button to modify the setting.

The screenshot shows a network configuration form with the following fields:

- Mac Address: [Empty field]
- IP Address: [192 - 168 - 226 - 201]
- Subnet Mask: [255 - 255 - 255 - 0]
- Gateway: [192 - 168 - 226 - 1]
- [Empty field]
- [Modify button]

** Default admin password: "123456".

4. Double-click the IP address and then the system will pop up the web browser to connect IP-CAM. IE browser will download the Active X control. After downloading, a login window will pop up as shown below:

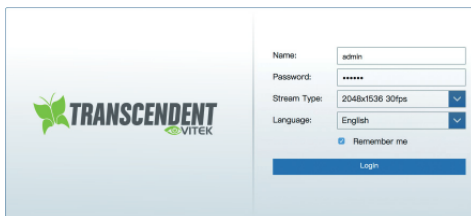

The image shows a login window for a Transcend Vitek IP camera. On the left is the Transcend Vitek logo. On the right is a form with the following fields: Name (text box with 'admin'), Password (password box with '123456'), Stream Type (dropdown menu with '2048x1536 30fps'), and Language (dropdown menu with 'English'). There is a 'Remember me' checkbox and a 'Login' button at the bottom.

Input the user name and password to log in.
Default user name: admin / Default password: 123456.

Directly Access Through a Web Browser

The default network settings are as shown below:

IP address: 192.168.226.201 HTTP: 80


Subnet Mask: 255.255.255.0 Data Port: 9008

Gateway: 192.168.226.1

You may use the above default settings when you log in the camera for the first time.

1. Manually set the IP address of the PC. The network segment should be the same as the default settings of IP-CAM. Open the network and share center. Click “Local Area Connection” to pop up the following window.

Select “Properties” and then select Internet protocol according to the actual situation (for example: IPV4). Next, click “Properties” button to set the network of the PC.

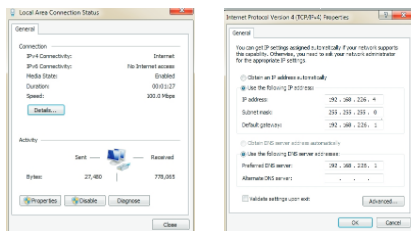

2. Open the IE Browser and input the default address of IP-CAM and confirm. The IE browser will download Active X control.
3. After downloading Active X control, the login dialog box will pop up.
4. Input the default username and password and then enter to view.

WAN Configuration

Access the camera by the router or virtual server for example.

1. Make sure the camera is connected to the LAN; Then log into the camera via LAN and go to System Config→Network Config→Port menu to set up the port number.
2. Enter System Config→Network Config→IP Address menu to modify the IP address.

Port	Server	DDNS	SNMP	802.1X	RTSP	UPn
HTTP Port	80					
HTTPS Port	443					
Data Port	9008					
RTSP Port	554					

[Save](#)

3. Go to the router's management interface through IE browser to forward the IP address and port of IP-CAM in the "Virtual Server".

Port Range					
Application	Start	End	Protocol	IP Address	Enable
1	9008	to 9008	Both	192.168.6.6	☒
2	80	to 81	Both	192.168.6.6	☒
3	10000	to 10001	Both	192.168.6.166	☐
4	21000	to 21001	Both	192.168.6.156	☐
5	7777	to 7778	Both	192.168.6.206	☐
6	1029	to 1030	Both	192.168.6.207	☐


4. Open the web browser and input its WAN IP and HTTP port to access the IP-CAM.
5. For additional setup, features and functions, please scan the QR code on the front page of this quick guide and download the complete manual.

VTC-TNB8RMA4 Detailed Specifications


Image Sensor	1/2.8" 8.0 Megapixel [4K] CMOS Image Sensor
Image Size	8 MegaPixel (3840 × 2160)
Resolution	8MP(3840 × 2160), 6MP(3072 × 2048), 5MP(2592 × 1944), 4MP(2592 × 1520), 3MP(2304 × 1296), 1080P(1920 × 1080), 720P(1280 × 720), D1, CIF, 480 × 240
Min. Illumination	0.01 lux @F1.2, AGC ON; 0 lux with IR, 0.015 lux @ F1.4, AGC ON; 0 lux with IR
Lens	Motorized 2.8-12mm
Day / Night	True Day/Night by ICR
IR LEDs / IR Distance	4 Matrix / 230' (Smart IR)
Video Compression	H.265+ / H.265 / H.264+ / H.264 / MJPEG
Audio Compression	G.711A / G.711U
Main-Stream	1 ~ 30fps: 8MP, 6MP, 5MP, 4MP, 3MP, 1080P, 720P, D1, CIF, 480x240
Bit Rate / Type	64Kbps ~ 12Mbps / VBR, CBR
Wide Dynamic Range (WDR)	120dB Super WDR
Digital Noise Reduction (DNR)	XD-DNR (2D-DNR & 3D-DNR)
Image Setting	Saturation, Brightness, Contrast, WDR, Noise Reduction
Gen. IV Advanced Analytics	Intrusion Det., Line Crossing, Target Counting (All by Human/Motor Vehicle Classification), Face Det., Video Blur, Video Color Cast Det.
Smart Alarm	Motion Alarm / Sensor Alarm
Region of Interest (ROI)	Each ROI to be Configured Separately
Network	RJ45
Audio	1 Ch. Audio In + 1 Ch. Audio Out (2-Way Audio)*
Video Out	1 Ch. CVBS Video Out
Alarm	1 Ch. Alarm In + 1 Ch. Alarm Out
Local Storage	MicroSD Card Slot (Up to 256GB)
Remote Viewing	CMS / Web Browser / Mobile (iOS/Android)
Supported Browsers	Microsoft Internet Explorer
Connection Protocol	ONVIF
Weather Protection	IP67 Weather Rating
Power Input	12VDC / PoE
Power Consumption 12VDC / PoE	350mA (LEDs Off), 600mA (LEDs On) / < 9.5W
NDAA Compliant	YES
Working Environment	-22° ~ 140° / < 95% Humidity
Weight, Dimensions L × W × H	36.64 oz. / 2.29 lbs. / 1.04kg, 11.00" × 3.95" × 3.54" × (279.5mm × 100.3mm × 89.9mm)

**Please research local, state and federal laws regarding the implementation of audio surveillance.*


VT-TJB01
Optional Junction Box



VT-TPLMT
Transcend Universal
Pole Mount (reqs. VT-TJB01)



VT-TCNMT
Transcend Universal
Corner Mount (reqs. VT-TJB01)





**OPTIONAL ACCESSORIES AND
RELATED PRODUCTS FOR
NDAA COMPLIANT
TRANSCENDENT IP CAMERAS**

ALSO CONSIDER THESE OTHER GREAT TRANSCENDENT

***VITEK Network Video Recorders Supporting up to
12MP Resolution & Real Time Video!***




***Pair with VITEK Transcendent Series NDAA Compliant
Network Recorders: VT-TNR818PFN, VT-TNR1646PFN,
and VT-TNR3216PFN with Built-in PoE and Gen IV.
Advanced A.I. including Face Detection, Target
Counting, and Other Fully Programmable Analytics.***



Also Consider Vitek NDAA Compliant Wireless Access Points to Reduce Costly Cable Installation!

VT-WAP1150 and VT-WAP2150 High Speed 5.8GHz DIP AP / CPE Wireless Bridge w/ 8MB Storage, 64MB RAM, 150Mbps Transmission, and Point-to-Multi-Point (P2MP) Topology

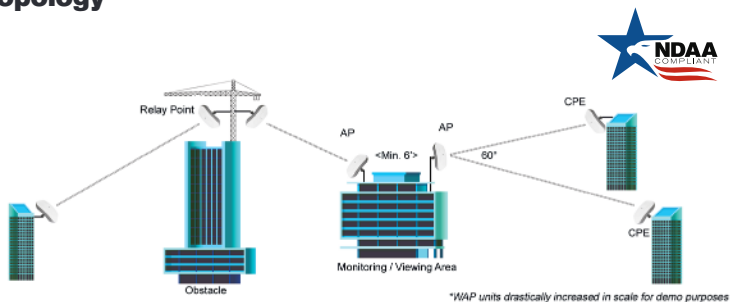

With high speed transmission of 150Mbps and a wireless range of **3000ft.** (VT-WAP1150) and **1.25 miles** (VT-WAP2150) these products eliminate the need for expensive and troublesome long-distance cables in areas where CCTV monitoring and rigorous surveillance take place. These small, lightweight and durable units are easy to install and easy to use with an innovative and straightforward 10-button plug-and-play dip switch that facilitates the creation of a robust wireless network without a computer. Set-up can be simply configured for point-to-point or point-to-multipoint topology depending on the application, with up to 128 IP group configurations!



LIMITED PRODUCT WARRANTY

VITEK products carry a three (3) year limited warranty. VITEK warrants to the purchaser that products manufactured by VITEK are free of any rightful claim of infringement or the like, and when used in the manner intended, will be free of defects in materials and workmanship for a period of three (3) years, or as otherwise stated above, from the date of purchase by the end user. This warranty is nontransferable and extends only to the original buyer or end user customer of a VITEK Authorized Reseller.

The product must have been used only for its intended purpose, and not been subjected to damage by misuse, willful or accidental damage, caused by excessive voltage or lightning.

The product must not have been tampered with in any way or the guarantee will be considered null and void.

This guarantee does not affect your statutory rights.

Contact your local VITEK Reseller should servicing become necessary.

VITEK makes no warranty or guarantee whatsoever with respect to products sold or purchased through unauthorized sales channels. Warranty support is available only if product is purchased through a VITEK Authorized Reseller.



28492 CONSTELLATION ROAD VALENCIA, CA 91355
WWW.VITEKCCTV.COM

Version 2.0
Jan. 2022