

CP10.241-R1 CP10.241-R2  
 CP10.241-R2-C1



**REDUNDANCY  
 POWER SUPPLY**

1AC 24V 240W

- AC 100-240V Wide-range input
- Width only 39mm
- Built-in Decoupling MOSFET for 1+1 and N+1 Redundancy
- Efficiency up to 94.7%
- 20% Output Power Reserves
- Safe Hiccup<sup>PLUS</sup> Overload Mode
- Easy Fuse Breaking - 3 times nominal current for 12ms
- Active Power Factor Correction (PFC)
- Minimal Inrush Current Surge
- Full Power Between -25°C and +60°C
- DC-OK Relay Contact
- Current Sharing Feature Included
- 3 Year Warranty

**GENERAL DESCRIPTION**

The Dimension CP-Series are cost optimized power supplies without compromising quality, reliability and performance. The most outstanding features of the CP10.241-R1/ R2 units are the high efficiency, electronic inrush current limitation, active PFC, wide operational temperature range and the extraordinary small size. The units include a decoupling MOSFET for building 1+1 or N+1 redundant power supply systems. These redundancy power supplies come with two connection terminal options; spring-clamp terminals or plug connector terminals which allows replacement on an active application.

With high immunity to transients and power surges, low electromagnetic emission, a DC-OK signal contact for remote monitoring, and a large international approval package, makes this unit suitable for nearly every application.

High immunity to transients and power surges as well as low electromagnetic emission, a DC-OK relay contact and a large international approval package make this unit suitable for nearly every situation.

**SHORT-FORM DATA**

|                   |                                |                     |
|-------------------|--------------------------------|---------------------|
| Output voltage    | DC 24V                         | 0%/+6%              |
|                   | Factory setting 24.1V          |                     |
| Output current    | 12A                            | Below +45°C ambient |
|                   | 10A                            | At +60°C ambient    |
|                   | 7.5A                           | At +70°C ambient    |
|                   | Derate between +45°C and +70°C |                     |
| Input voltage AC  | AC 100-240V                    | -15% / +10%         |
| Mains frequency   | 50-60Hz                        | ±6%                 |
| Input current AC  | 2.17 / 1.14A                   | At 120 / 230Vac     |
| Power factor      | 0.99 / 0.97                    | At 120 / 230Vac     |
| Input voltage DC  | DC 110-150V                    | ±20%                |
| Input current DC  | 2.35A                          | At 110Vdc           |
| AC Inrush current | 6 / 9A <sub>peak</sub>         | At 120 / 230Vac     |
| Efficiency        | 93 / 94.7%                     | At 120 / 230Vac     |
| Power Losses      | 18.1 / 13.4W                   | At 120 / 230Vac     |
| Hold-up time      | 37 / 37ms                      | At 120 / 230Vac     |
| Temperature range | -25°C to +70°C                 |                     |
| Size (w x h x d)  | 39x124x117mm                   | Without DIN rail    |
| Weight            | 600g / 1.32lb                  |                     |

**ORDER NUMBERS**

|                      |                                                |
|----------------------|------------------------------------------------|
| <b>Description:</b>  | Power supply<br>CP10.241-Rx-xx                 |
| <b>Order Number:</b> |                                                |
| CP10.241-R1          | Quick-connect spring-clamp terminals           |
| CP10.241-R2          | Hot swappable plug connectors (preferred item) |
| CP10.241-R2-C1       | Conformal coated pc-boards                     |
| <b>Accessories:</b>  |                                                |
| ZM10.WALL            | Wall/panel mount bracket                       |
| ZM12.SIDE            | Side mount bracket                             |

**MAIN APPROVALS**

For details or a complete approval list, see chapter 21.



## Index

|    |                                                 |    |       |                                          |    |
|----|-------------------------------------------------|----|-------|------------------------------------------|----|
| 1  | Intended Use.....                               | 4  | 19    | Safety Features.....                     | 20 |
| 2  | Installation Instructions.....                  | 4  | 20    | Dielectric Strength.....                 | 21 |
| 3  | AC-Input.....                                   | 6  | 21    | Approvals and Fulfilled Standards.....   | 22 |
| 4  | DC-Input.....                                   | 7  | 22    | Regulatory Compliance.....               | 23 |
| 5  | Input Inrush Current.....                       | 8  | 23    | Physical Dimensions And Weight.....      | 24 |
| 6  | Output.....                                     | 9  | 24    | Accessories.....                         | 25 |
| 7  | Hold-up Time.....                               | 10 | 24.1  | ZM10.Wall - Wall/Panel Mount Bracket..   | 25 |
| 8  | DC-OK Relay Contact.....                        | 11 | 24.2  | ZM12.Side - Side Mounting Bracket.....   | 26 |
| 9  | Efficiency and Power Losses.....                | 12 | 25    | Application Notes.....                   | 27 |
| 10 | Lifetime Expectancy.....                        | 13 | 25.1  | Peak Current Capability.....             | 27 |
| 11 | MTBF.....                                       | 13 | 25.2  | Adjusting the output voltage.....        | 28 |
| 12 | Functional Diagram.....                         | 14 | 25.3  | Output Circuit Breakers.....             | 29 |
| 13 | Terminals And Wiring.....                       | 15 | 25.4  | Parallel Use to Increase Output Power... | 30 |
| 14 | Replacing units while the system is running.... | 16 | 25.5  | Parallel Use for Redundancy.....         | 30 |
| 15 | Front Side And User Elements.....               | 17 | 25.6  | Series Operation.....                    | 31 |
| 16 | EMC.....                                        | 18 | 25.7  | Charging of Batteries.....               | 31 |
| 17 | Environment.....                                | 19 | 25.8  | Two Phase Operation.....                 | 31 |
| 18 | Protection Features.....                        | 20 | 25.9  | Use in a Tightly Sealed Enclosure.....   | 32 |
|    |                                                 |    | 25.10 | Mounting Orientations.....               | 33 |

The information given in this document is correct to the best of our knowledge and experience at the time of publication. If not expressly agreed otherwise, this information does not represent a warranty in the legal sense of the word. As the state of our knowledge and experience is constantly changing, the information in this data sheet is subject to revision. We therefore kindly ask you to always use the latest issue of this document (available under [www.pulspower.com](http://www.pulspower.com)).

No part of this document may be reproduced or utilized in any form without our prior permission in writing.

Packaging and packaging aids can and should always be recycled. The product itself may not be disposed of as domestic refuse.

## TERMINOLOGY AND ABBREVIATIONS

|                                          |                                                                                                                                                                                                                                                                                                                                                                    |
|------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>PE and <math>\oplus</math> Symbol</b> | PE is the abbreviation for <b>Protective Earth</b> and has the same meaning as the symbol $\oplus$ .                                                                                                                                                                                                                                                               |
| <b>Earth, Ground</b>                     | This document uses the term "earth" which is the same as the U.S. term "ground".                                                                                                                                                                                                                                                                                   |
| <b>T.b.d.</b>                            | To be defined, value or description will follow later.                                                                                                                                                                                                                                                                                                             |
| <b>AC 230V</b>                           | A figure displayed with the AC or DC before the value represents a nominal voltage with standard tolerances (usually $\pm 15\%$ ) included.<br>E.g.: DC 12V describes a 12V battery disregarding whether it is full (13.7V) or flat (10V)                                                                                                                          |
| <b>230Vac</b>                            | A figure with the unit (Vac) at the end is a momentary figure without any additional tolerances included.                                                                                                                                                                                                                                                          |
| <b>50Hz vs. 60Hz</b>                     | As long as not otherwise stated, AC 230V parameters are valid at 50Hz mains frequency.                                                                                                                                                                                                                                                                             |
| <b>may</b>                               | A key word indicating flexibility of choice with no implied preference.                                                                                                                                                                                                                                                                                            |
| <b>shall</b>                             | A key word indicating a mandatory requirement.                                                                                                                                                                                                                                                                                                                     |
| <b>should</b>                            | A key word indicating flexibility of choice with a strongly preferred implementation.                                                                                                                                                                                                                                                                              |
| <b>1+1 Redundancy</b>                    | Use of two identical power supplies in parallel to provide continued operation following most failures in a single power supply. The two power supply outputs should be isolated from each other by utilizing diodes or other switching arrangements. E.g. two 10A power supplies are needed to achieve a 10A redundant system.                                    |
| <b>N+1 Redundancy</b>                    | Use of three or more identical power supplies in parallel to provide continued operation following most failures in a single power supply. All power supply outputs should be isolated from each other by utilizing diodes or other switching arrangements. E.g.: To achieve a 40A redundant system, five 10A power supplies are needed in a N+1 redundant system. |

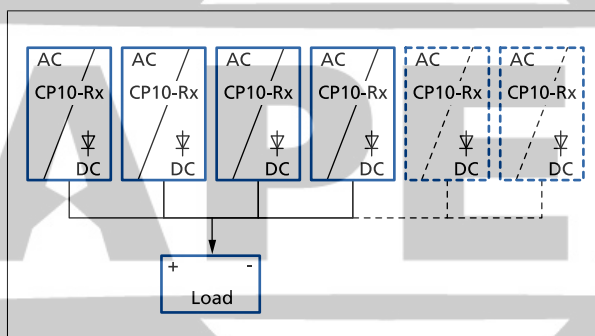


Fig. 1: N+1 Redundancy

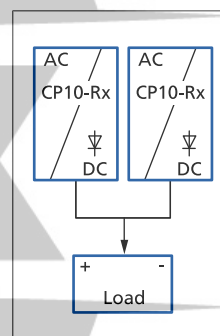


Fig. 2: 1+1 Redundancy

## 1. Intended Use

This device is designed for installation in an enclosure and is intended for commercial use, such as in industrial control, process control, monitoring, measurement, Audio/Video, information or communication equipment or the like.

Do not use this device in equipment, where malfunctioning may cause severe personal injury or threaten human life without additional appropriate safety devices, that are suited for the application. If this device is used in a manner outside of its specification, the protection provided by the device may be impaired.

## 2. Installation Instructions

**⚠ DANGER** Risk of electrical shock, fire, personal injury or death.

- Turn power off before working on the device. Protect against inadvertent re-powering.
- Do not open, modify or repair the device.
- Use caution to prevent any foreign objects from entering the housing.
- Do not use in wet locations or in areas where moisture or condensation can be expected.
- Do not touch during power-on, and immediately after power-off. Hot surfaces may cause burns.

**! NOTE**

**Notes for use in hazardous location areas:**

The device is suitable for use in Class I Division 2 Groups A, B, C, D locations and for use in Group II Category 3 (Zone 2) environments.

Classification: ATEX: EPS 15 ATEX 1 101 X, II 3G EX ec nC IIC T4 Gc / IECEx EPS 15.0079X

**⚠ CAUTION** WARNING EXPLOSION HAZARDS!

- Do not use with DC input voltages.
- Use only in standard vertical mounting orientation with the input terminals on bottom of the unit. Substitution of components may impair suitability for this environment.
- Do not disconnect the device or operate the voltage adjustment unless power has been switched off or the area is known to be non-hazardous.
- A suitable enclosure must be provided for the end product, which has a minimum protection of IP54 and fulfils the requirements of the EN 60079-0.

This device may only be installed and put into operation by qualified personnel. This device does not contain serviceable parts. The tripping of an internal fuse is caused by an internal defect. If damage or malfunction should occur during installation or operation, immediately turn power off and send the device to the factory for inspection.

Install the device in an enclosure providing protection against electrical, mechanical and fire hazards. Install the device onto a DIN rail according to EN 60715 with the input terminals on the bottom of the device. Other mounting orientations require a reduction in output current.

Make sure that the wiring is correct by following all local and national codes. Use appropriate copper cables that are designed for a minimum operating temperature of 60°C for ambient temperatures up to +45°C, 75°C for ambient temperatures up to +60°C and 90°C for ambient temperatures up to +70°C. Ensure that all strands of a stranded wire enter the terminal connection. Unused screw terminals should be securely tightened.

The device is designed for pollution degree 2 areas in controlled environments. No condensation or frost is allowed.

The enclosure of the device provides a degree of protection of IP20. The enclosure does not provide protection against spilled liquids. The isolation of the device is designed to withstand impulse voltages of overvoltage category III according to IEC 60664-1.

The device is designed as "Class of Protection I" equipment according to IEC 61140. Do not use without a proper PE (Protective Earth) connection. The device is suitable to be supplied from TN, TT or IT mains networks. The continuous voltage between the input terminal and the PE potential must not exceed 300Vac.

The input can also be powered from batteries or similar DC sources. The continuous voltage between the supply voltage and the PE/ground potential must not exceed 375Vdc. A disconnecting means shall be provided for the input of the device.

The device is designed for convection cooling and does not require an external fan. Do not obstruct airflow and do not cover ventilation grid! The device is designed for altitudes up to 5000m (16400ft). Above 2000m (6560ft) a reduction in output current and over voltage category is required. Keep the following minimum installation clearances: 40mm on top, 20mm on the bottom, 5mm left and right side. Increase the 5mm to 15mm in case the adjacent device is a heat source. When the device is permanently loaded with less than 50%, the 5mm can be reduced to zero.

The device is designed, tested and approved for branch circuits up to 32A (IEC) and 30A (UL) (for CP10.241-R1) or 20A (for CP10.241-R2 and CP10.241-R2-C1) and without additional protection device. If an external fuse is utilized, do not use circuit breakers smaller than 6A B- or C-Characteristic to avoid a nuisance tripping of the circuit breaker. The maximum surrounding air temperature is +70°C (+158°F). The operational temperature is the same as the ambient or surrounding air temperature and is defined 2cm below the device. The device is designed to operate in areas between 5% and 95% relative humidity. Do not unplug the connectors more often than 20 times in total.



### 3. AC-Input

The device is suitable to be supplied from TN-, TT- or IT-mains networks with AC voltage. For suitable DC supply voltages see chapter 4.

|                                 |                                   |             |                                      |         |                                                                      |
|---------------------------------|-----------------------------------|-------------|--------------------------------------|---------|----------------------------------------------------------------------|
| AC input                        | nom.                              | AC 100-240V |                                      |         |                                                                      |
| AC input range                  |                                   | 85-264Vac   | Continuous operation                 |         |                                                                      |
|                                 |                                   | 264-300Vac  | Occasionally for maximal 500ms       |         |                                                                      |
| Allowed voltage L or N to earth | max.                              | 300Vac      | Continuous, according to IEC 60664-1 |         |                                                                      |
| Input frequency                 | nom.                              | 50-60Hz     | ±6%                                  |         |                                                                      |
| Turn-on voltage                 | typ.                              | 80Vac       | Steady-state value, see Fig. X       |         |                                                                      |
| Shut-down voltage               | typ.                              | 70Vac       | Steady-state value, see Fig. X       |         |                                                                      |
|                                 | typ.                              | 55Vac       | Dynamic value for max. 250ms         |         |                                                                      |
| External input protection       | See recommendations in chapter 2. |             |                                      |         |                                                                      |
|                                 |                                   | AC 100V     | AC 120V                              | AC 230V |                                                                      |
| Input current                   | typ.                              | 2.63A       | 2.17A                                | 1.14A   | At 24V, 10A, see Fig. 3-3                                            |
| Power factor *)                 | typ.                              | 0.99        | 0.99                                 | 0.97    | At 24V, 10A, see Fig. 3-4                                            |
| Crest factor **)                | typ.                              | 1.5         | 1.5                                  | 1.65    | At 24V, 10A                                                          |
| Start-up delay                  | typ.                              | 300ms       | 290ms                                | 240ms   | See Fig. 3-2                                                         |
| Rise time                       | typ.                              | 30ms        | 30ms                                 | 30ms    | At 24V, 10A const. current load, 0mF load capacitance, see Fig. 3-2  |
|                                 | typ.                              | 75ms        | 75ms                                 | 75ms    | At 24V, 10A const. current load, 20mF load capacitance, see Fig. 3-2 |
| Turn-on overshoot               | max.                              | 200mV       | 200mV                                | 200mV   | See Fig. 3-2                                                         |

\*) The power factor is the ratio of the true (or real) power to the apparent power in an AC circuit.

\*\*) The crest factor is the mathematical ratio of the peak value to RMS value of the input current waveform.

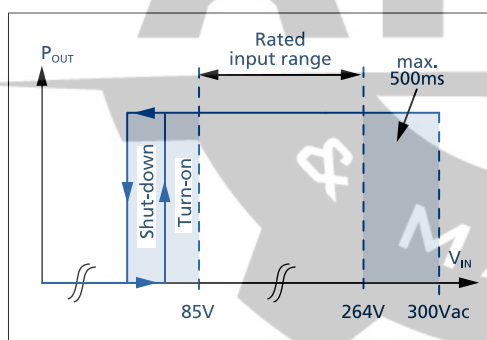


Fig. 3-1: Input voltage range

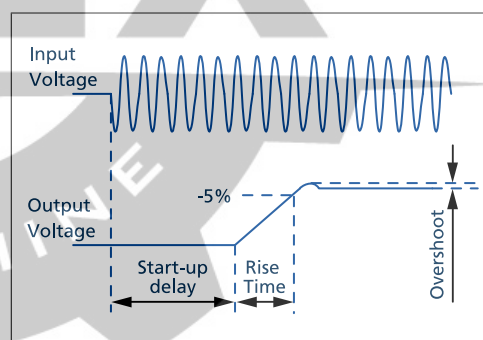


Fig. 3-2: Turn-on behavior, definitions

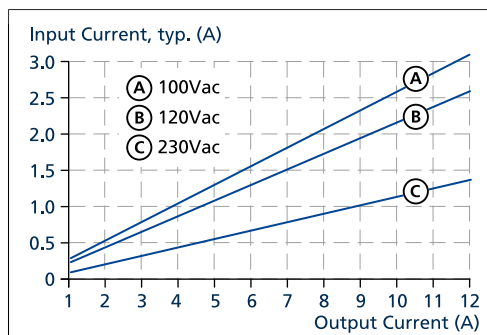


Fig. 3-3: Input current vs. output current at 24V output voltage

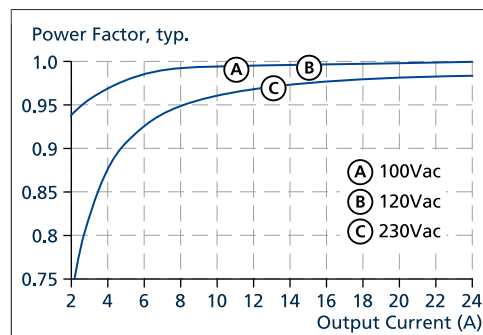


Fig. 3-4: Power factor vs. output current at 24V output voltage

## 4. DC-Input

|                                           |      |             |                                      |
|-------------------------------------------|------|-------------|--------------------------------------|
| DC input                                  | nom. | DC 110-150V | ±20%                                 |
| DC input range                            |      | 88-180Vdc   | Continuous operation                 |
| DC input current                          | typ. | 2.35A       | At 110Vdc, 24V, 10A                  |
| Allowed voltage (+) or (-) input to earth | max. | 360Vdc      | Continuous, according to IEC 60664-1 |
| Turn-on voltage                           | typ. | 80Vdc       | Steady state value                   |
| Shut-down voltage                         | typ. | 70Vdc       | Steady state value                   |
|                                           | typ. | 55Vdc       | Dynamic value for max. 250ms         |

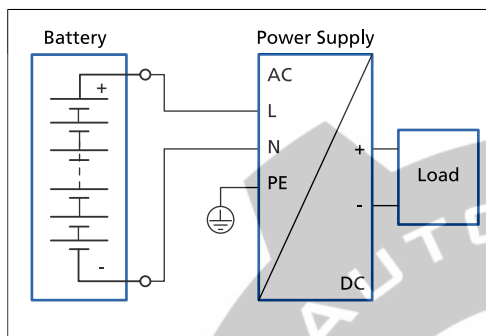


Fig. 4-1: Wiring for DC Input

The device is suitable to be supplied from a DC input voltage.

### Instructions for DC use:

a) Use a battery or a similar DC source.

### ⚠ WARNING

A supply from the intermediate DC-bus of a frequency converter is not recommended and can cause a malfunction or damage the unit.

b) Connect (+) pole to L and (-) pole to N.

c) Connect the PE terminal to an earth wire or to the machine ground.

## 5. Input Inrush Current

An active inrush limitation circuit (NTCs, which are bypassed by a relay contact) limits the input inrush current after turn-on of the input voltage.

The charging current into EMI suppression capacitors is disregarded in the first microseconds after switch-on.

|                           |      | AC 100V             | AC 120V             | AC 230V             |                     |
|---------------------------|------|---------------------|---------------------|---------------------|---------------------|
| Inrush current $I_{peak}$ | max. | 11A                 | 7A                  | 11A                 | at 40°C, cold start |
|                           | typ. | 9A                  | 6A                  | 6A                  | at 25°C, cold start |
|                           | typ. | 9A                  | 6A                  | 9A                  | at 40°C, cold start |
| Inrush energy $I^2t$      | max. | 0.1A <sup>2</sup> s | 0.1A <sup>2</sup> s | 0.4A <sup>2</sup> s | at 40°C, cold start |

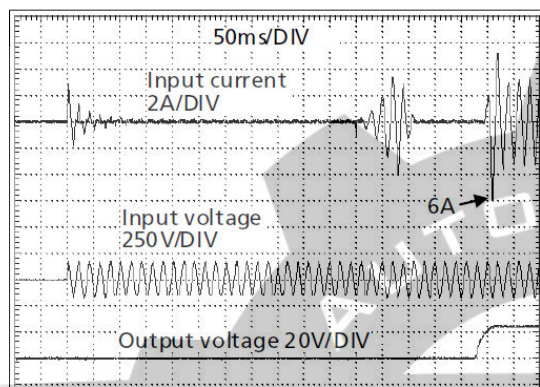


Fig. 5-1: Typical turn-on behaviour at nominal load and 25°C ambient

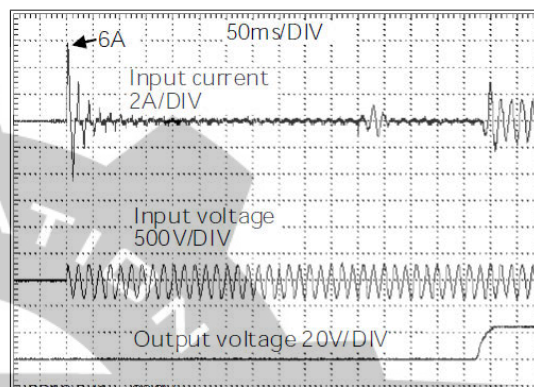


Fig. 5-2: Typical turn-on behaviour at nominal load, 230Vac input and 25°C ambient

## 6. Output

The output provides a SELV/PELV/ES1 rated voltage, which is galvanically isolated from the input voltage. The output of the devices includes a decoupling MOSFET for building 1+1 or N+1 redundant power supply systems.

The device is designed to supply any kind of loads, including capacitive and inductive loads. If extreme large capacitors, such as EDLCs (electric double layer capacitors or "UltraCaps") with a capacitance larger than 1.5F are connected to the output, the unit might charge the capacitor in the Hiccup<sup>PLUS</sup> mode.

The device is featured with a "soft output regulation characteristic" in order to achieve current share between multiple devices when they are connected in parallel. The "soft output regulation characteristic" regulates the output voltage in such a manner that the voltage at no load is approx. 4% higher than at nominal load.

|                                     |                                    |                                |                                                                                                                                                                                                                                                                     |
|-------------------------------------|------------------------------------|--------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Output voltage                      | nom.                               | DC 24V                         | 23.8-25.2V                                                                                                                                                                                                                                                          |
| Adjustment range                    |                                    | See chapter 25.2               |                                                                                                                                                                                                                                                                     |
| Factory settings                    | typ.                               | 24.1V                          | ±0.2%, at 10A, cold unit (results to typ. 23.9V±0.2% at 12A and typ. 25.1V±0.2% at no load)                                                                                                                                                                         |
| Line regulation                     | max.                               | 10mV                           | Between 85Vac and 300Vac                                                                                                                                                                                                                                            |
| Load regulation                     | max.                               | 1000mV                         | Between 0A and 10A, static value, see Fig. 6-1                                                                                                                                                                                                                      |
| Ripple and noise voltage            | max.                               | 50mVpp                         | Bandwidth 20Hz to 20MHz, 50Ohm                                                                                                                                                                                                                                      |
| Output current                      | nom.                               | 12A <sup>1)</sup>              | Below 45°C and ambient temperatures, see Fig. 17-1                                                                                                                                                                                                                  |
|                                     | nom.                               | 10A                            | At 60°C ambient temperature, see Fig. 17-1                                                                                                                                                                                                                          |
|                                     | nom.                               | 7.5A                           | At 70°C and ambient temperatures below, see Fig. 17-1                                                                                                                                                                                                               |
|                                     |                                    | Derate between +45°C and +70°C |                                                                                                                                                                                                                                                                     |
| Fuse breaking current <sup>2)</sup> | typ.                               | 30A                            | Up to 12ms once every five seconds, see Fig. 6-2.                                                                                                                                                                                                                   |
| Overload behaviour                  | Continuous current                 |                                | For output voltage above 13Vdc, see Fig. 6-1                                                                                                                                                                                                                        |
|                                     | Intermittend current <sup>3)</sup> |                                | For output voltage below 13Vdc, see Fig. 6-1                                                                                                                                                                                                                        |
| Overload/<br>short-circuit current  | max.                               | 15.5A                          | Continuous current, see Fig. 6-1                                                                                                                                                                                                                                    |
|                                     | typ.                               | 14A                            | Intermittent current peak value for typ. 2s<br>Load impedance 10mOhm, see Fig. 6-2.<br>Discharge current of output capacitors is not included.                                                                                                                      |
|                                     | max.                               | 5A                             | Intermittent current average value (R.M.S.)<br>Load impedance 10mOhm, see Fig. 6-2                                                                                                                                                                                  |
| Output capacitance                  | typ.                               | 4 400µF                        | Included inside the power supply                                                                                                                                                                                                                                    |
| Back-feeding loads                  | max.                               | 35V                            | The unit is resistant and does not show malfunctioning when a load feeds back voltage to the power supply. It does not matter whether the power supply is on or off. The absorbing energy can be calculated according to the built-in large sized output capacitor. |

- 1) This current is also available for temperatures up to +70°C with a duty cycle of 10% and/or not longer than 1 minute every 10 minutes.
- 2) The fuse breaking current is an enhanced transient current which helps to start heavy loads or to trip fuses on faulty output branches. The output voltage stays above 20V.
- 3) At heavy overloads (when output voltage falls below 13V), the power supply delivers continuous output current for 2s. After this, the output is switched off for approx. 18s before a new start attempt is automatically performed. This cycle is repeated as long as the overload exists. If the overload has been cleared, the device will operate normally. See Fig. 6-3.

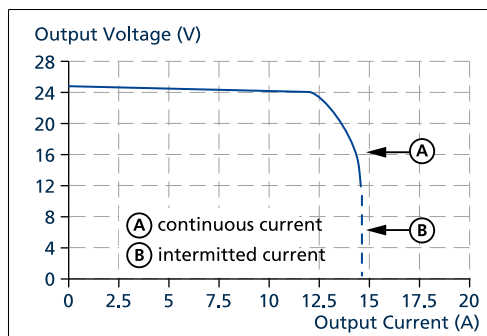


Fig. 6-1: Output voltage vs. output current, typ.

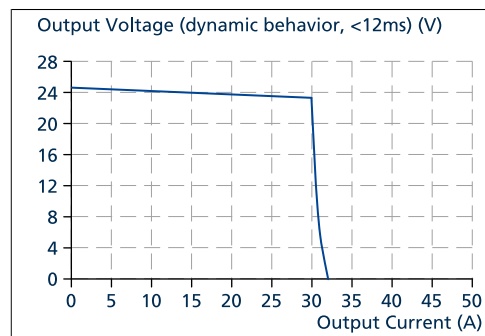


Fig. 6-2: Dynamic overcurrent capability, typ.

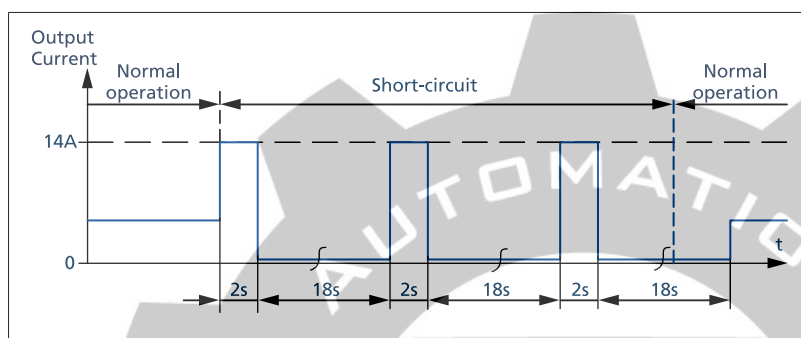


Fig. 6-3: Short-circuit on output, Hiccup<sup>PLUS</sup> mode, typ.

## 7. Hold-up Time

|              |      | AC 100V | AC 120V | AC 230V |                           |
|--------------|------|---------|---------|---------|---------------------------|
| Hold-up time | typ. | 73ms    | 73ms    | 73ms    | At 24V, 5A, see Fig. 7-1  |
|              | min. | 55ms    | 55ms    | 55ms    | At 24V, 5A, see Fig. 7-1  |
|              | typ. | 37ms    | 37ms    | 37ms    | At 24V, 10A, see Fig. 7-1 |
|              | min. | 28ms    | 28ms    | 28ms    | At 24V, 10A, see Fig. 7-1 |

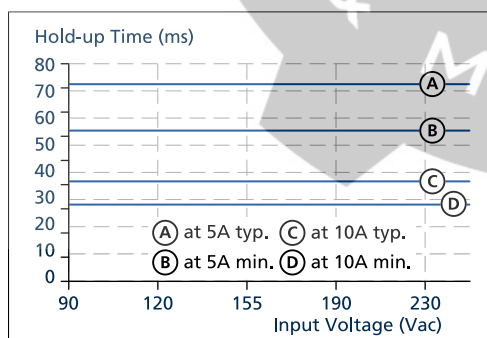


Fig. 7-1: Hold-up time vs. input voltage

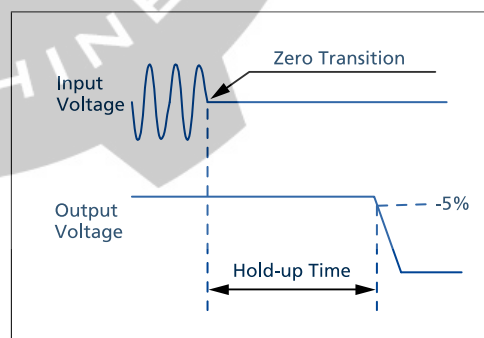


Fig. 7-2: Shut-down behaviour, definitions

## 8. DC-OK Relay Contact

This feature monitors the output voltage on the output terminals of a running power supply.

|                      |                                                                                                                                                                                     |
|----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Contact closes       | As soon as the output voltage reaches typ. 90% of the adjusted output voltage level.                                                                                                |
| Contact opens        | As soon as the output voltage dips more than 10% below the adjusted output voltage. Short dips will be extended to a signal length of 100ms. Dips shorter than 1ms will be ignored. |
| Switching hysteresis | typ. 1V                                                                                                                                                                             |
| Contact ratings      | Maximal 60Vdc 0.3A, 30Vdc 1A, 30Vac 0.5A, resistive load<br>Minimal permissible load: 1mA at 5Vdc                                                                                   |
| Isolation voltage    | See dielectric strength table in chapter 20.                                                                                                                                        |

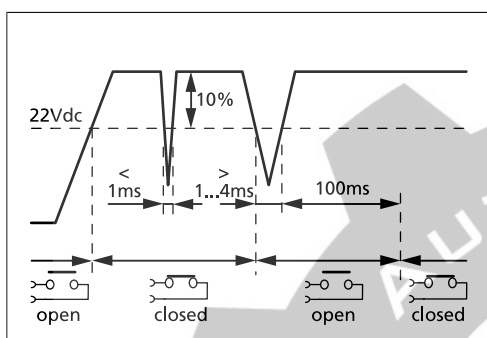


Fig. 8-1: DC-ok relay contact behavior

## 9. Efficiency And Power Losses

|                                  |      | AC 100V | AC 120V | AC 230V |                                                    |
|----------------------------------|------|---------|---------|---------|----------------------------------------------------|
| Efficiency                       | typ. | 92.2%   | 93%     | 94.7%   | At 24V, 10A                                        |
|                                  | typ. | 91.9%   | 92.8%   | 94.6%   | At 24V, 12A (Power Boost)                          |
| Average efficiency <sup>*)</sup> | typ. | 91.8%   | 92.4%   | 93.9%   | 25% at 2.5A, 25% at 5A,<br>25% at 7.5A, 25% at 10A |
| Power losses                     | typ. | 4W      | 3.7W    | 2.9W    | At 24V, 0A                                         |
|                                  | typ. | 11.3W   | 10.7W   | 8.6W    | At 24V, 5A                                         |
|                                  | typ. | 20.3W   | 18.1W   | 13.4W   | At 24V, 10A                                        |
|                                  | typ. | 25.4W   | 22.3W   | 16.4W   | At 24V, 12A (Power Boost)                          |

<sup>\*)</sup> The average efficiency is an assumption for a typical application where the power supply is loaded with 25% of the nominal load for 25% of the time, 50% of the nominal load for another 25% of the time, 75% of the nominal load for another 25% of the time and with 100% of the nominal load for the rest of the time.

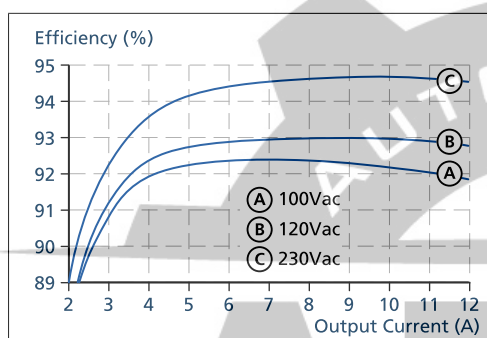


Fig. 9-1: Efficiency vs. output current at 24V, typ.

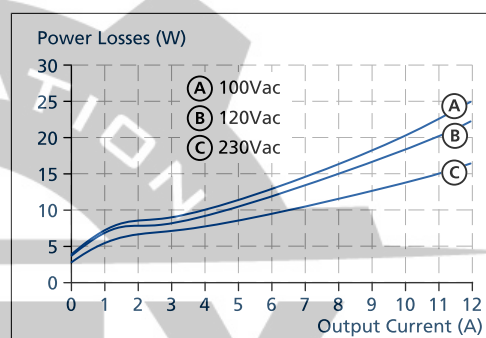


Fig. 9-2: Losses vs. output current at 24V, typ.

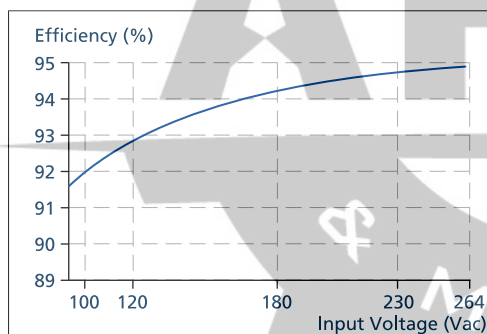


Fig. 9-3: Efficiency vs. input voltage at 24V, 10A, typ.

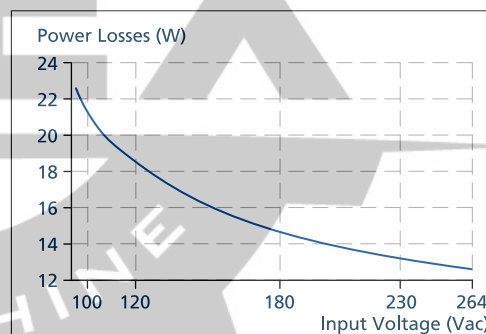


Fig. 9-4: Losses vs. input voltage at 24V, 10A, typ.

## 10. Lifetime Expectancy

The lifetime expectancy shown in the table indicates the minimum operating hours (service life) and is determined by the lifetime expectancy of the built-in electrolytic capacitors. Lifetime expectancy is specified in operational hours and is calculated according to the capacitor's manufacturer specification. The manufacturer of the electrolytic capacitors only guarantees a maximum life of up to 15 years (131 400h). Any number exceeding this value is a calculated theoretical lifetime, which can be used to compare devices.

|                     | AC 100V  | AC 120V  | AC 230V  |                      |
|---------------------|----------|----------|----------|----------------------|
| Lifetime expectancy | 143 000h | 153 000h | 188 000h | At 24V, 5A and 40°C  |
|                     | 405 000h | 434 000h | 531 000h | At 24V, 5A and 25°C  |
|                     | 66 000h  | 78 000h  | 109 000h | At 24V, 10A and 40°C |
|                     | 188 000h | 220 000h | 307 000h | At 24V, 10A and 25°C |
|                     | 37 000h  | 47 000h  | 71 000h  | At 24V, 12A and 40°C |
|                     | 105 000h | 132 000h | 200 000h | At 24V, 12A and 25°C |

## 11. MTBF

MTBF stands for **Mean Time Between Failure**, which is calculated according to statistical device failures, and indicates reliability of a device. It is the statistical representation of the likelihood of a unit to fail and does not necessarily represent the life of a product.

The MTBF figure is a statistical representation of the likelihood of a device to fail. A MTBF figure of e.g. 1 000 000h means that statistically one unit will fail every 100 hours if 10 000 units are installed in the field. However, it can not be determined if the failed unit has been running for 50 000h or only for 100h.

For these types of units the MTTF (Mean Time To Failure) value is the same value as the MTBF value.

|                          | AC 100V  | AC 120V    | AC 230V    |                                             |
|--------------------------|----------|------------|------------|---------------------------------------------|
| MTBF SN 29500, IEC 61709 | 535 000h | 556 000h   | 641 000h   | At 24V, 10A and 40°C                        |
|                          | 972 000h | 1 006 000h | 1 138 000h | At 24V, 10A and 25°C                        |
| MTBF MIL HDBK 217F       | 205 000h | 208 000h   | 232 000h   | At 24V, 10A and 40°C;<br>Ground Benign GB40 |
|                          | 279 000h | 283 000h   | 318 000h   | At 24V, 10A and 25°C;<br>Ground Benign GB25 |
|                          | 45 000h  | 46 000h    | 53 000h    | At 24V, 10A and 40°C;<br>Ground Fixed GF40  |
|                          | 58 000h  | 59 000h    | 63 000h    | At 24V, 10A and 25°C;<br>Ground Fixed GF25  |

## 12. Functional Diagram

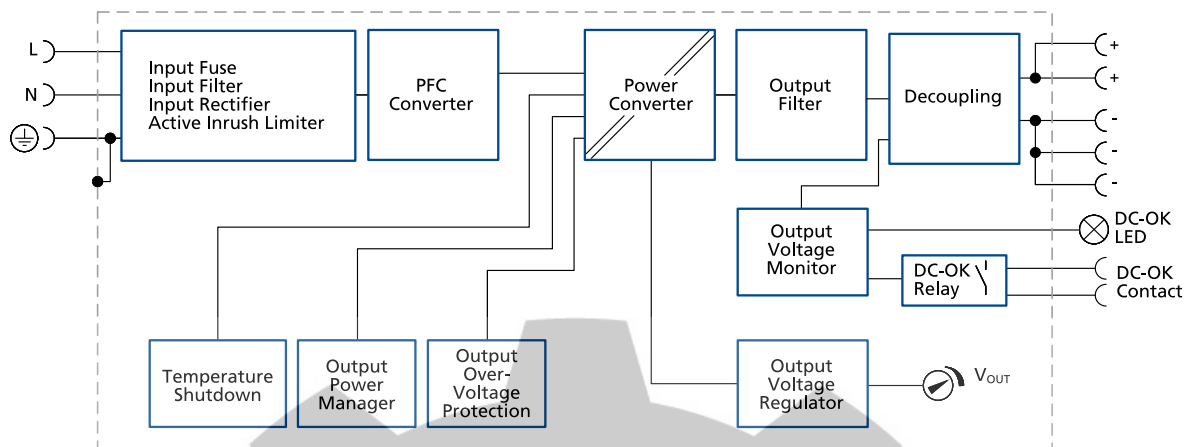


Fig. 12-1: Functional diagram CP10.241-R1

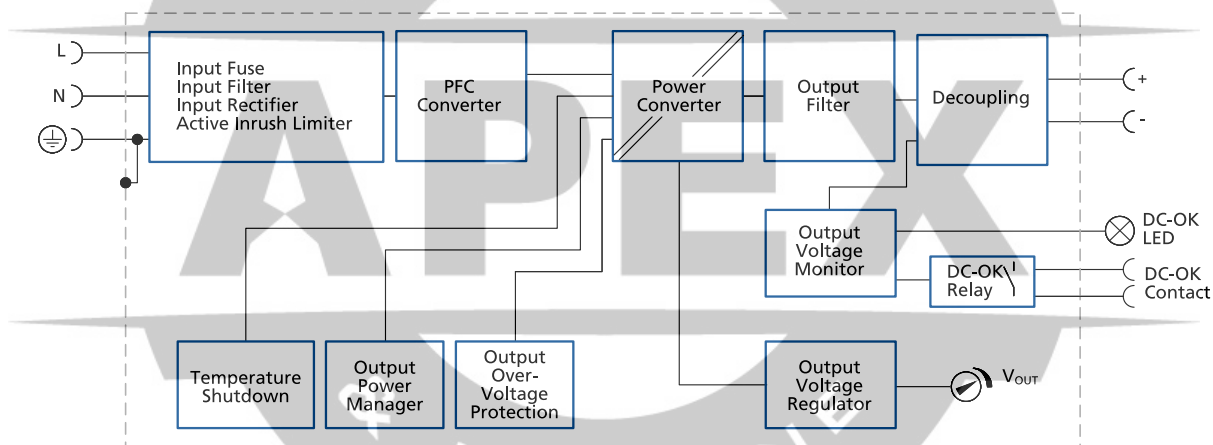


Fig. 12-2: Functional diagram CP10.241-R2, CP10.241-R2-C1

## 13. Terminals And Wiring

The terminals are IP20 Finger safe constructed and suitable for field- and factory wiring.

| CP10.241-R1                             | Input                                                          | Output                                                         | DC-OK-Signal                                                   |
|-----------------------------------------|----------------------------------------------------------------|----------------------------------------------------------------|----------------------------------------------------------------|
| <b>Type</b>                             | Quick-connect spring-clamp terminals                           | Quick-connect spring-clamp terminals                           | Push-in terminals                                              |
| Solid wire                              | Max. 6mm <sup>2</sup>                                          | Max. 6mm <sup>2</sup>                                          | Max. 1.5mm <sup>2</sup>                                        |
| Stranded wire                           | Max. 4mm <sup>2</sup>                                          | Max. 4mm <sup>2</sup>                                          | Max. 1.5mm <sup>2</sup>                                        |
| American Wire Gauge                     | AWG 20-10                                                      | AWG 20-10                                                      | AWG 24-16                                                      |
| Max. wire diameter (including ferrules) | 2.8mm                                                          | 2.8mm                                                          | 1.6mm                                                          |
| Wire stripping length                   | 10mm / 0.4inch                                                 | 10mm / 0.4inch                                                 | 7mm / 0.28inch                                                 |
| Screwdriver                             |                                                                |                                                                | 3mm slotted to open the spring                                 |
| <b>CP10.241-R2, CP10.241-R2-C1</b>      | <b>Input</b>                                                   | <b>Output</b>                                                  | <b>DC-OK-Signal</b>                                            |
| <b>Type</b>                             | Plug connector with screw terminals                            | Plug connector with screw terminals                            | Plug connector with screw terminals                            |
| Solid wire                              | Max. 4mm <sup>2</sup>                                          | Max. 4mm <sup>2</sup>                                          | Max. 1.5mm <sup>2</sup>                                        |
| Stranded wire                           | Max. 2.5mm <sup>2</sup>                                        | Max. 2.5mm <sup>2</sup>                                        | Max. 1.5mm <sup>2</sup>                                        |
| American Wire Gauge                     | AWG 20-12                                                      | AWG 20-12                                                      | AWG 26-16                                                      |
| Max. wire diameter (including ferrules) | 2.4mm                                                          | 2.4mm                                                          | 1.8mm                                                          |
| Recommend tightening torque             | max. 0.5Nm, 4.5lb-in                                           | max. 0.5Nm, 4.5lb-in                                           | max. 0.8Nm, 7lb-in                                             |
| Wire stripping length                   | 7mm / 0.28inch                                                 | 7mm / 0.28inch                                                 | 6mm / 0.24inch                                                 |
| Screwdriver                             | 3.5mm slotted or cross-head No 2                               | 3.5mm slotted or cross-head No 2                               | 3mm slotted                                                    |
|                                         | Do not unplug the connectors more often than 20 times in total | Do not unplug the connectors more often than 20 times in total | Do not unplug the connectors more often than 20 times in total |

### Instructions for Wirings:

- Use appropriate copper cables that are designed for minimum operating temperatures of:  
 +60°C for ambient up to +45°C and  
 +75°C for ambient up to +60°C minimum  
 +90°C for ambient up to +70°C minimum.
- Follow national installation codes and installation regulations!
- Ensure that all strands of a stranded wire enter the terminal connection!
- Unused terminal compartments should be securely tightened.
- Ferrules are allowed.

## 14. Replacing Units While The System Is Running

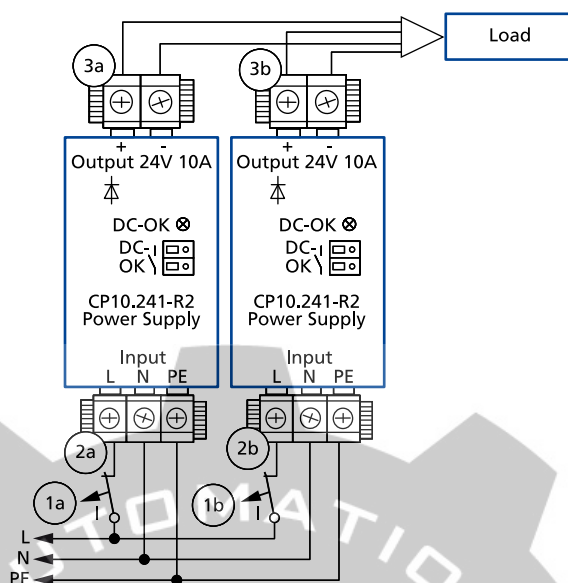


Fig. 14-1: Replacing the power supply or redundancy module while the system is running

### Instructions:

- Switch-off circuit breaker (1a).
- Remove plug (2a).
- Remove plug (3a). The plug prevents the cables from shorting.
- Change power supply.
- Put the plug (3a) back in.
- Put the plug (2a) back in.
- Turn-on the circuit breaker (1a).
- The circuit is redundant again.

To replace the right power supply, repeat the process above using (1b), (2b) and (3b).

## 15. Front Side And User Elements

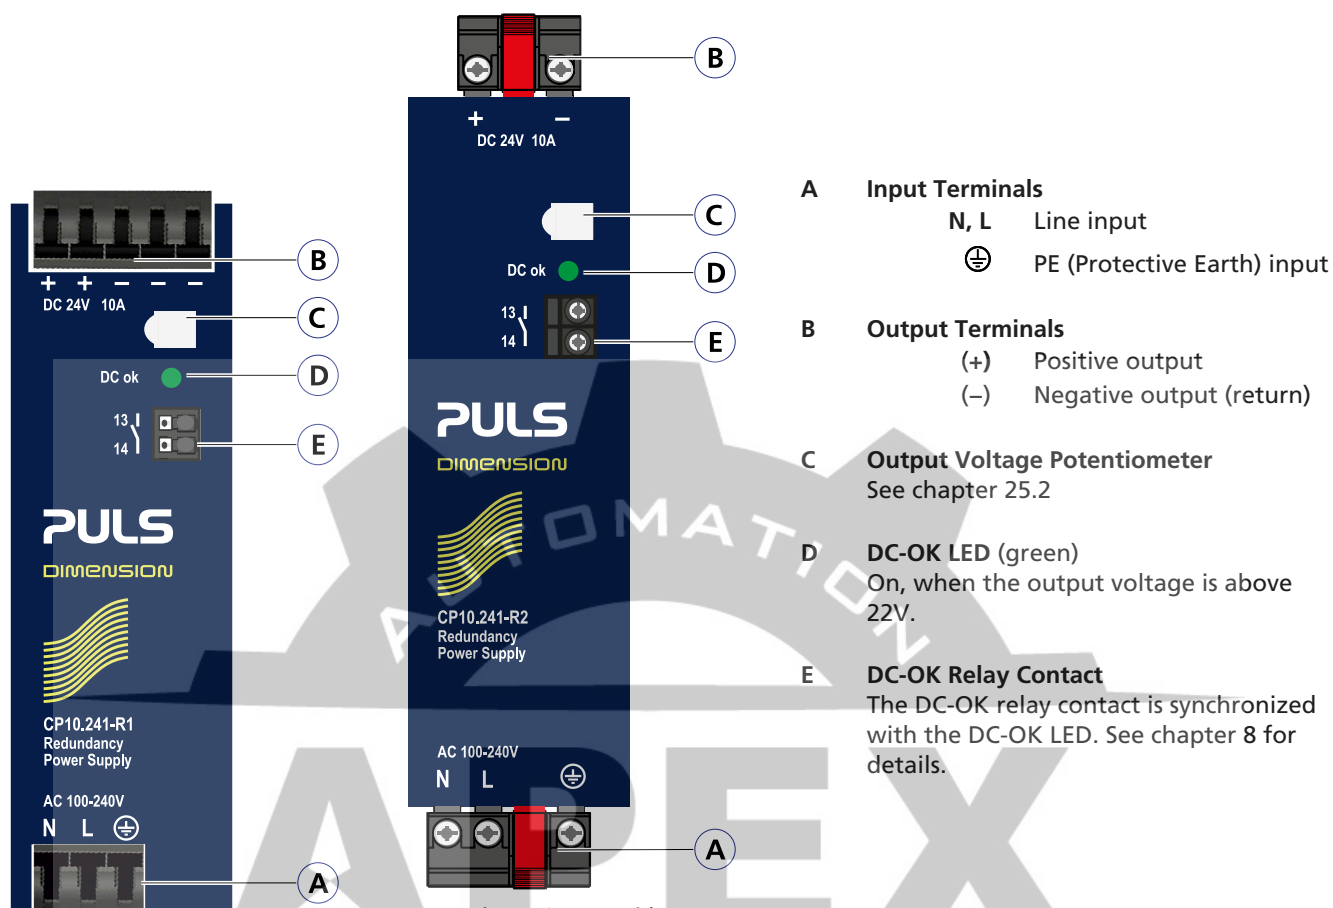


Fig. 15-1: Front side CP10.241-R1

Fig. 15-2: Front side  
 CP10.241-R2, CP10.241-R2-C1

## 16. EMC

The EMC behavior of the device is designed for applications in industrial environment as well as in residential, commercial and light industry environments.

| EMC Immunity             | According to generic standards: EN 61000-6-1 and EN 61000-6-2 |                                                          |               |             |
|--------------------------|---------------------------------------------------------------|----------------------------------------------------------|---------------|-------------|
| Electrostatic discharge  | EN 61000-4-2                                                  | Contact discharge                                        | 8kV           | Criterion A |
|                          |                                                               | Air discharge                                            | 15kV          | Criterion A |
| Electromagnetic RF field | EN 61000-4-3                                                  | 80MHz - 2.7GHz                                           | 20V/m         | Criterion A |
| Fast transients (Burst)  | EN 61000-4-4                                                  | Input lines                                              | 4kV           | Criterion A |
|                          |                                                               | Output lines                                             | 2kV           | Criterion A |
|                          |                                                               | DC-OK signal (coupling clamp)                            | 2kV           | Criterion A |
| Surge voltage on input   | EN 61000-4-5                                                  | L → N                                                    | 2kV           | Criterion A |
|                          |                                                               | L → PE, N → PE                                           | 4kV           | Criterion A |
| Surge voltage on output  | EN 61000-4-5                                                  | + → -                                                    | 1kV           | Criterion A |
|                          |                                                               | + / - → PE                                               | 2kV           | Criterion A |
| Surge voltage on DC-OK   | EN 61000-4-5                                                  | DC-OK signal → PE                                        | 1kV           | Criterion A |
| Conducted disturbance    | EN 61000-4-6                                                  | 0.15 - 80MHz                                             | 20V           | Criterion A |
| Mains voltage dips       | EN 61000-4-11                                                 | 0% of 100Vac                                             | 0Vac, 20ms    | Criterion A |
|                          |                                                               | 40% of 100Vac                                            | 40Vac, 200ms  | Criterion C |
|                          |                                                               | 70% of 100Vac                                            | 70Vac, 500ms  | Criterion A |
|                          |                                                               | 0% of 200Vac                                             | 0Vac, 20ms    | Criterion A |
|                          |                                                               | 40% of 200Vac                                            | 80Vac, 200ms  | Criterion A |
|                          |                                                               | 70% of 200Vac                                            | 140Vac, 500ms | Criterion A |
| Voltage interruptions    | EN 61000-4-11                                                 | 0% of 200Vac (=0V)                                       | 5000ms        | Criterion C |
| Voltage sags             | SEMI F47                                                      | Dips on the input voltage according to SEMI F47 standard |               |             |
|                          |                                                               | 80% of 120Vac (96Vac)                                    | 1000ms        | Criterion A |
|                          |                                                               | 70% of 120Vac (84Vac)                                    | 500ms         | Criterion A |
|                          |                                                               | 50% of 120Vac (60Vac)                                    | 200ms         | Criterion A |
| Powerful transients      | VDE 0160                                                      | Over entire load range                                   | 750V, 0.3ms   | Criterion A |

### Performance criteria:

- A: The device shows normal operation behavior within the defined limits.  
C: Temporary loss of function is possible. The device may shut-down and restarts by itself. No damage or hazards for the device will occur.

| EMC Emission                    | According to generic standards: EN 61000-6-3 and EN 61000-6-4 |                                                                                        |  |
|---------------------------------|---------------------------------------------------------------|----------------------------------------------------------------------------------------|--|
| Conducted emission input lines  | EN 55011, EN 55015, EN 55032, FCC Part 15, CISPR 11, CISPR 32 | Class B                                                                                |  |
| Conducted emission output lines | IEC/CISPR 16-1-2, IEC/CISPR 16-2-1                            | Limits for DC power ports according to EN 61000-6-3 are fulfilled                      |  |
| Radiated emission               | EN 55011, EN 55032                                            | Class B                                                                                |  |
| Harmonic input current (PFC)    | EN 61000-3-2                                                  | Class A fulfilled between 0A and 12A load<br>Class C fulfilled between 6A and 12A load |  |
| Voltage fluctuations, flicker   | EN 61000-3-3                                                  | Fulfilled, tested with constant current loads, non pulsing                             |  |

This device complies with FCC Part 15 rules.

Operation is subjected to following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

### Switching Frequencies

|                     |        |                       |
|---------------------|--------|-----------------------|
| PFC converter       | 100kHz | Fixed frequency       |
| Main converter      | 84-140 | Output load dependent |
| Auxiliary converter | 60kHz  | Fixed frequency       |

## 17. Environment

|                                      |                                                                                                                                                             |                                                                                                                                                                                         |
|--------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Operational temperature <sup>1</sup> | -25°C to +70°C (-13°F to 158°F)                                                                                                                             |                                                                                                                                                                                         |
| Storage temperature                  | -40°C to +85°C (-40°F to 185°F)                                                                                                                             | For storage and transportation                                                                                                                                                          |
| Output de-rating <sup>2</sup>        | 0.13A/°C<br>0.25A/°C<br>0.63A/1000m or 5°C/1000m<br>0.38A/-5kPa or 3°C/-5kPa                                                                                | Between +45°C and +60°C (113°F to 140°F)<br>Between +60°C and +70°C (140°F to 158°F)<br>For altitudes >2000m (6560ft), see Fig. 17-2<br>For atmospheric pressures <80kPa, see Fig. 17-2 |
|                                      | The de-rating is not hardware controlled. The user has to take care by himself to stay below the de-rated current limits in order not to overload the unit. |                                                                                                                                                                                         |
| Humidity <sup>3</sup>                | 5 to 95% r.h.                                                                                                                                               | According to IEC 60068-2-30                                                                                                                                                             |
| Atmospheric pressure                 | 110-47kPa                                                                                                                                                   | See Fig. 17-2 for details                                                                                                                                                               |
| Altitude                             | Up to 6000m (20 000ft)                                                                                                                                      | See Fig. 17-2 for details                                                                                                                                                               |
| Over-voltage category                | III<br>II                                                                                                                                                   | According to IEC 60664-1 for altitudes >2000m and 6000m and atmospheric pressures from 80-47kPa                                                                                         |
| Degree of pollution                  | 2                                                                                                                                                           | According to IEC 60664-1, not conductive                                                                                                                                                |
| Vibration sinusoidal                 | 2-17.8Hz: ±1.6mm;<br>17.8-500Hz: 2g<br>2 hours / axis                                                                                                       | According to IEC 60068-2-6                                                                                                                                                              |
| Shock                                | 30g 6ms, 20g 11ms<br>3 bumps per direction, 18 bumps in total                                                                                               | According to IEC 60068-2-27                                                                                                                                                             |
| Audible noise                        | Some audible noise may be emitted from the power supply during no load, overload or short circuit.                                                          |                                                                                                                                                                                         |

- Operational temperature is the same as the ambient or surrounding temperature and is defined as the air temperature 2cm below the unit.
- The de-rating is not hardware controlled. The user has to take this into consideration to stay below the de-rated current limits in order not to overload the unit.
- Do not energize while condensation is present.

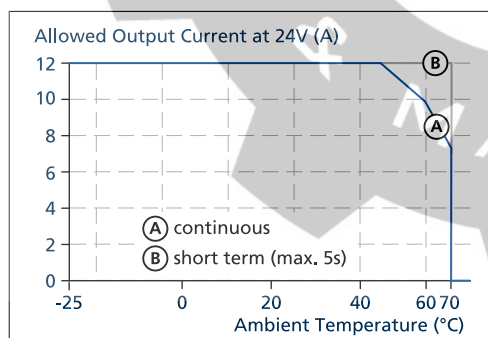


Fig. 17-1: Output current vs. ambient temp.

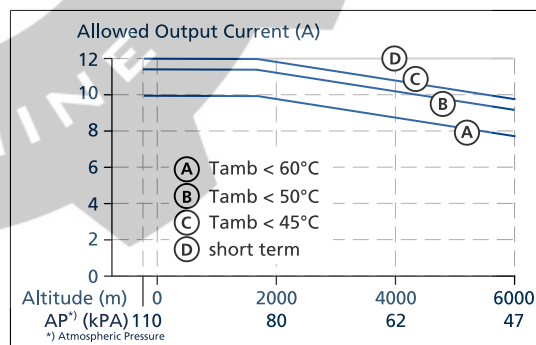


Fig. 17-2: Output current vs. altitude

## 18. Protection Features

|                                             |                            |                                                           |
|---------------------------------------------|----------------------------|-----------------------------------------------------------|
| Output over-voltage protection <sup>1</sup> | typ. 30.5Vdc<br>max. 32Vdc |                                                           |
| Degree of protection                        | IP 20                      | EN/IEC 60529                                              |
| Penetration protection                      | >4mm                       | E.g. screws, small parts                                  |
| Over-temperature protection <sup>2</sup>    | Included                   | Output shut-down with automatic restart.                  |
| Input transient protection                  | MOV (Metal Oxide Varistor) | For protection values see chapter 16 (EMC).               |
| Internal input fuse                         | Included                   | Not user replaceable slow-blow high-braking capacity fuse |

- 1) In case of an internal power supply defect, a redundant circuit limits the maximum output voltage. The output shuts down and automatically attempts to restart.
- 2) In safety critical situations a temperature sensor, which is installed inside the unit on a critical component, turns the unit off (e.g. de-rating requirements not observed, high ambient temperature, ventilation obstructed or the mounting orientation de-rating is not followed). There is no correlation between the operating temperature and turn-off temperature since this is dependent on input voltage, load and installation methods.

## 19. Safety Features

|                                 |                                                                                                                                            |                                                                                                                                                                                                                                                                                                    |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Class of protection             | I                                                                                                                                          | According to IEC 61140                                                                                                                                                                                                                                                                             |
| Isolation resistance            | >500MOhm<br>>500MOhm<br>>500MOhm<br>>500MOhm                                                                                               | At delivered condition between input and output, measured with 500Vdc<br>At delivered condition between input and PE, measured with 500Vdc<br>At delivered condition between output and PE, measured with 500Vdc<br>At delivered condition between output and DC-OK contacts, measured with 500Vdc |
| PE resistance                   | <0.1Ohm                                                                                                                                    | Resistance between PE terminal and the housing in the area of the DIN rail mounting bracket.                                                                                                                                                                                                       |
| Touch current (leakage current) | typ. 0.14mA / 0.36mA<br>typ. 0.2mA / 0.5mA<br>typ. 0.33mA / 0.86mA<br>max. 0.18mA / 0.43mA<br>max. 0.26mA / 0.61mA<br>max. 0.44mA / 1.05mA | At 100Vac, 50Hz, TN-, TT-mains / IT-mains<br>At 120Vac, 60Hz, TN-, TT-mains / IT-mains<br>At 230Vac, 50Hz, TN-, TT-mains / IT-mains<br>At 110Vac, 50Hz, TN-, TT-mains / IT-mains<br>At 132Vac, 60Hz, TN-, TT-mains / IT-mains<br>At 264Vac, 50Hz, TN-, TT-mains / IT-mains                         |

## 20. Dielectric Strength

The output voltage is floating and has no ohmic connection to the ground.

Type and routine tests are conducted by the manufacturer. Field tests may be conducted in the field using the appropriate test equipment which applies the voltage with a slow ramp (2s up and 2s down). Connect all input-terminals together as well as all output poles before conducting the test. When testing, set the cut-off current settings to the value in the table below.

We recommend that either the (+) pole or the (-) pole shall be connected to the protective earth system. This helps to avoid situations in which a load starts unexpectedly or can not be switched off when unnoticed earth faults occur.

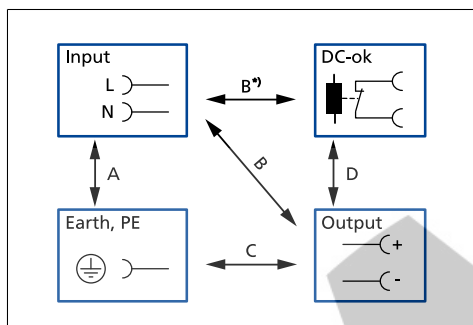


Fig. 20-1: Dielectric strength

|                                     |     | A       | B       | C       | D      |
|-------------------------------------|-----|---------|---------|---------|--------|
| Type test                           | 60s | 2500Vac | 4000Vac | 1000Vac | 500Vac |
| Factory test                        | 5s  | 2500Vac | 2500Vac | 500Vac  | 500Vac |
| Field test                          | 5s  | 2000Vac | 2000Vac | 500Vac  | 500Vac |
| Field test cut-off current settings |     | >10mA   | >10mA   | >20mA   | >1mA   |

B\*) When testing input to DC-OK ensure that the max. voltage between DC-OK and the output is not exceeded (column D). We recommend connecting DC-OK pins and the output pins together when performing the test.

## 21. Approvals And Fulfilled Standards

|                |                                                                                                                                    |                                                                                                                                                                                                                                                                           |
|----------------|------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| IEC 60950-1    | <b>IECEE</b><br>CB SCHEME                                                                                                          | CB Scheme Certificate<br>IEC 60950-1 - General safety requirements for Information Technology Equipment (ITE)                                                                                                                                                             |
| IEC 62368      | <b>IECEE</b><br>CB SCHEME                                                                                                          | CB Scheme Certificate<br>IEC 62368-1 - Audio/video, information and communication technology equipment - Safety requirements<br>Output safety level: ES1                                                                                                                  |
| IEC 61010      | <b>IECEE</b><br>CB SCHEME                                                                                                          | CB Scheme Certificate<br>IEC 61010-2-201 - Electrical Equipment for Measurement, Control and Laboratory Use - Particular requirements for control equipment                                                                                                               |
| UL 61010       |                                                   | UL Certificate<br>Listed equipment for category NMTR - UL 61010-2-201 - Electrical equipment for measurement, control and laboratory use - Particular requirements for control equipment<br>Applicable for US and Canada<br>E-File: E198865                               |
| Class I Div 2  |                                                   | UL Certificate<br>Listed equipment for category NRAD - Industrial control equipment for use in hazardous locations<br>Applicable for US and Canada<br>E-File: E327416<br>Temperature code: T4<br>Groups: A, B, C and D                                                    |
| ATEX           |                                                 | Agency Certificate (Bureau Veritas)<br>EN 60079-0 Explosive atmospheres - General requirements<br>EN 60079-7, EN 60079-15 Equipment protection by type of protection "e" and "n"<br>Certificate: EPS 15 ATEX 1 101 X<br>Temperature Code: T4<br>Type of Protection: ec nC |
| IECEX          | <b>IECEX</b>                                                                                                                       | IECEX Certificate<br>IEC 60079-0 Explosive atmospheres - General requirements<br>IEC 60079-7, IEC 60079-15 Equipment protection by type of protection "e" and "n"<br>Certificate: IECEX EPS 15.0079X<br>Temperature Code: T4<br>Type of Protection: ec nC                 |
| Semi F47       | <b>SEMI F47</b>                                                                                                                    | Test Report<br>Voltage Sag Immunity for Semiconductor Processing Equipment<br>Tested for AC 208V L-L or L-N mains voltages, nominal output voltage and nominal output load                                                                                                |
| IEC 60068-2-60 | <b>Corrosion</b><br>IEC 60068-2-60<br>Method 4  | Manufacturer's Declaration (Online Document)<br>Environmental Tests, Flowing Mixed Gas Corrosion Test<br>Test: Ke - Method 4<br>H2S: 10ppb<br>NO2: 200ppb<br>Cl2: 10ppb<br>SO2: 200ppb<br>Test Duration: 3 weeks, which simulates a service life of at least 10 years.    |

ISA-71.04-1985

**Corrosion** ✓  
 G3-ISA-71.04

Manufacturer's Declaration (Online Document)

Airborne Contaminants Corrosion Test

Severity Level: G3 Harsh

H2S: 100ppb

NOx: 1250ppb

Cl2: 20ppb

SO2: 300ppb

Test Duration: 3 weeks, which simulates a service life of at least 10 years

VDMA 24364

**LABS**  
 VDMA 24364-C1-L/W

Paint Wetting Impairment Substances Test (or LABS-Test)

Tested for Zone 2 and Test Class C1 according to VDMA 24364-C1-L/W for solvents and water-based paints

## 22. Regulatory Compliance

EU Declaration of  
 Conformity



The CE mark indicates conformance with the European

- EMC directive
- Low-voltage directive (LVD)
- RoHS directive
- ATEX directive

WEEE Directive



Manufacturer's Statement

EU-Regulation on Waste Electrical and Electronic Equipment

Registered in Germany as business to business (B2B) products.

REACH Directive

**REACH** ✓

Manufacturer's Statement

EU-Regulation regarding the Registration, Evaluation, Authorization and Restriction of Chemicals

RoHS-China



Manufacturer's Statement

Administrative Measures for the Restriction of the Use of Hazardous Substances in Electrical and Electronic Products 25 years

EAC TR Registration



EAC Certificate

EAC EurAsian Conformity - Registration Russia,  
 Kazakhstan and Belarus  
 8504408200, 8504409000

## 23. Physical Dimensions And Weight

|                                              |                                                                                                                                                    |
|----------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------|
| Width                                        | 39mm / 1.54"                                                                                                                                       |
| Height                                       | 124mm / 4.88 " (without plug-connectors)                                                                                                           |
| Depth                                        | 117mm / 4.61" (without plug-connectors)<br>The DIN rail height must be added to the unit depth to calculate the total required installation depth. |
| Weight                                       | 600g / 1.32lb                                                                                                                                      |
| DIN rail                                     | Use 35mm DIN rails according to EN 60715 or EN 50022 with a height of 7.5 or 15mm.                                                                 |
| Housing material                             | Body: Aluminium alloy<br>Cover: Zinc-plated steel                                                                                                  |
| Installation clearances                      | See chapter 2.                                                                                                                                     |
| Penetration protection                       | Small parts like screws, nuts, etc. with a diameter larger than 4mm                                                                                |
| All dimensions in mm unless otherwise noted. |                                                                                                                                                    |

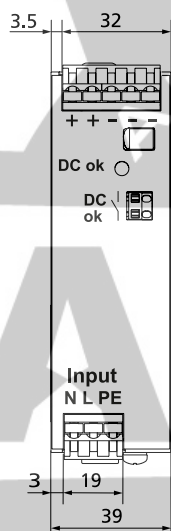


Fig. 23-1: Front view CP10.241-R1

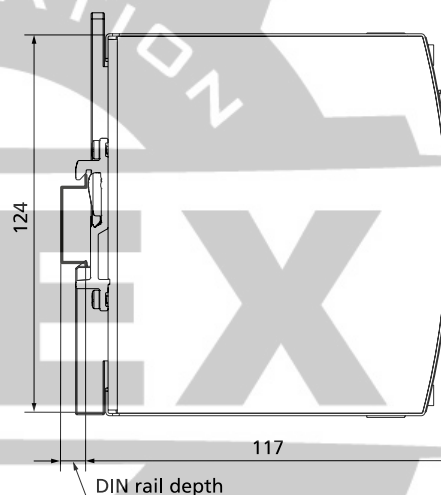


Fig. 23-2: Side view CP10.241-R1

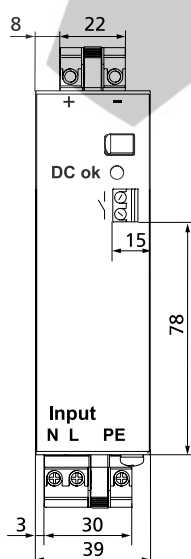


Fig. 23-3: Front view CP10.241-R2, CP10.241-R2-C1

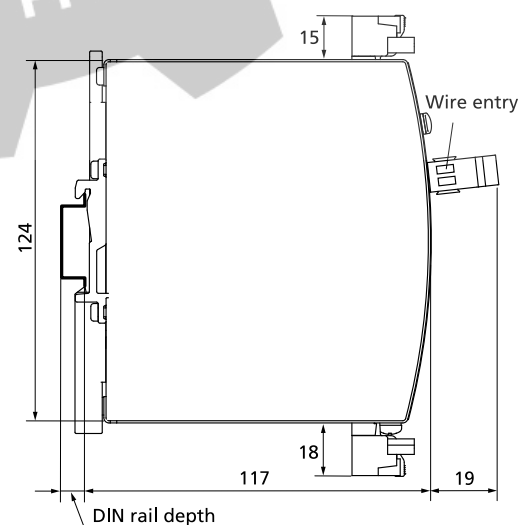


Fig. 23-4: Side view CP10.241-R2, CP10.241-R2-C1

## 24. Accessories

### 24.1. ZM10.WALL - WALL/PANEL MOUNT BRACKET

This bracket is used to mount the devices on a wall/panel without utilizing the DIN rail. The bracket can be mounted without detaching the DIN rail brackets from the power supply. All dimensions in mm unless otherwise noted.

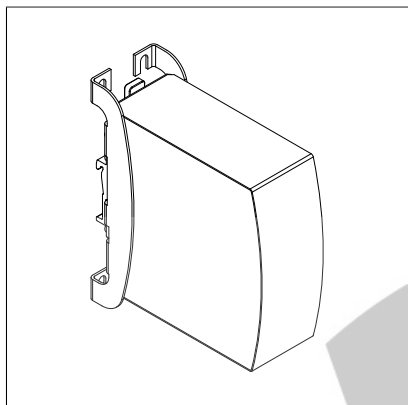


Fig. 24-1: Isometric view

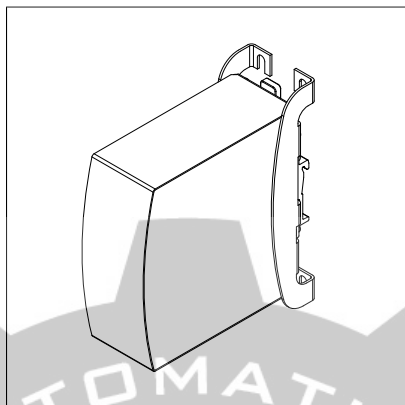


Fig. 24-2: Isometric view

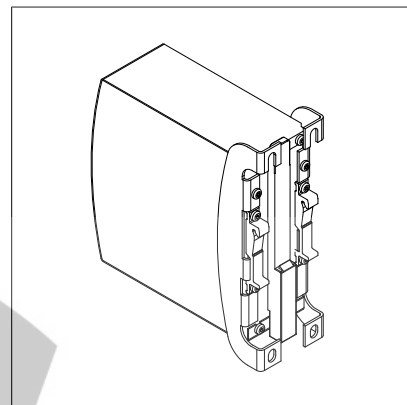


Fig. 24-3: Isometric view

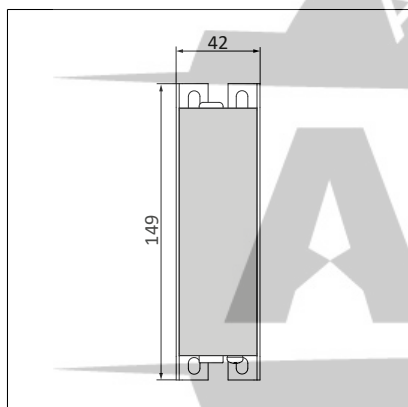


Fig. 24-4: Wall/panel mounting, front view

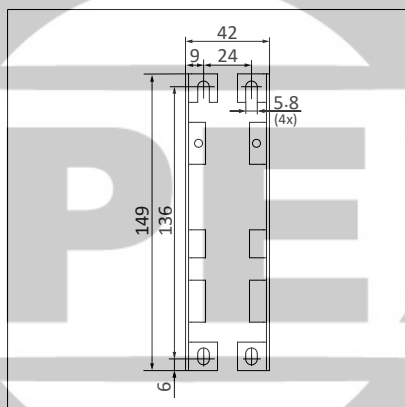


Fig. 24-5: Hole pattern for wall mounting

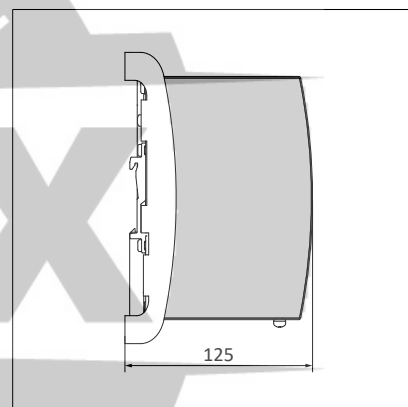


Fig. 24-6: Wall/panel mounting, side view

## 24.2. ZM12.SIDE - SIDE MOUNTING BRACKET

This bracket is used to mount the power supply sideways with or without utilizing a DIN rail. The two aluminum brackets and the black plastic slider of the unit have to be detached, so that the steel brackets can be mounted. For sideways DIN rail mounting, the removed aluminum brackets and the black plastic slider need to be mounted on the steel bracket. All dimensions in mm unless otherwise noted.

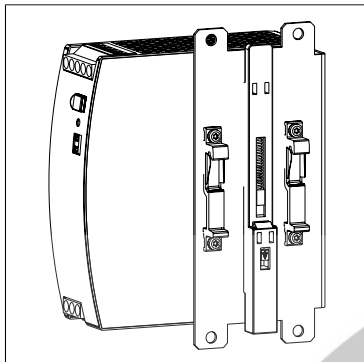


Fig. 24-7: Side mounting  
with DIN rail brackets

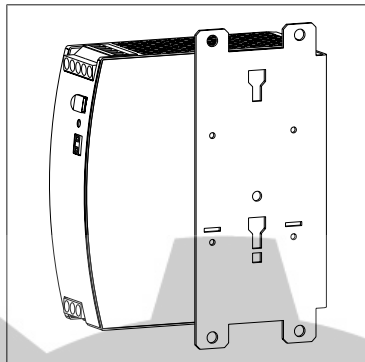


Fig. 24-8: Side mounting  
without DIN rail brackets

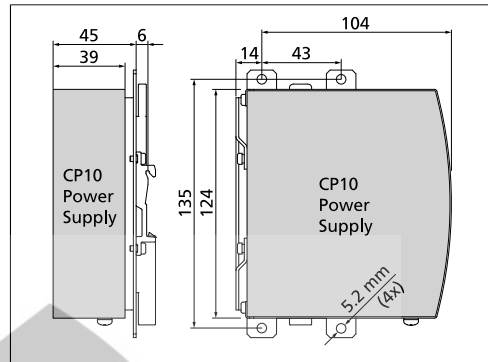


Fig. 24-9: Mounting Dimensions  
Side mounting bracket

## 25. Application Notes

### 25.1. PEAK CURRENT CAPABILITY

The device can deliver peak currents (up to several milliseconds) which are higher than the specified short term currents. This helps to start current demanding loads. Solenoids, contactors and pneumatic modules often have a steady state coil and a pick-up coil. The inrush current demand of the pick-up coil is several times higher than the steady-state current and usually exceeds the nominal output current. The same situation applies when starting a capacitive load.

The peak current capability also ensures the safe operation of subsequent circuit breakers of load circuits. The load branches are often individually protected with circuit breakers or fuses. In case of a short or an overload in one branch circuit, the fuse or circuit breaker need a certain amount of over-current to open in a timely manner. This avoids voltage loss in adjacent circuits.

The extra current (peak current) is supplied by the power converter and the built-in large sized output capacitors of the power supply. The capacitors get discharged during such an event, which causes a voltage dip on the output. The following three examples show typical voltage dips for resistive loads:

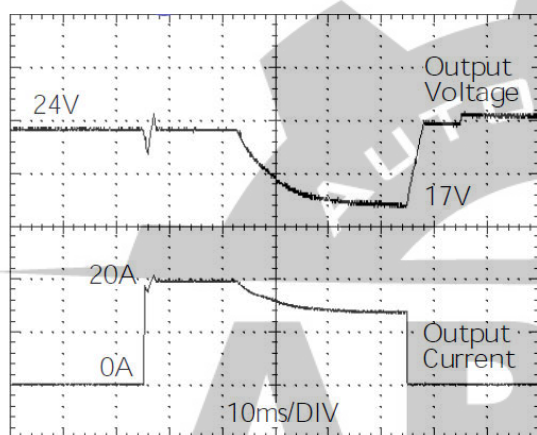


Fig. 25-1: 20A peak current for 50ms , typ. (2x the nominal current)

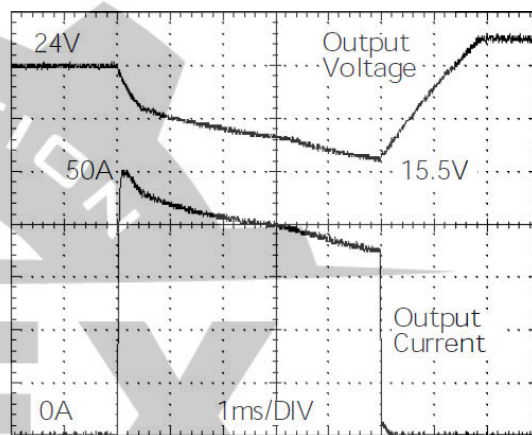


Fig. 25-2: 50A peak current for 5ms , typ. (5x the nominal current)

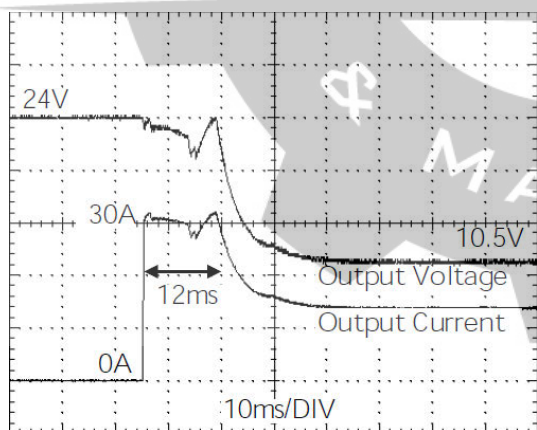


Fig. 25-3: 30A peak current for 12ms , typ. (3x the nominal current)

Please note: The DC-OK relay triggers when the voltage dips more than 10% for longer than 1ms.

|                           |      |                   |                                 |
|---------------------------|------|-------------------|---------------------------------|
| Peak current voltage dips | typ. | From 24V to 17V   | at 20A for 50ms, resistive load |
|                           | typ. | From 24V to 19V   | at 50A for 2ms, resistive load  |
|                           | typ. | From 24V to 15.5V | at 50A for 5ms, resistive load  |

## 25.2. ADJUSTING THE OUTPUT VOLTAGE

A voltage adjustment potentiometer can be found behind the flap on the front of the unit (see chapter 16). However, it is not recommended to change the output voltage since load sharing between power supplies connected in parallel can only be achieved by a precise setting of the output voltages. The factory settings allow precise load sharing and only qualified personnel should change the adjustment potentiometer.

### Lower end of the specified adjustment range

Output voltage                      nom.        24V

Due to the soft output voltage regulation characteristic (parallel mode feature) a setting to 24V results to an output voltage of  $23.8V \pm 0.2\%$  at 12A and  $25.0V \pm 0.2\%$  at no load. See Fig. 25-4.

Output current                    min.        12A  
                                         min.        10A  
                                         min.        7.5A

At +45°C  
At +60°C  
At +70°C

Reduce output current linearly between +45°C and +70°C

### Upper end of the specified adjustment range

Output voltage                    nom.        27V

Due to the soft output voltage regulation characteristic (parallel mode feature) a setting to 27V results to an output voltage of  $26.7V \pm 0.2\%$  at 10.6A and  $28.2V \pm 0.2\%$  at no load. See Fig. 25-4.

Output current                    min.        10.6A  
                                         min.        8.9A  
                                         min.        6.7A

At +45°C  
At +60°C  
At +70°C

Reduce output current linearly between +45°C and +70°C

The maximum output voltage which can occur at the clockwise end position of the potentiometer due to tolerances is 30V. It is not a guaranteed value which can be achieved.

Current values between 24 and 27V can be interpolated.

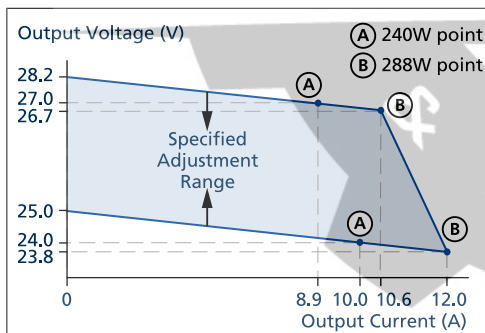


Fig. 25-4: Adjustment range of the output voltage

The output voltage shall only be changed when absolutely necessary, e.g. for battery charging as described in the next chapter.

## 25.3. OUTPUT CIRCUIT BREAKERS

Standard miniature circuit breakers (MCB's or UL 1077 circuit breakers) are commonly used for AC-supply systems and may also be used on 24V branches.

MCB's are designed to protect wires and circuits. If the ampere value and the characteristics of the MCB are adapted to the wire size that is used, the wiring is considered as thermally safe regardless of whether the MCB opens or not.

To avoid voltage dips and under-voltage situations in adjacent 24V branches which are supplied by the same source, a fast (magnetic) tripping of the MCB is desired. A quick shutdown within 10ms is necessary corresponding roughly to the ride-through time of PLC's. This requires power supplies with high current reserves and large output capacitors. Furthermore, the impedance of the faulty branch must be sufficiently small in order for the current to actually flow. The best current reserve in the power supply does not help if Ohm's law does not permit current flow. The following table has typical test results showing which B- and C-Characteristic MCBs magnetically trip depending on the wire cross section and wire length.

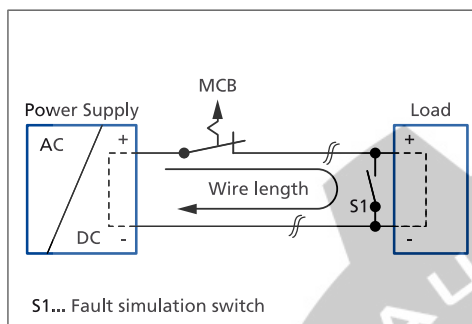


Fig. 25-5: Test circuit

Maximal wire length \*) for a fast (magnetic) tripping:

|              | 0.75mm <sup>2</sup> | 1.0mm <sup>2</sup> | 1.5mm <sup>2</sup> | 2.5mm <sup>2</sup> |
|--------------|---------------------|--------------------|--------------------|--------------------|
| <b>C-2A</b>  | 30m                 | 37m                | 54m                | 84m                |
| <b>C-3A</b>  | 25m                 | 30m                | 46m                | 69m                |
| <b>C-4A</b>  | 9m                  | 15m                | 25m                | 34m                |
| <b>C-6A</b>  | 3m                  | 3m                 | 4m                 | 7m                 |
| <b>C-8A</b>  | -                   | -                  | -                  | -                  |
| <b>B-6A</b>  | 12m                 | 15m                | 21m                | 34m                |
| <b>B-10A</b> | 3m                  | 3m                 | 4m                 | 9m                 |
| <b>B-13A</b> | 2m                  | 2m                 | 3m                 | 6m                 |

\*) Don't forget to consider twice the distance to the load (or cable length) when calculating the total wire length (+ and - wire).

## 25.4. PARALLEL USE TO INCREASE OUTPUT POWER

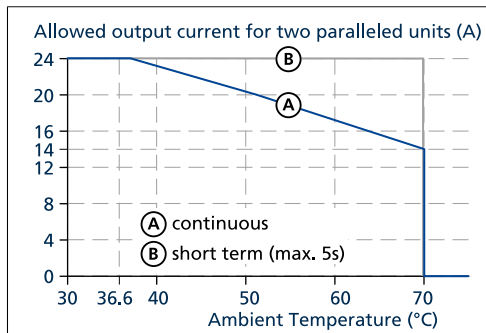


Fig. 25-6: Output current vs. ambient temp. for two paralleled units

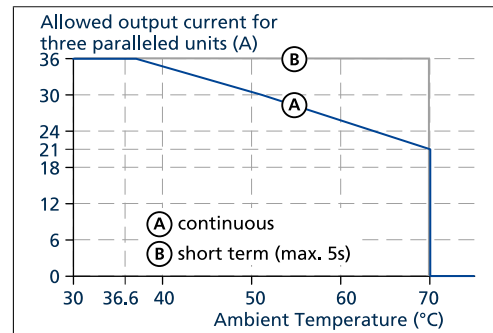


Fig. 25-7: Output current vs. ambient temp. for three paralleled units

## 25.5. PARALLEL USE FOR REDUNDANCY

Power supplies can be paralleled for redundancy to gain higher system availability. The unit is already equipped with a MOSFET as decoupling device on the output to avoid, that a faulty unit becomes a load for the other power supplies and the output voltage cannot be maintained any more.

**Recommendations for building redundant power systems:**

- Use separate input fuses for each power supply.
- Monitor the individual power supply units by utilizing the built-in DC-OK relay contacts on each power supply.

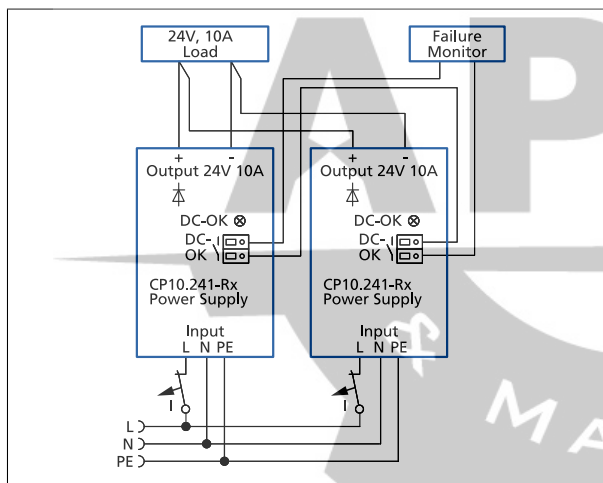


Fig. 25-8: Wiring diagram, 1+1  
Redundancy for 10A output current

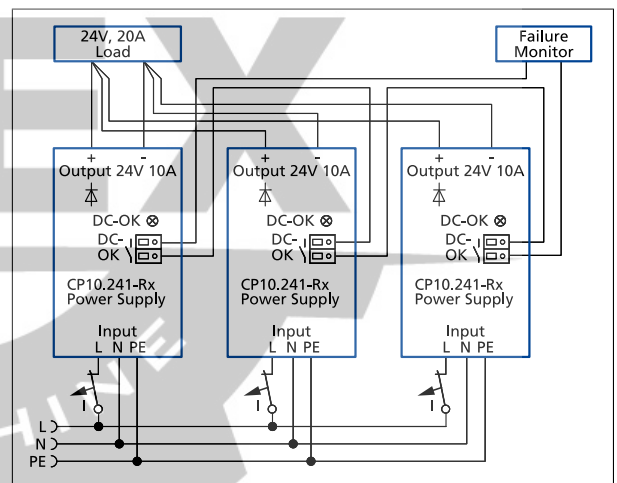


Fig. 25-9: Wiring diagram, N+1  
Redundancy for 20A output current

Observe the temperature derating requirements of Fig. 25-6 and Fig. 25-7 for N+1 redundancy applications.

**Note:** Use separate mains systems for each power supply whenever it is possible.

## 25.6. SERIES OPERATION


Devices of the same type can be connected in series for higher output voltages. It is possible to connect as many units in series as needed, providing the sum of the output voltage does not exceed 150Vdc. Voltages with a potential above 60Vdc are not SELV any more and can be dangerous. Such voltages must be installed with a protection against touching.

Earthing of the output is required when the sum of the output voltage is above 60Vdc.

Avoid return voltage (e.g. from a decelerating motor or battery) which is applied to the output terminals.

Keep an installation clearance of 15mm (left / right) between two power supplies and avoid installing the power supplies on top of each other. Do not use power supplies in series in mounting orientations other than the standard mounting orientation (terminals on the bottom of the unit).

Pay attention that leakage current, EMI, inrush current, harmonics will increase when using multiple power supplies.

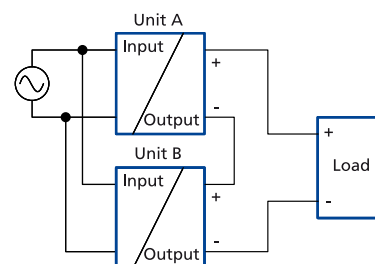

## 25.7. CHARGING OF BATTERIES

This redundancy power supply is ideal for charging batteries due to the decoupling circuit built in to the output stage which does not require a fuse or diode between the power supply and the battery.

It can be used to charge sealed lead acid (SLA) or valve regulated lead acid (VRLA) lead batteries when following these instructions:

### Instructions for charging batteries:


- Set output voltage (measured at no load and at the battery end of the cable) very precisely to the end-of-charge voltage.
- Ensure that the output current of the power supply is below the allowed charging current of the battery.
- Use only matched batteries when putting 12V types in series.
- The return current to the power supply (battery discharge current) is typ. 3mA when the power supply is switched off (except in case a blocking diode is utilized).

|                       |       |       |        |       |
|-----------------------|-------|-------|--------|-------|
| End-of-charge voltage | 27.8V | 27.5V | 27.15V | 26.8V |
| Battery temperature   | 10°C  | 20°C  | 30°C   | 40°C  |

## 25.8. TWO PHASE OPERATION

The power supply can also be operated on two phases of a three-phase-system. Such a phase-to-phase connection is allowed as long as the supplying voltage is below 240V<sup>+10%</sup>.

The maximum allowed voltage between a Phase and the PE must be below 300Vac.

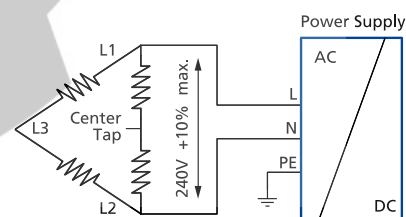


## 25.9. USE IN A TIGHTLY SEALED ENCLOSURE

When the power supply is installed in a tightly sealed enclosure, the temperature inside the enclosure will be higher than outside. In such situations, the inside temperature defines the ambient temperature for the power supply.

The power supply is placed in the middle of the box, no other heat producing items are inside the box. The temperature sensor inside the box is placed in the middle of the right side of the power supply with a distance of 1cm. The following measurement results can be used as a reference to estimate the temperature rise inside the enclosure.

|                             | Case A                                                        | Case B                                                        | Case C                                                        | Case D                                                        |
|-----------------------------|---------------------------------------------------------------|---------------------------------------------------------------|---------------------------------------------------------------|---------------------------------------------------------------|
| Enclosure size              | 110x180x165mm<br>Rittal Typ IP66Box<br>PK 9516 100<br>plastic | 110x180x165mm<br>Rittal Typ IP66Box<br>PK 9516 100<br>plastic | 180x180x165mm<br>Rittal Typ IP66Box<br>PK 9519 100<br>plastic | 180x180x165mm<br>Rittal Typ IP66Box<br>PK 9519 100<br>plastic |
| Input voltage               | 230Vac                                                        | 230Vac                                                        | 230Vac                                                        | 230Vac                                                        |
| Load                        | 24V, 8A; (=80%)                                               | 24V, 10A; (=100%)                                             | 24V, 8A; (=80%)                                               | 24V, 10A; (=100%)                                             |
| Temperature inside the box  | 45.4°C                                                        | 49°C                                                          | 42°C                                                          | 44.4°C                                                        |
| Temperature outside the box | 25°C                                                          | 25°C                                                          | 25°C                                                          | 25°C                                                          |
| Temperature rise            | 20.4K                                                         | 24K                                                           | 17K                                                           | 19.4K                                                         |

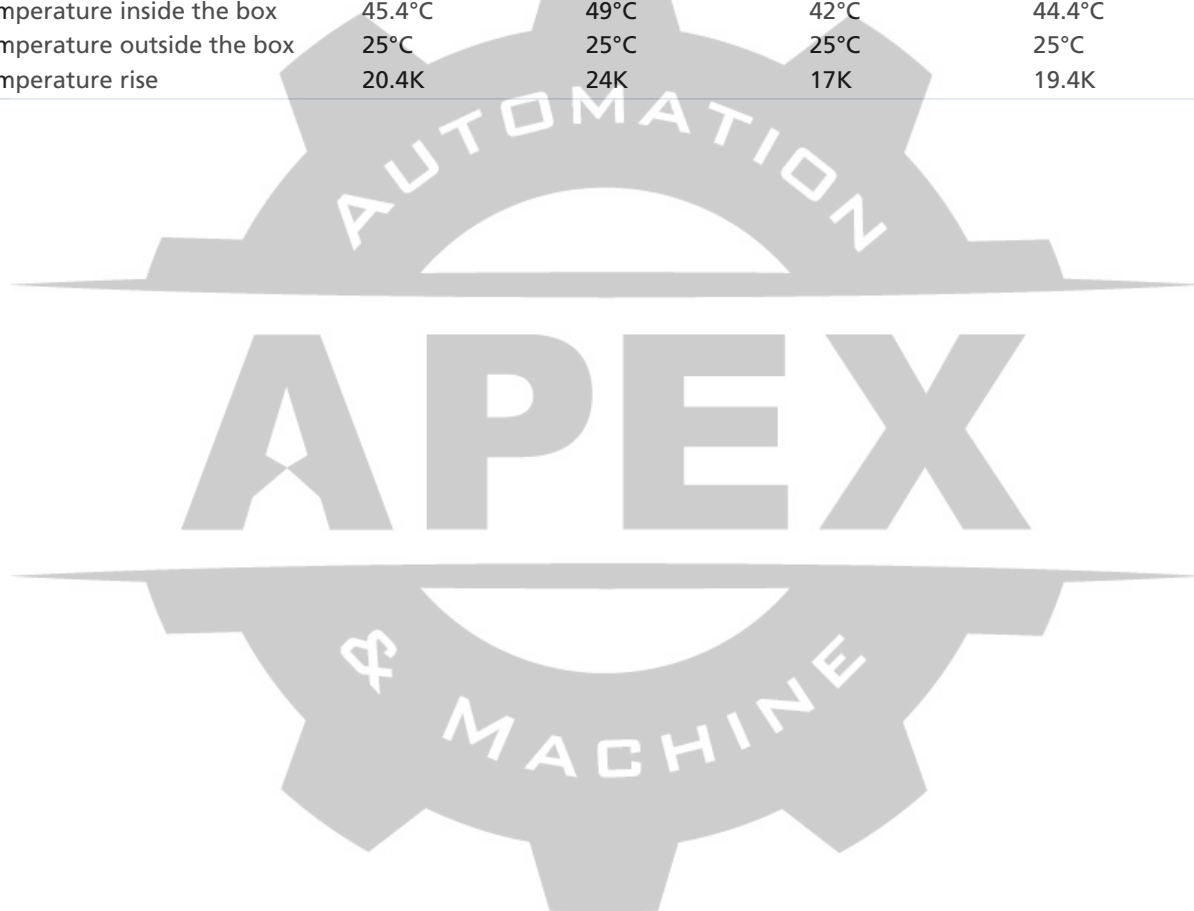

## 25.10. MOUNTING ORIENTATIONS


Mounting orientations other than input terminals on the bottom and output on the top require a reduction in continuous output power or a limitation in the maximum allowed ambient temperature.

The amount of reduction influences the lifetime expectancy of the power supply. Therefore, two different derating curves for continuous operation can be found below:


**Curve A1** Recommended output current.

**Curve A2** Max. allowed output current (results in approximately half the lifetime expectancy of A1).


**A**  
Standard Orientation

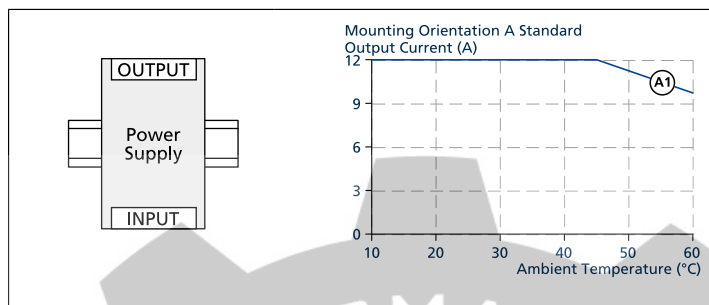


**B**  
Upside down

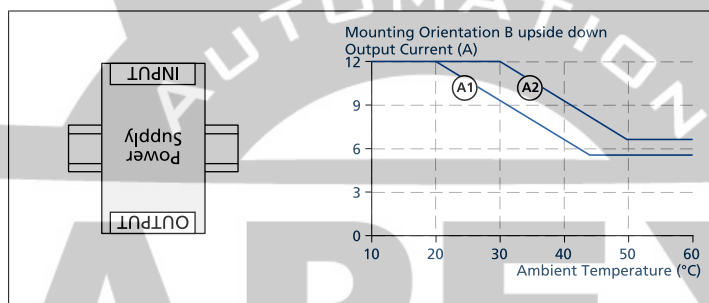


**C**  
Table-top mounting

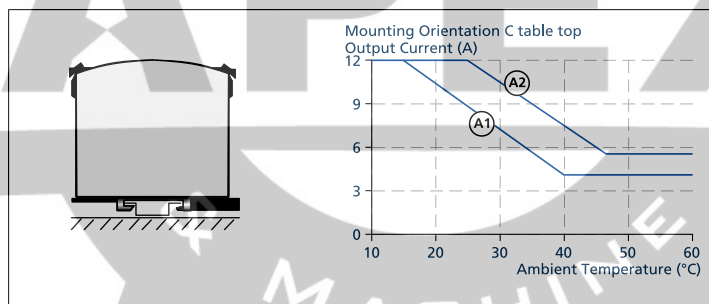

**D**  
Horizontal cw

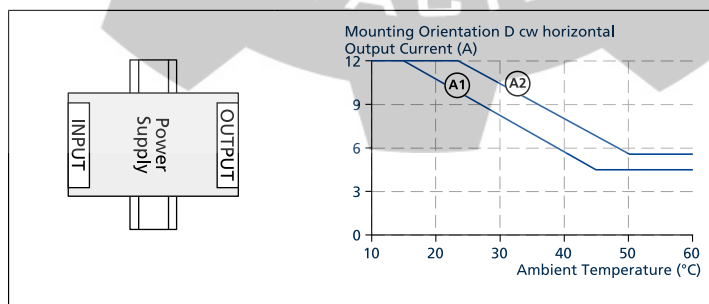

**E**  
Horizontal ccw

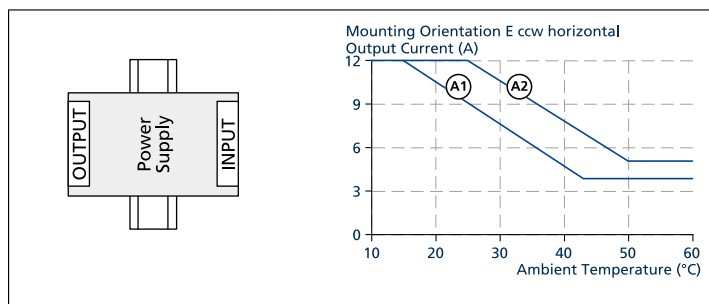

All parameters are specified at 24V, 10A, 230Vac, 25°C ambient and after a 5 minutes run-in time unless otherwise noted.