


F I X E D R E S I L I E N T

SYSTEM FEATURES AND BENEFITS

An anchored sports floor system providing adjustable performance levels, consisting in general of a vapor barrier, pre-manufactured subfloor panels adjusted as specified, anti-squeak collared steel anchors, resilient Rezill pads, maple flooring, sanding, sealers, finishes, game lines, and wall base.

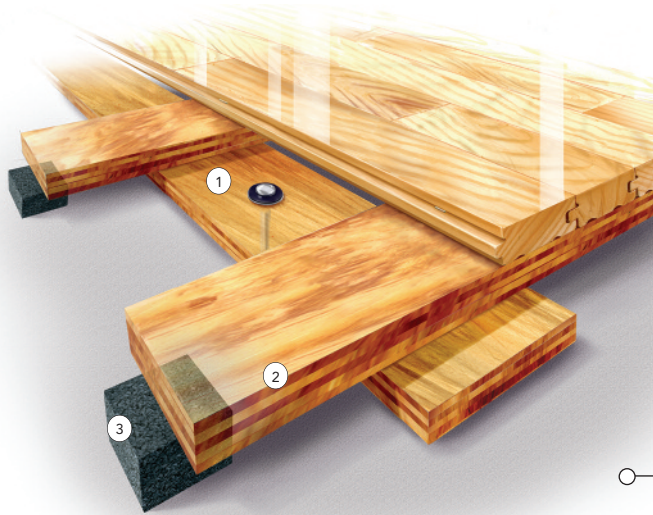

- ① Heavy Duty concrete anchors with Anti-Squeak Collar
- ② Pre-manufactured subfloor assemblies
- ③ Rezill Pads

SPECIFICATIONS

MANUFACTURING

ISO 9001:2000
CERTIFIED

SYSTEM TYPE

Fixed Resilient

ANCHORAGE

Singular Pinned
(Design Group 3)

SUBFLOOR CONSTRUCTION

Sleeper Panel

RESILIENCE

Rezill Pads

RECYCLED CONTRIBUTION



Alliance subfloor system includes components with recycled content

SLAB DEPRESSION

25/32" (20mm) flooring – 2 1/4" (57mm)
33/32" (26mm) flooring – 2 1/2" (64mm)

DIN STATUS



D·I·N

Meets or exceeds all the requirements of DIN 18032, part 2.

TESTING LABORATORY



United States Sports Surfacing Laboratory

CERTIFIED TESTING




Laboratory test equipment calibrated and certified through the ISSS

GREEN STATUS




Managed forests, certification available

WALL BASE DETAIL

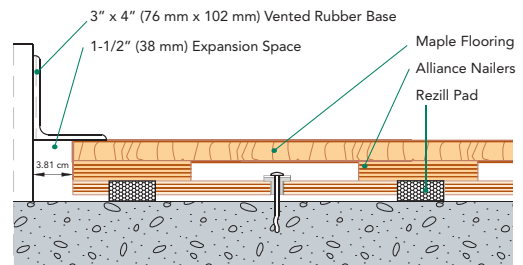

THRESHOLD DETAIL (optional accessory)

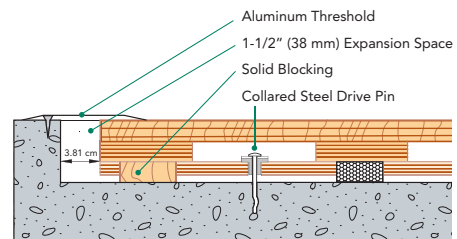

EQUIPMENT DETAIL (optional accessory)

