

Control Modes

- Profile Position-Velocity-Torque, Interpolated Position, Homing
- Camming, Gearing
- Indexer

Command Interface

- CANopen
- ASCII and discrete I/O
- Stepper commands
- $\pm 10V$ position/velocity/torque command
- PWM velocity/torque command
- Master encoder (Gearing/Camming)

Communications

- CANopen
- RS-232

Feedback

- Digital quad A/B encoder
Analog sin/cos incremental
Panasonic Incremental A Format
- SSI, EnDat, Absolute A
Tamagawa & Panasonic Absolute A
Sanyo Denki Absolute A,
BiSS, BiSS
- Aux. encoder / encoder out
- Digital Halls

I/O

- Digital: 11 inputs, 6 outputs
- Analog: 1, 12-bit input

Dimensions: mm [in]

- 76.3 x 58.2 x 20.5 [3.01 x 2.29 x 0.81]

DIGITAL SERVO DRIVE
FOR BRUSHLESS/BRUSH MOTORS

CANopen®



Model	I _c	I _p	V _{dc}
APM-090-06	3	6	14-90
APM-090-14	7	14	14-90
APM-090-30	15	30	14-90



DEVELOPMENT KIT

DESCRIPTION

Accelnet APM is a high-performance, DC powered servo drive for position, velocity, and torque control of brushless and brush motors via CANopen. Using advanced FPGA technology, the APM provides a significant reduction in the cost per node in multi-axis CANopen systems.

The APM operates as an CANopen node using the CANopen over CANopen (CoE) protocol of DSP-402 for motion control devices. Supported modes include: Profile Position-Velocity-Torque, Interpolated Position Mode (PVT), and Homing.

Command sources also include $\pm 10V$ analog torque/velocity/position, PWM torque/velocity, and stepper command pulses.

Feedback from a number of incremental and absolute encoders is supported.

Nine high-speed digital inputs with programmable functions are provided, and a low-speed input for motor temperature switches.

An SLI (Switch & LED Interface) function is supported by another high-speed input and four high-speed digital outputs. If not used for SLI, the input and outputs are programmable for other functions. Two open-drain MOSFET outputs can drive loads powered up to 24 Vdc.

An RS-232 serial port provides a connection to Copley's CME2 software for commissioning, firmware upgrading, and saving configurations to flash memory.

Drive power is transformer-isolated DC from regulated or unregulated power supplies. An AuxHV input is provided for "keep-alive" operation permitting the drive power stage to be completely powered down without losing position information, or communications with the control system.

GENERAL SPECIFICATIONS

Test conditions: Load = Wye connected load: 2 mH + 2 Ω line-line. Ambient temperature = 25°C, +HV = HV_{max}

MODEL	APM-090-06	APM-090-14	APM-090-30	Units	
OUTPUT POWER					
Peak Current	6	14	30	A	DC, sinusoidal
	4.2	10	21	A	RMS, sinusoidal
Peak time	1	1	1	s	Sec
Continuous current	3	7	15	A	DC, sinusoidal
	2.1	5	10.6	A	RMS, sinusoidal
Maximum Output Voltage				V	Vout = HV*0.97 - Rout*Iout
INPUT POWER					
HVmin~HVmax	+14 to +90	+14 to +90	+14 to +90	V	DC, transformer-isolated
Ipeak	6	14	30	A	For 1 sec
Icont	3	7	15	A	Continuous
Aux HV		+14 to +HV Vdc @ 500 mAdc maximum, 2.5 W			
PWM OUTPUTS					
Type	3-phase MOSFET inverter, 16 kHz center-weighted PWM, space-vector modulation				
PWM ripple frequency	32 kHz				
CONTROL MODES					
CANopen: Profile Position/Velocity/Torque, Interpolated Position (PVT), Homing					
Analog ±10 Vdc velocity/torque					
Digital PWM velocity/torque and stepper commands					
Discrete I/O: camming, internal indexer and function generator					
COMMAND INPUTS					
Type	CANopen, galvanically isolated from drive circuits				
Signals	CAN_H, CAN_L, CAN_GND				
Data protocol	CANopen Device Profile DSP-402 over CANopen (CoE)				
Address Selection	Programmable, or via digital inputs				
Analog	±10 Vdc, torque/velocity/position control				
Digital	High speed inputs for PWM/Polarity, Step/Direction, or Quad A/B master encoder				
Camming	Quad A/B digital encoder				
DIGITAL CONTROL					
Digital Control Loops	Current, velocity, position. 100% digital loop control				
Sampling rate (time)	Current loop: 16 kHz (62.5 μs), Velocity & position loops: 4 kHz (250 μs)				
Commutation	Sinusoidal, field-oriented control for brushless motors				
Modulation	Center-weighted PWM with space-vector modulation				
Bandwidth	Current loop: 2.5 kHz typical, bandwidth will vary with tuning & load inductance				
HV Compensation	Changes in bus voltage do not affect bandwidth				
Minimum load inductance	200 μH line-line				
DIGITAL INPUTS					
Number, type	11, 74LVC14 Schmitt trigger, V _{T+} = 1.1~2.2 Vdc, V _{T-} = 0.8~1.5 Vdc, V _{H+} = 0.3~0.45 Vdc				
[IN1~9]	High-speed (HS) digital, 100 ns RC filter, 10 kΩ pull-up to +5 Vdc, +7 Vdc tolerant				
[IN10]	SLI port MISO input, 47 ns RC filter, 10 kΩ pull-up to +5 Vdc				
[IN11]	Motor temperature switch, 330 μs RC filter, 4.99 kΩ pull-up to +5 Vdc				
ANALOG INPUT					
Number	1				
Type	Differential, ±10 Vdc, 12-bit resolution, 5 kΩ input impedance				
DIGITAL OUTPUTS					
Number	6, function programmable (defaults shown below)				
Number	6				
[OUT1~2]	Open-drain MOSFET with 1 kΩ pull-up with series diode to +5 Vdc				
	300 mAdc max, +30 Vdc max. Functions programmable				
[OUT3~6]	SLI port MOSI, SCLK, SS1, & SS2 signals, 74AHCT125 line drivers; +5 Vdc tolerant				
	Output current: -8 mA source @ V _{OH} = 2.4V, 6 mA sink at V _{OL} = 0.5V				
FEEDBACK					
Digital Incremental Encoder	Quadrature signals, (A, /A, B, /B, X, /X), differential (X, /X Index signals not required)				
5 MHz maximum line frequency	(20 M counts/sec)				
26LS32 differential line receiver	with 121 Ω terminating resistor between complementary inputs				
Secondary Incremental Encoder	Single-ended A/B/X signals using digital inputs [IN4,5,6] programmed as secondary encoder				
Analog Incremental Encoder	Sin/cos format (sin+, sin-, cos+, cos-), differential, 1 Vpeak-peak, ServoTube motor compatible				
Absolute:					
SSI	Clock (X, /X), Data (S, /S) signals, 4-wire, clock output from AEP, data returned from encoder				
EnDAT	Clock (X, /X), Data (S, /S), sin/cos (sin+, sin-, cos+, cos-) signals				
Absolute A, Tamagawa Absolute A,	Panasonic Absolute A Format				
	SD+, SD- (S, /S) signals, 2.5 or 4 MHz, 2-wire half-duplex communication				
	position feedback: 13-bit resolution per rev, 16 bit revolution counter (29 bit absolute position data)				
	status data for encoder operating conditions and errors				
BiSS (B&C)	MA+, MA- (X, /X), SL+, SL- (S, /S) signals, 4-wire, clock output from AEP, data returned from encoder				
Encoder power	+5 Vdc ±2% @ 400 mAdc max, current limited to 750 mAdc @ +1 Vdc if output overloaded				

RS-232 PORT

Signals	RxD, TxD, Gnd for operation as a DTE device
Mode	Full-duplex, DTE serial port for drive setup and control, 9,600 to 115,200 Baud
Protocol	ASCII or Binary format

MOTOR CONNECTIONS

Phase U, V, W	PWM outputs to 3-phase ungrounded Wye or delta connected brushless motors, or DC brush motors
Hall U, V, W	Digital Hall signals, single-ended, 1.5 μ s RC filter, 15 k Ω pull-up to +5 Vdc, 74LVC14 Schmitt trigger
Digital Incremental Encoder	Quadrature signals, (A, /A, B, /B, X, /X), differential (X, /X Index signals not required) 5 MHz maximum line frequency (20 M counts/sec) RS-422/RS-485 line receivers with fault detection for open/shorted inputs, or low signal amplitude
Secondary Incremental Encoder	Quad A/B/X signals connect to [IN4,5,6] when inputs are programmed as secondary encoder
Analog Incremental Encoder	Sin/cos format (sin+, sin-, cos+, cos-), differential, 1 V _{peak-peak} X or S input may be firmware configured to latch position or time
SSI	Serial data and clock signals (DATA, /DATA, CLK, /CLK), differential
EnDat 2.1, 2.2	Serial data and clock signals (DATA, /DATA, CLK, /CLK), differential; optionally sin/cos signals
EnDat 2.1,2.2	Serial data and clock signals (DATA, /DATA, CLK, /CLK), differential
Absolute A, Tamagawa Absolute A,	Panasonic Absolute A Format
BiSS (B&C)	SD+, SD- (S, /S) signals MA+, MA-, SL+, SL-
Hall & encoder power	+5 Vdc \pm 2% @ 400 mAdc max, current limited to 750 mAdc @ +1 Vdc if output overloaded
Motemp [IN11]	Motor overtemperature switch input. Active level programmable, 4.99 k Ω pull-up to +5 Vdc Programmable to disable drive when motor over-temperature condition occurs
Voltage range	All inputs shown above are +5 Vdc tolerant

PROTECTIONS

HV Overvoltage	+HV > HV _{max}	Drive outputs turn off until +HV < HV _{max} (See Input Power for HV _{max})
HV Undervoltage	+HV < +14 Vdc	Drive outputs turn off until +HV > +14 Vdc
Drive over temperature	Heat plate > 70°C.	Drive outputs turn off
Short circuits	Output to output, output to ground, internal PWM bridge faults	
I ² T Current limiting	Programmable: continuous current, peak current, peak time	
Motor over temperature	Digital inputs programmable to detect motor temperature switch	
Feedback Loss	Inadequate analog encoder amplitude or missing incremental encoder signals	

MECHANICAL & ENVIRONMENTAL

Size	76.3 x 58.2 x 20.5 [3.01 x 2.29 x 0.81]
Weight	0.27 lb (0.12 kg) without heatsink
Ambient temperature	0 to +45°C operating, -40 to +85°C storage
Humidity	0 to 95%, non-condensing
Vibration	2 g peak, 10~500 Hz (sine), IEC60068-2-6
Shock	10 g, 10 ms, half-sine pulse, IEC60068-2-27
Contaminants	Pollution degree 2
Environment	IEC68-2: 1990
Cooling	Heat sink and/or forced air cooling required for continuous power output

AGENCY STANDARDS CONFORMANCE

In accordance with EC Directive 2004/108/EC (EMC Directive)

EN 55011: 2007	CISPR 11:2003/A2:2006 Industrial, Scientific, and Medical (ISM) Radio Frequency Equipment – Electromagnetic Disturbance Characteristics – Limits and Methods of Measurement Group 1, Class A
EN 61000-6-1: 2007	Electromagnetic Compatibility (EMC) – Part 6-1: Generic Standards – Immunity for residential, Commercial and Light-industrial Environments

In accordance with EC Directive 2006/95/EC (Low Voltage Directive)

IEC 61010-1:2001	Safety Requirements for Electrical Equipment for Measurement, Control and Laboratory Use
------------------	--

Underwriters Laboratory Standards

UL 61010-1, 2nd Ed.: 2004	Safety Requirements for Electrical Equipment for Measurement, Control and Laboratory Use
UL File Number E249894	

CANOPEN


Based on the CAN V2.0b physical layer, a robust, two-wire communication bus originally designed for automotive use where low-cost and noise-immunity are essential, CANopen adds support for motion-control devices and command synchronization. The result is a highly effective combination of data-rate and low cost for multi-axis motion control systems. Device synchronization enables multiple axes to coordinate moves as if they were driven from a single control card.

CANOPEN COMMUNICATION

Accelnet uses the CAN physical layer signals CANH, CANL, and GND for connection, and CANopen protocol for communication. Before installing the drive in a CAN system, it must be assigned a CAN address. A maximum of 127 CAN nodes are allowed on a single CAN bus. Up to seven digital inputs can be used to produce CAN addresses from 1~127, or the address can be saved to flash memory in the module. Address 0 is reserved for the CANopen master on the network. For more information on CANopen communications, download the CANopen Manual from the Copley web-site: CANopen Manual

DIGITAL COMMAND INPUTS

The graphic below shows connections between the APM and a Dsub 9M connector on a CAN card. If the APM is the last node on a CAN bus, the internal terminator resistor can be used by adding a connection on the PC board as shown. The node address of the APM may be set by using digital inputs, or programmed into flash memory in the drive.

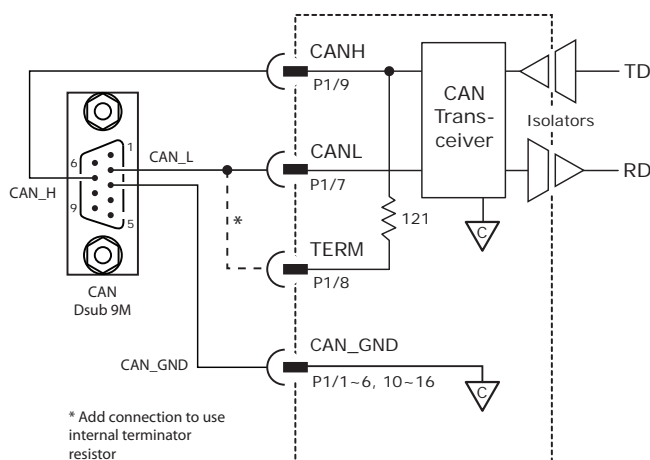

CME2 -> Basic Setup -> Operating Mode Options


Operating Mode:

Command Source:

RS-232 COMMUNICATIONS

APM is configured via a three-wire, full-duplex DTE RS-232 port that operates from 9600 to 115,200 Baud, 8 bits, no parity, and one stop bit. Signal format is full-duplex, 3-wire, DTE using Rx/D, Tx/D, and Gnd. Connections to the APM RS-232 port are through P2. The graphic below shows the connections between an APM and a computer COM port which is a DTE device.

RS232 PORT

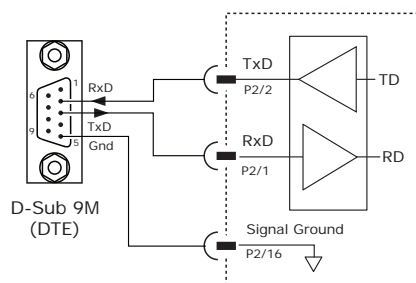

CME2 -> Tools -> Communications Wizard

Communications Wizard

Select device:

☒ Serial Ports

☐ CAN Network


☐ EtherCAT

Next > Cancel

COMMAND INPUTS

ANALOG COMMAND INPUT

The analog input has a ± 10 Vdc range. As a reference input it can take position/velocity/torque commands from a controller.

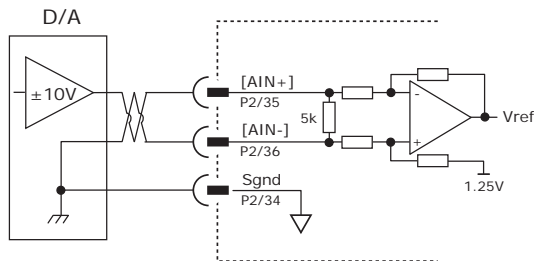

CME2 -> Basic Setup -> Operating Mode Options


Command Source: Analog Command

DIGITAL COMMAND INPUTS


Digital commands are single-ended format and should be sourced from devices with active pull-up and pull-down to take advantage of the high-speed inputs. The active edge (rising or falling) is programmable for the Pulse/Dir and CU/CD formats.

DIGITAL POSITION


PULSE & DIRECTION

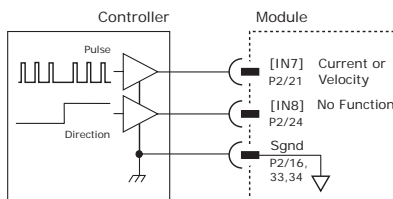

CU/CD

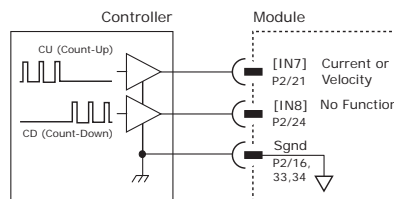

QUAD A/B ENCODER

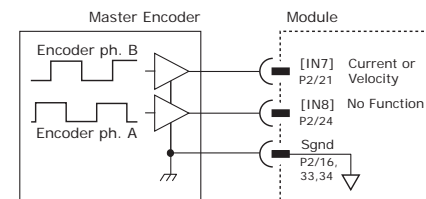

CME2 -> Basic Setup -> Operating Mode Options

Operating Mode: Position

Command Source: Digital Input

CME2 -> Basic Setup -> Operating Mode Options

Control Input:

☒ Pulse and Direction

☐ Pulse Up / Pulse Down

☐ Quadrature

Increment Position on:

☒ Rising Edge

☐ Falling Edge


Stepping Resolution

1 Input Pulses = 1 Output Counts


☐ Invert Command

DIGITAL TORQUE, VELOCITY

PWM & DIRECTION

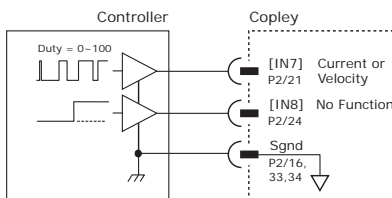

50% PWM

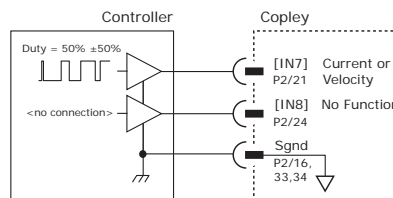

CME2 -> Basic Setup -> Operating Mode Options

Operating Mode: Velocity

Command Source: PWM Command

CME2 -> Main Page -> PWM Command

Scaling: 0 rpm at 100% duty cycle

Input Type:

☒ 50% Duty Cycle

☐ 100% Duty Cycle

☐ Enable Deadband

Deadband: 0 % = 0 rpm

Options:

☐ Invert PWM Input

☐ Allow 100% Output

☐ Invert Sign Input

MOTOR CONNECTIONS

Motor connections consist of: phases, Halls, encoder, thermal sensor, and brake. The phase connections carry the drive output currents that drive the motor to produce motion. The Hall signals are three digital signals that give absolute position feedback within an electrical commutation cycle. The encoder signals give incremental position feedback and are used for velocity and position modes, as well as sinusoidal commutation. A thermal sensor that indicates motor overtemperature is used to shut down the drive to protect the motor. A brake can provide a fail-safe way to prevent movement of the motor when the drive is shut-down or disabled.

QUAD A/B INCREMENTAL ENCODER WITH FAULT PROTECTION

Encoders with differential line-driver outputs provide incremental position feedback via the A/B signals and the optional index signal (X) gives a once per revolution position mark. The MAX3097 receiver has differential inputs with fault protections for the following conditions:

Short-circuits line-line: This produces a near-zero voltage between A & /A which is below the differential fault threshold.

Open-circuit condition: The 121Ω terminator resistor will pull the inputs together if either side (or both) is open. This will produce the same fault condition as a short-circuit across the inputs.

Low differential voltage detection: This is possible with very long cable runs and a fault will occur if the differential input voltage is < 200mV.


± 15kV ESD protection: The 3097E has protection against high-voltage discharges using the Human Body Model.

Extended common-mode range: A fault occurs if the input common-mode voltage is outside of the range of -10V to +13.2V

If encoder fault detection is selected (CME2 main page, Configure Faults block, Feedback Error) and an encoder with no index is used, then the X and /X inputs must be wired as shown below to prevent the unused index input from generating an error for *low differential voltage detection*.

DIGITAL QUADRATURE ENCODER INPUT


5V

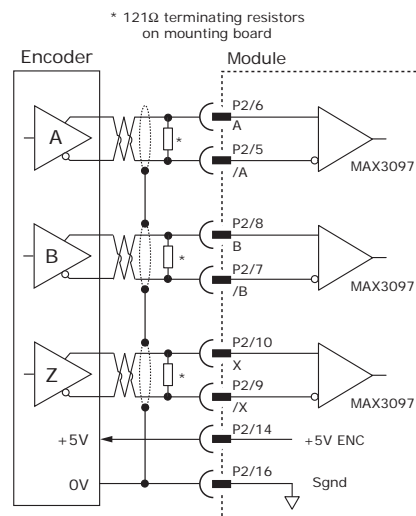

CME2 -> Motor/Feedback -> Feedback

Motor Encoder:

A/B CONNECTIONS (NO INDEX)

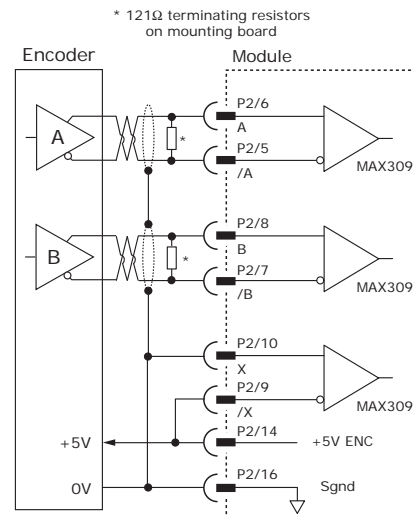


MOTOR CONNECTIONS (CONT'D)


SECONDARY QUAD A/B/X INCREMENTAL ENCODER

Digital inputs [IN4,5,6] can be programmed as secondary encoder inputs. The graphic shows a differential line receiver on the user mounting board to convert typical encoder signals into single-ended ones for the secondary inputs. Single-ended encoders would connect directly to the inputs of the APM.

CME2 -> Basic Setup -> Feedback Options

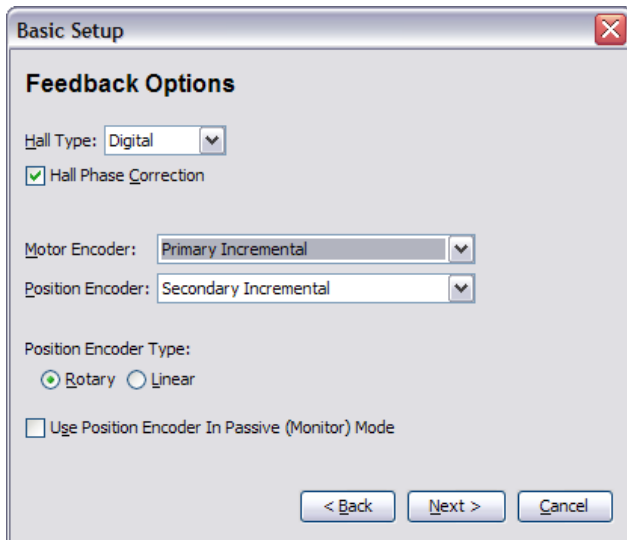


The CME2 screen above shows a Primary Incremental encoder for the motor input. Other types of encoders can be selected for this function. The secondary encoder input can be used for either motor or position feedback.

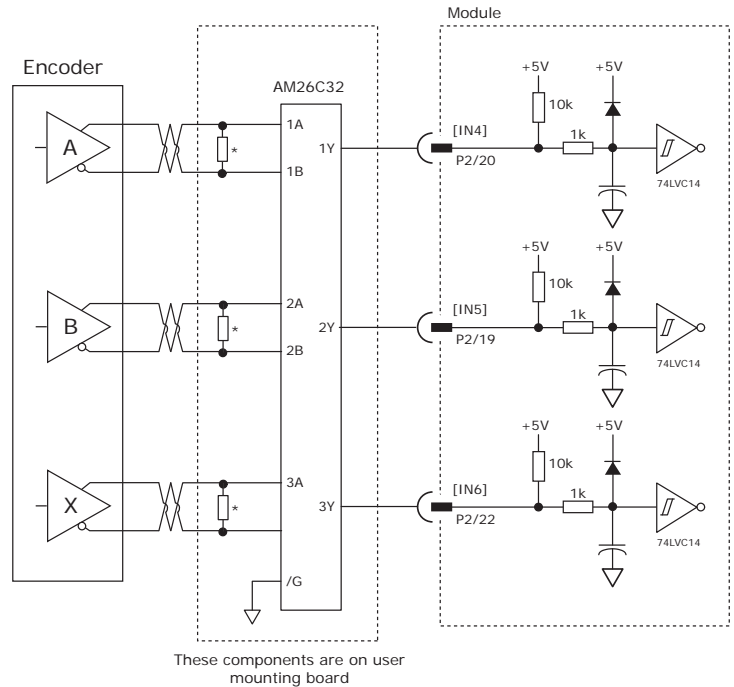

ANALOG SIN/COS INCREMENTAL ENCODER

The sin/cos inputs are differential with 121 Ω terminating resistors and accept 1 Vp-p signals in the format used by incremental encoders with analog outputs, or with [ServoTube](#) motors.

CME2 -> Motor/Feedback -> Feedback

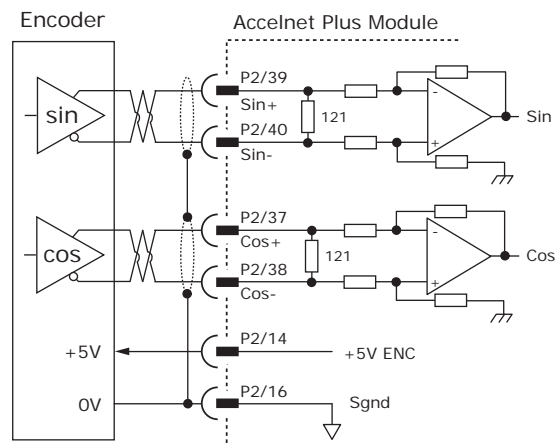


PANASONIC INCREMENTAL A ENCODER

This is a "wire-saving" incremental encoder that sends serial data on a two-wire interface in the same fashion as an absolute encoder.

CME2 -> Basic setup -> Feedback

Bits:

Counts per rev:

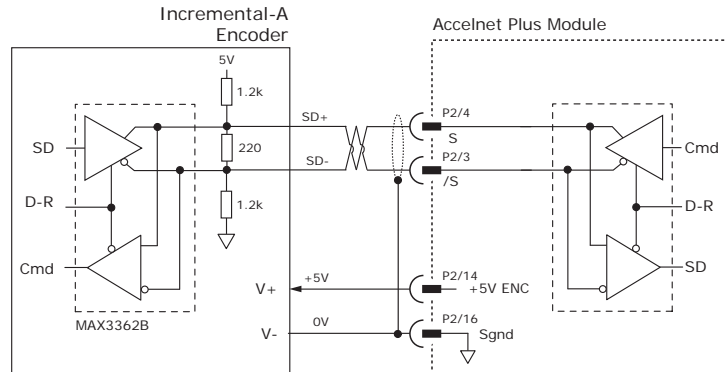

ABSOLUTE A ENCODER, TAMAGAWA, AND PANASONIC


CME2 -> Motor/Feedback -> Feedback

Bits: = counts per rev

Number of Revolutions: turns

Number of Counts Per Rev Bits to Ignore:

Bit Rate: ☒ 2.5 MB/s ☐ 4 MB/s

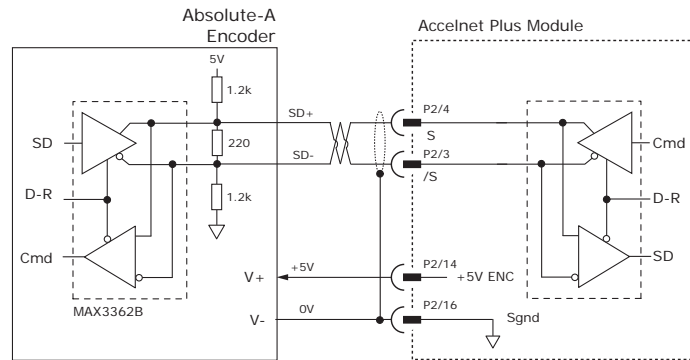

SSI ABSOLUTE ENCODER

The SSI (Synchronous Serial Interface) is an interface used to connect an absolute position encoder to a motion controller or control system. The Accelnet drive provides a train of clock signals in differential format (Clk, /Clk) to the encoder which initiates the transmission of the position data on the subsequent clock pulses. The polling of the encoder data occurs at the current loop frequency (16 kHz). The number of encoder data bits and counts per motor revolution are programmable. Data from the encoder in differential format (Dat, /Dat) MSB first. Binary or Gray encoding is selectable. When the LSB goes high and a dwell time has elapsed, data is ready to be read again.


CME2 -> Motor/Feedback -> Feedback

Motor Encoder

counts per rev

number of Encoder Bits

☒ Binary ☐ Gray

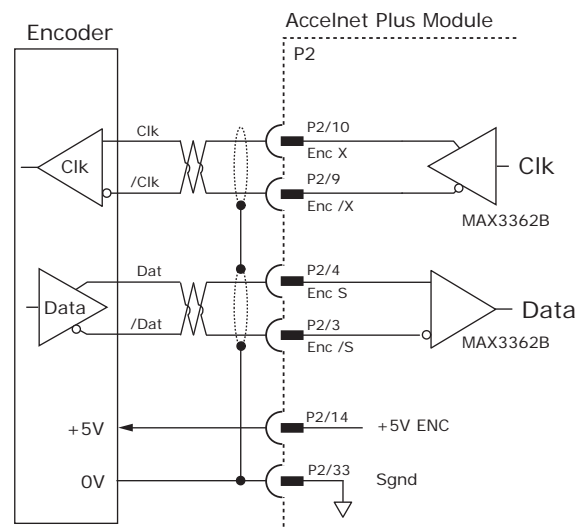


MOTOR CONNECTIONS (CONT'D)

ENDAT ABSOLUTE ENCODER

The EnDat interface is a Heidenhain interface that is similar to SSI in the use of clock and data signals for synchronous digital, bidirectional data transfer. It also supports analog sin/cos channels from the same encoder. The number of position data bits is programmable. Use of sin/cos incremental signals is optional in the EnDat specification.

CME2 -> Motor/Feedback -> Feedback


Bits: = counts per rev
 Number of Revolutions: turns
☐ Enable Incremental 1Vpp sin/cos

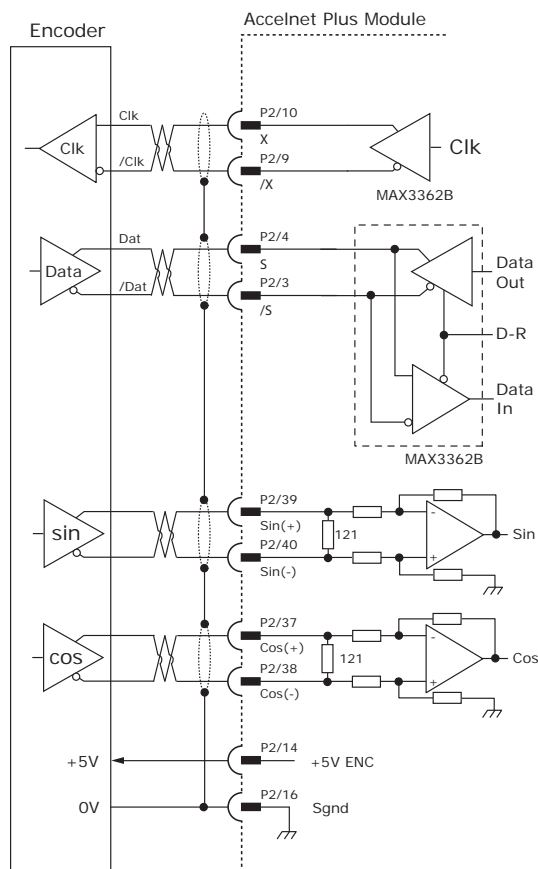

BISS (B & C) ABSOLUTE ENCODER

CME2 -> Motor/Feedback -> Feedback

Bits: = counts per rev
 Number of Revolutions: turns
 Number of Alignment Bits:
☒ BISS B ☐ BISS C

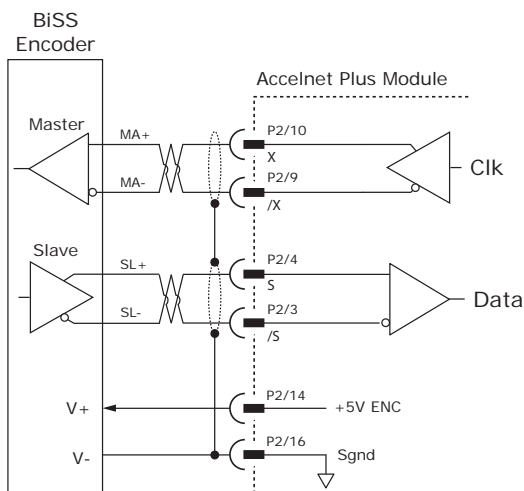

MOTOR CONNECTIONS (CONT'D)

DIGITAL HALL SIGNALS


Hall signals are single-ended signals that provide absolute feedback within one electrical cycle of the motor. There are three of them (U, V, & W) and they may be sourced by magnetic sensors in the motor, or by encoders that have Hall tracks as part of the encoder disc. They typically operate at much lower frequencies than the motor encoder signals, and are used for commutation-initialization after startup, and for checking the motor phasing after the servo drive has switched to sinusoidal commutation.

CME2 -> Basic Setup -> Feedback Options

Hall Type:


☒ Hall Phase Correction

HALL INPUTS 5V

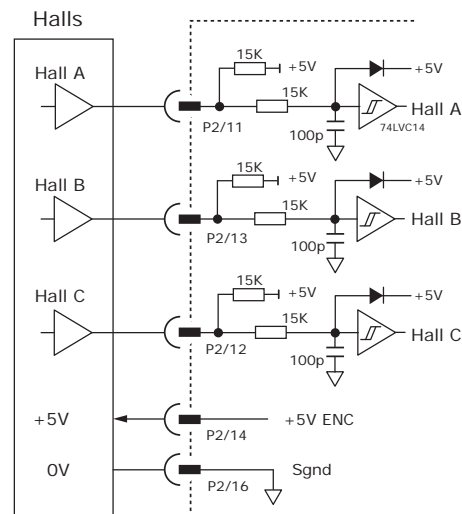

PHASE CONNECTIONS

The drive output is a three-phase PWM inverter that converts the DC bus voltage (+HV) into three sinusoidal voltage waveforms that drive the motor phase-coils. Cable should be sized for the continuous current rating of the drive. Motor cabling should use twisted, shielded conductors for CE compliance, and to minimize PWM noise coupling into other circuits. The motor cable shield should connect to motor frame and the drive HV ground terminal (J2-1) for best results. When driving a DC motor, the W output is unused and the motor connects between the U & V outputs.

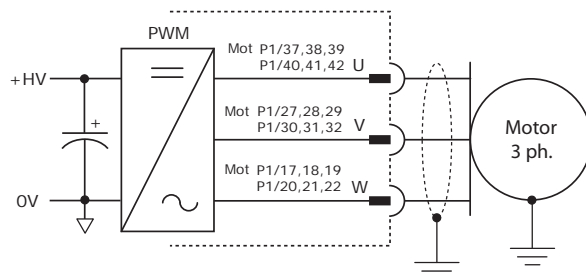

CME2 -> Basic Setup -> Motor Options


Motor Family:

☒ Brushless ☐ Brush

MOTOR OVER TEMP INPUT

The 4.99k pull-up resistor works with PTC (positive temperature coefficient) thermistors that conform to BS 4999:Part 111:1987 (table below), or switches that open/close indicating a motor over-temperature condition. The active level is programmable.


Property	Ohms
Resistance in the temperature range 20°C to +70°C	60~750
Resistance at 85°C	≤1650
Resistance at 95°C	≥3990
Resistance at 105°C	≥12000

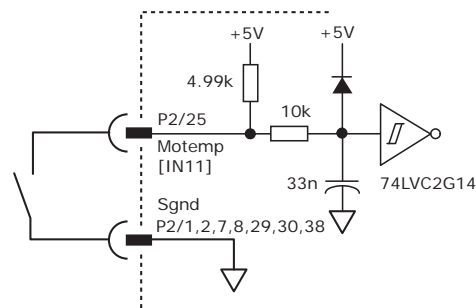

CME2 -> Input / Output

[IN5] 0 ms


CONNECTIONS FOR ABSOLUTE ENCODER WITH DUPLEX CLOCK/DATA

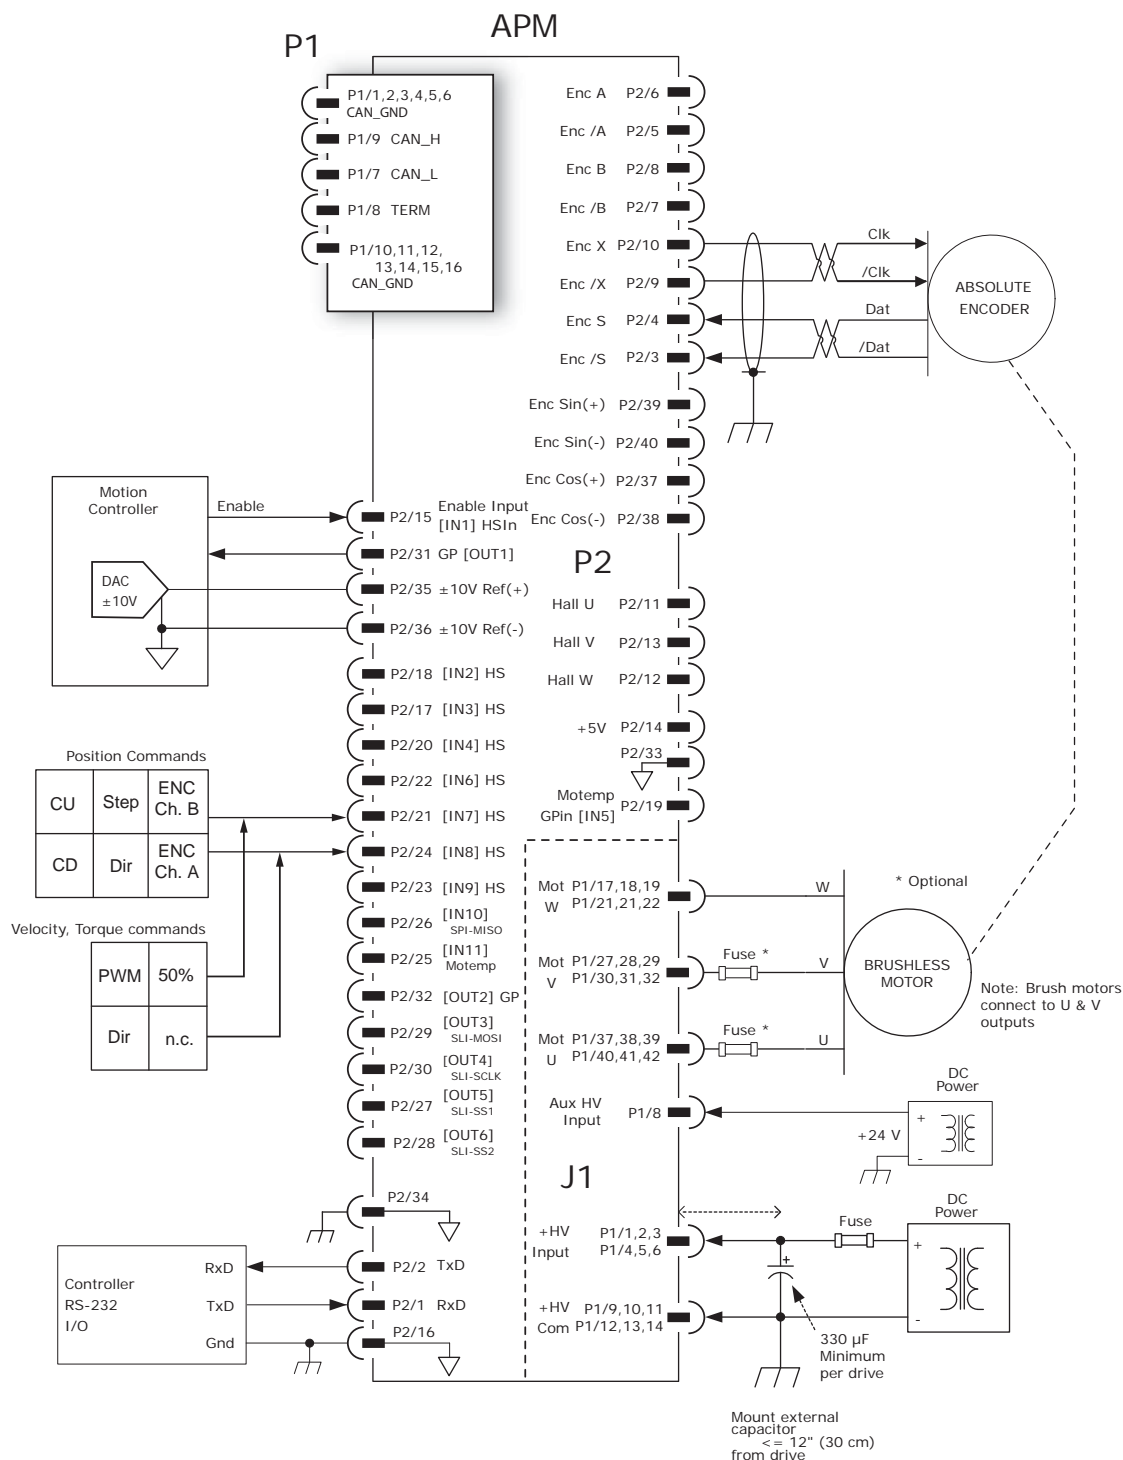

Notes:

1. Encoders with this type of connection include BiSS and SSI.

CONNECTIONS FOR INCREMENTAL DIGITAL OR ANALOG ENCODERS

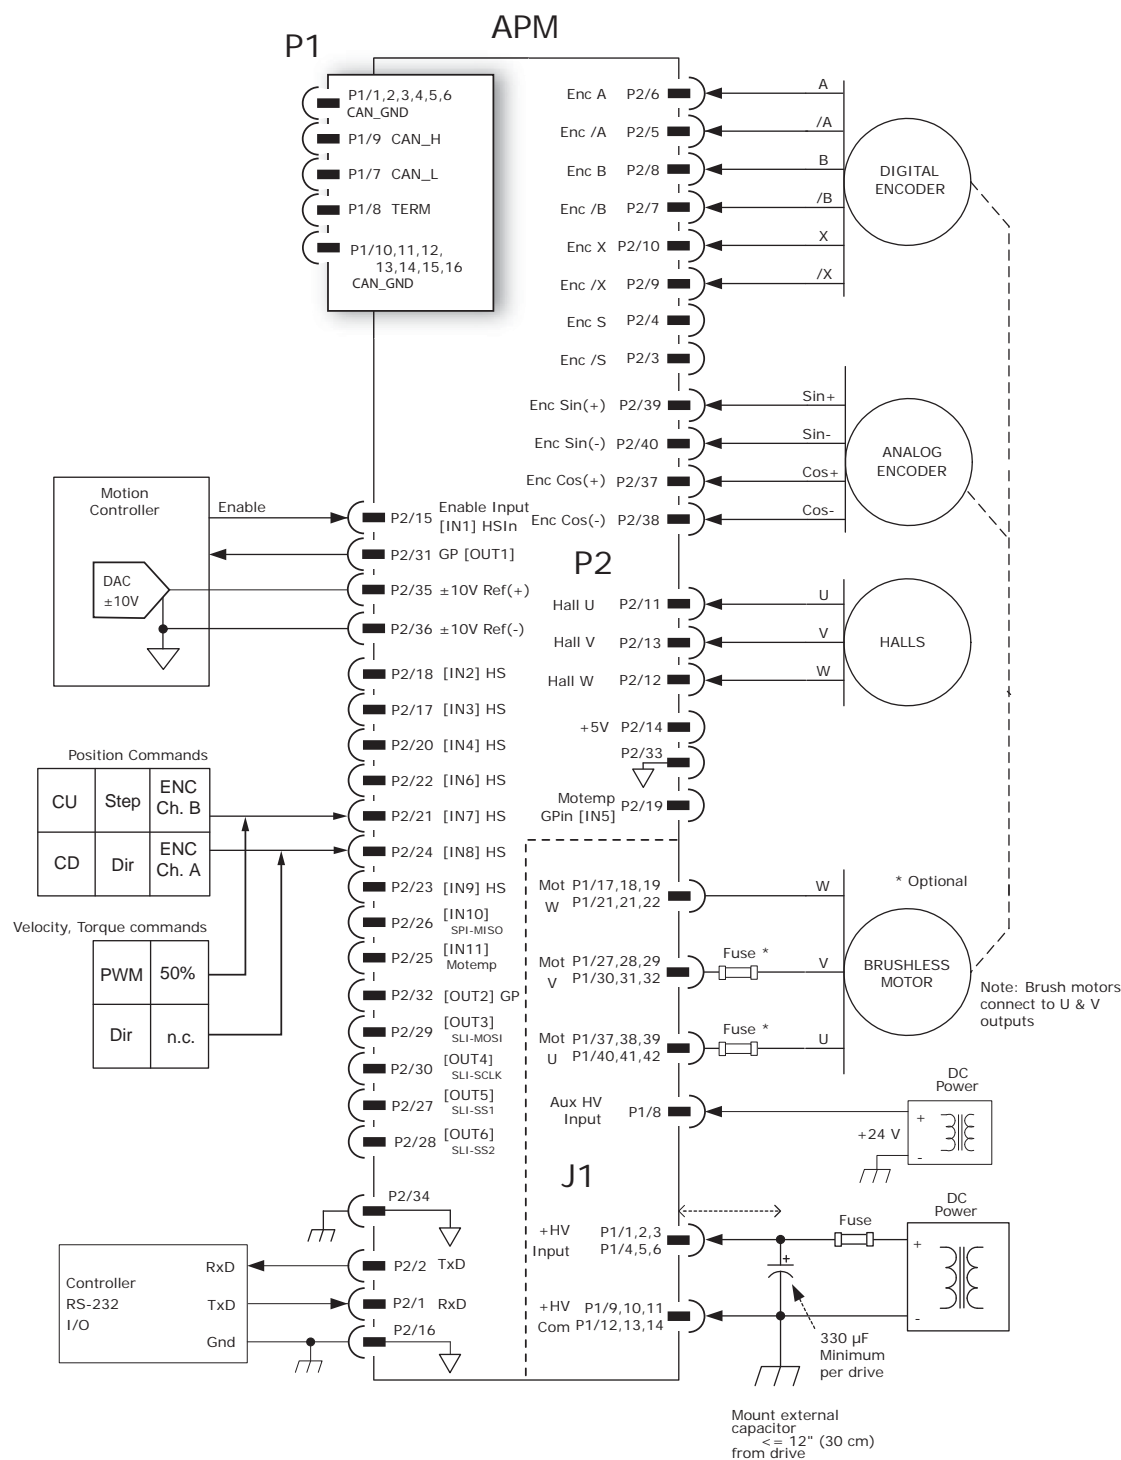

PRINTED CIRCUIT BOARD CONNECTORS & SIGNALS

P1 POWER & MOTOR

Signal	Pin	Signal
+HV	2	+HV
+HV	4	+HV
+HV	6	+HV
Aux HV	8	
HVGnd	10	HVGnd
HVGnd	12	HVGnd
HVGnd	14	HVGnd
	16	
Mot W	18	Mot W
Mot W	20	Mot W
Mot W	22	Mot W
	24	
	26	
Mot V	28	Mot V
Mot V	30	Mot V
Mot V	32	Mot V
	34	
	36	
Mot U	38	Mot U
Mot U	40	Mot U
Mot U	42	Mot U


P1: Power & Motor
Dual row, 2 mm- centers
42 position female header
SAMTEC SQW-121-01-L-D

Notes:

1. P1 connections use multiple pins to share current. *All signals of the same name must be connected* on the PC board to which the APM is mounted.
2. Cells in table above that are filled in grey are connector contacts that have no circuit connections.

TOP VIEW

Viewed from above looking down on the connectors or PC board footprint to which the module is mounted

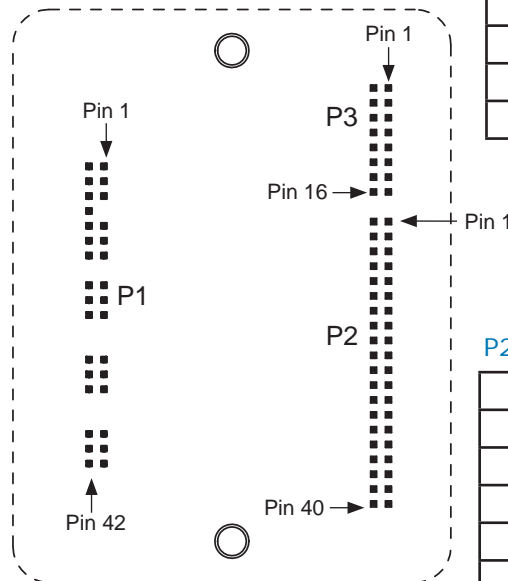

P3 CANOPEN

Signal	Pin	Signal
CAN_GND	2	CAN_GND
CAN_GND	4	CAN_GND
CAN_GND	6	CAN_GND
Term	8	CAN_L
CAN_GND	10	CAN_H
CAN_GND	12	CAN_GND
CAN_GND	14	CAN_GND
CAN_GND	16	CAN_GND

P2: Control
Dual row, 2 mm- centers
16 position female header
SAMTEC SQW-108-01-L-D

P2 CONTROL

Signal	Pin	Signal
RS-232 TxD	2	RS-232 RxD
Enc S	4	Enc /S
Enc A	6	Enc /A
Enc B	8	Enc /B
Enc X	10	Enc /X
Hall W	12	Hall U
+5V ENC	14	Hall V
Sgnd	16	[IN1] HS
HS [IN2]	18	[IN3] HS
HS [IN4]	20	[IN5] HS
HS [IN6]	22	[IN7] HS
HS [IN8]	24	[IN9] HS
MISO [IN10]	26	[IN11] Motemp
[OUT6]	28	[OUT5] SLI-SS1
SLI-SCLK [OUT4]	30	[OUT3] SLI-MOSI
MOSFET [OUT2]	32	[OUT1] MOSFET
Sgnd	34	Sgnd
Ref(-)	36	Ref(+)
Enc Cos(-)	38	Enc Cos(+)
Enc Sin (-)	40	Enc Sin(+)

P2: Control
Dual row, 2 mm- centers
40 position female header
SAMTEC SQW-120-01-L-D


PRINTED CIRCUIT BOARD FOOTPRINT

Dimensions are in. [mm]

TOP VIEW

Viewed from above looking down on the connectors or PC board footprint to which the module is mounted

J1 Signal Grouping for current-sharing See Note 1

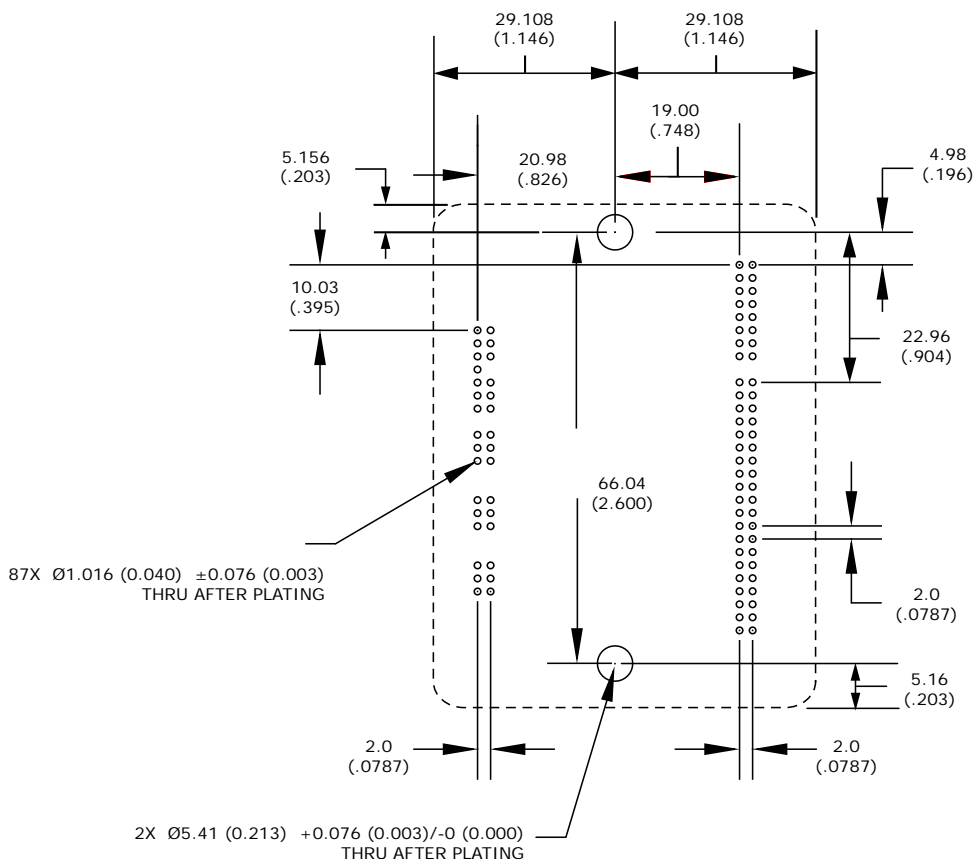

Mounting Hardware:


Qty	Description	Mfgr	Part Number	Remarks
1	Socket Strip	Samtec	SQW-121-01-L-D	J1 HV & Motor
1	Socket Strip	Samtec	SQW-120-01-L-D	J2 Control
1	Socket Strip	Samtec	SQW-108-01-L-D	J3 CANopen
2	Standoff 6-32 X 1/4"	PEM	KFE-632-8ET	

Notes

1. J1 signals of the same name must be connected for current-sharing (see graphic above).
2. To determine copper width and thickness for J3 signals refer to specification IPC-2221. (Association Connecting Electronic Industries, <http://www.ipc.org>)
3. Standoffs should be connected to etches on pc board that connect to frame ground for maximum noise suppression and immunity.

DESCRIPTION


The Development Kit provides mounting and connectivity for one APM drive. Solderless jumpers ease configuration of inputs and outputs to support their programmable functions. Switches can be jumpered to connect to digital inputs 1 ~ 11 so that these can be toggled to simulate equipment operation. Six LED's provide status indication for the digital outputs. Dual CANopen connectors make daisy-chain connections possible so that other CANopen devices such as Copley's Accelnet Plus or Xenus Plus CANopen drives can easily be connected.

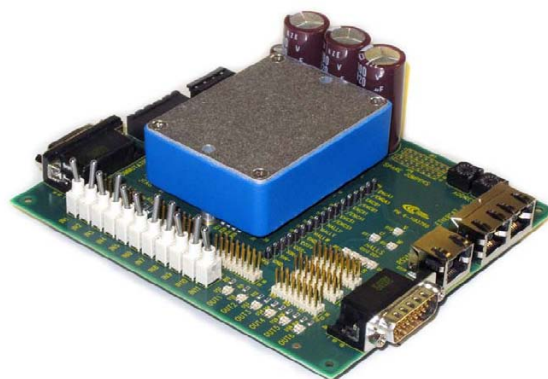

RS-232 CONNECTION


The RS-232 port is used to configure the drive for stand-alone applications, or for configuration before it is installed into an CANopen network. CME 2™ software communicates with the drive over this link and is then used for complete drive setup. The CANopen Slave ID address that is set by the rotary switch can be monitored, and an address offset programmed as well.

The RS-232 connector, J9, is a modular RJ-11 type that uses a 6-position plug, four wires of which are used for RS-232. A connector kit is available (SER-CK) that includes the modular cable, and an adaptor to interface this cable with a 9-pin RS-232 port on a computer.



SER-CK SERIAL CABLE KIT

The SER-CK provides connectivity between a D-Sub 9 male connector and the RJ-11 connector J9 on the Development Kit. It includes an adapter that plugs into the COM1 (or other) port of a PC and uses common modular cable to connect to the Development Kit. The connections are shown in the diagram below.

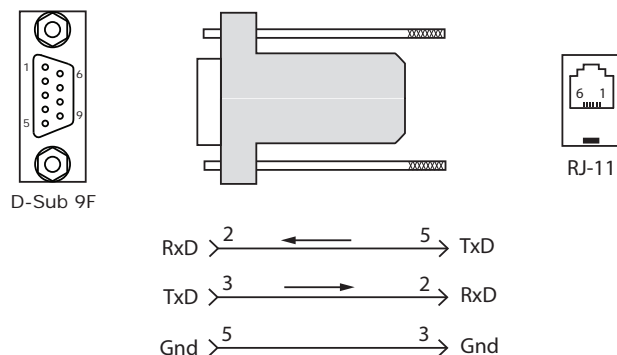


Don't forget to order a Serial Cable Kit SER-CK when placing your order for a Development Kit!

CANOPEN CONNECTORS


Dual RJ-45 connectors that accept standard Ethernet cables are provided for CAN bus connectivity. Pins are wired-through so that drives can be daisy-chained and controlled with a single connection to the user's CAN interface. A CAN terminator should be placed in the last drive in the chain. The XTL-NK connector kit provides a D-Sub adapter that plugs into a CAN controller and has an RJ-45 socket that accepts the Ethernet cable.

J10 CAN CONNECTIONS



APK-NK CAN CONNECTOR KIT


The kit contains the XTL-CV adapter that converts the CAN interface D-Sub 9M connector to an RJ-45 Ethernet cable socket, plus a 10 ft (3 m) cable and terminator. Both connector pin-outs conform to the CiA DR-303-1 specification.

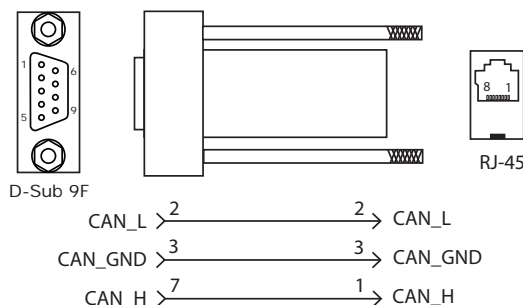

CAN STATUS LED

DRIVE STATE

LED ON-OFF CONDITION

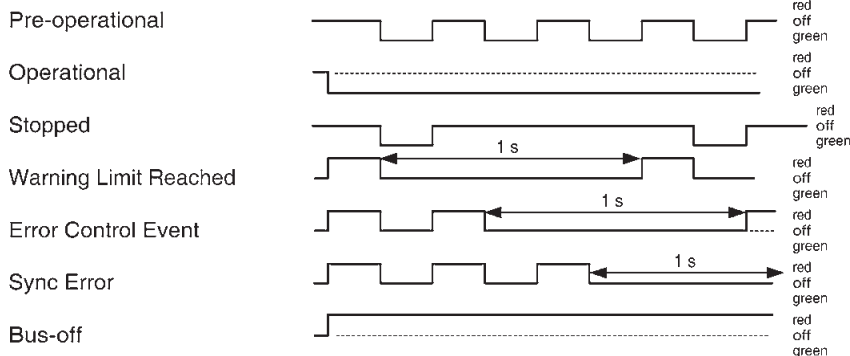

Note: Red & green led on-times do not overlap.
LED color may be red, green, off, or flashing of either color.

DRIVE STATUS LED

A single bi-color LED gives the state of the drive by changing color, and either blinking or remaining solid.

The possible color and blink combinations are:

- **Green/Solid:** Drive OK and enabled. Will run in response to reference inputs or CANopen commands.
- **Green/Slow-Blinking:** Drive OK but NOT-enabled. Will run when enabled.
- **Green/Fast-Blinking:** Positive or Negative limit switch active. Drive will only move in direction not inhibited by limit switch.
- **Red/Solid:** Transient fault condition. Drive will resume operation when fault is removed.
- **Red/Blinking:** Latching fault. Operation will not resume until drive is Reset.

Drive Fault conditions:


- Over or under-voltage
- Motor over-temperature
- Encoder +5 Vdc fault
- Short-circuits from output to output
- Short-circuits from output to ground
- Internal short circuits
- Drive over-temperature

Faults are programmable to be either transient or latching

CANOPEN NODE ADDRESS SWITCH CONNECTIONS

The graphic below shows the connections to the CANopen address switches. These are read after the drive is reset, or powered-on. When changing the settings of the switches, be sure to either reset the drive, or to power it off-on. Outputs [OUT3,4,5] and input [IN10] operate as an SLI (Switch & LED Interface) port which reads the settings on the CANopen address switches, and controls the LEDs on the serial and CANopen port connectors.

The jumpers marked with red "X" should be removed so that SW10, or external connections to the signals do not interfere with the operation of the SLI port.

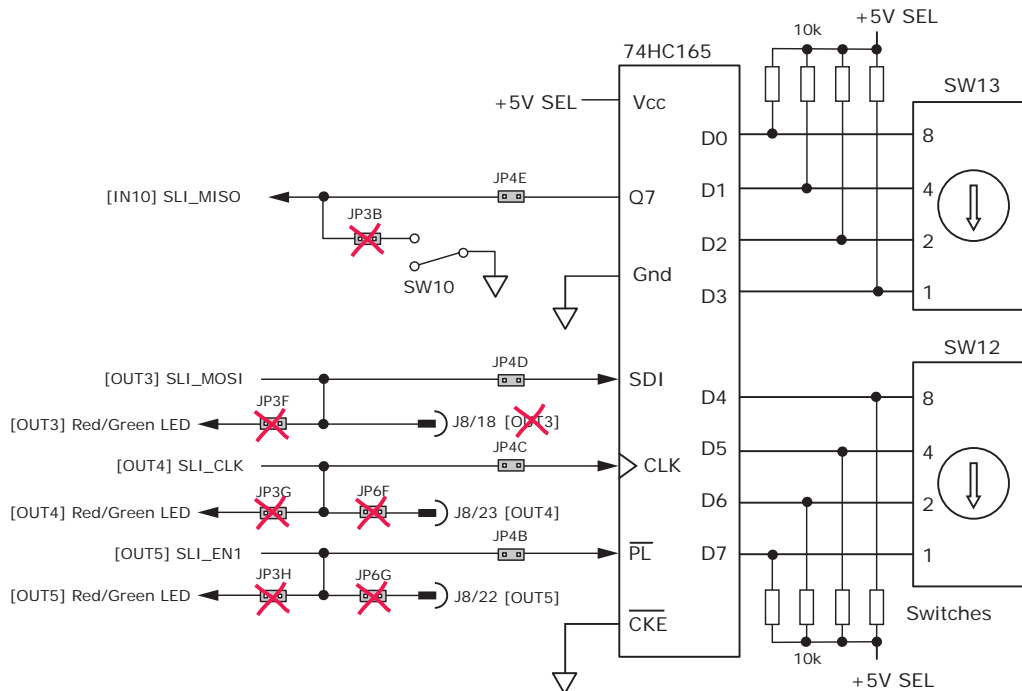

5V POWER SOURCES

The feedback connector J7 has connections for two power supplies:

Pin 6 has +5V supplied by the APM module


Pin 17 connects to jumper J4 for the selection of the 5V power source:

On J4, when the jumper connects pins 2 & 3, the power source is the APM internal supply (the default setting)

When the jumper is on pins 1 & 2, the power source comes from an external power supply connecting to J5-1.

5V power on the Development Kit that comes from the selectable 5V power source on J4 is labeled "5V SEL".

Circuits powered by 5V supplied only by the APM are labeled "5V APM"

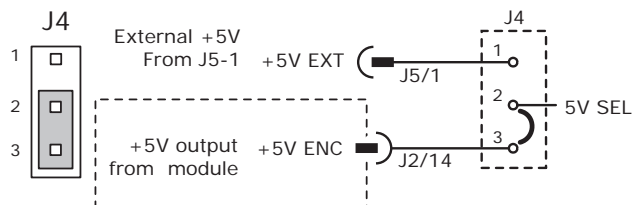


LOGIC INPUTS & SWITCHES

The Development Kit has jumpers that can connect the APM digital inputs to switches on the kit, or to the Signal connector J8.


As delivered, all of these jumpers are installed as shown. If connecting to external devices that actively control the level of an input, it is desirable to disconnect the switch which could short the input to ground.

For example, if [IN1] is connected to an external device for the Enable function, then jumper JP2A should be removed to take the switch SW1 out of the circuit. The figure below shows these connections.

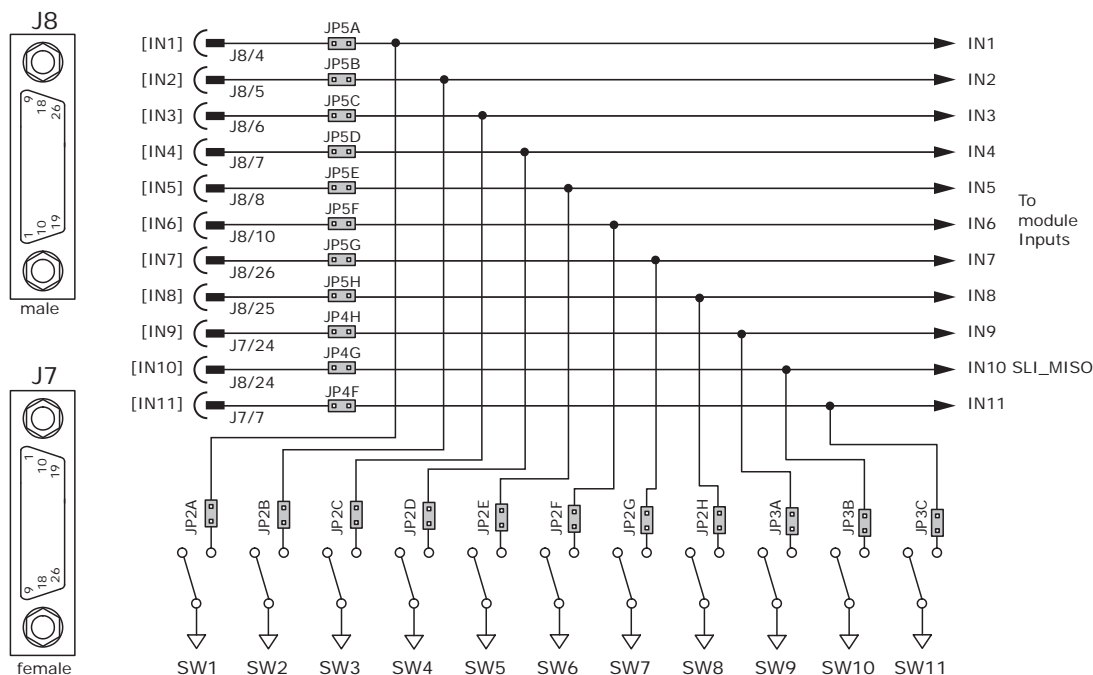

LOGIC OUTPUTS

There are six logic outputs that can drive controller logic inputs or relays. If relays are driven, then flyback diodes must be connected across their terminals to clamp overvoltages that occur when the inductance of the relay coil is suddenly turned off. Outputs 3,4,5 & 6 are CMOS types that pull up to 5V or down to ground. When these outputs go high it turns on the green LED. When they are low, the red LED is turned on. Outputs 1 & 2 are MOSFET types that sink current when ON, and appear as open-circuit when OFF. When these outputs are ON a red LED is turned on. When the outputs are OFF, the red LED is off. The green LED is not used on these outputs.

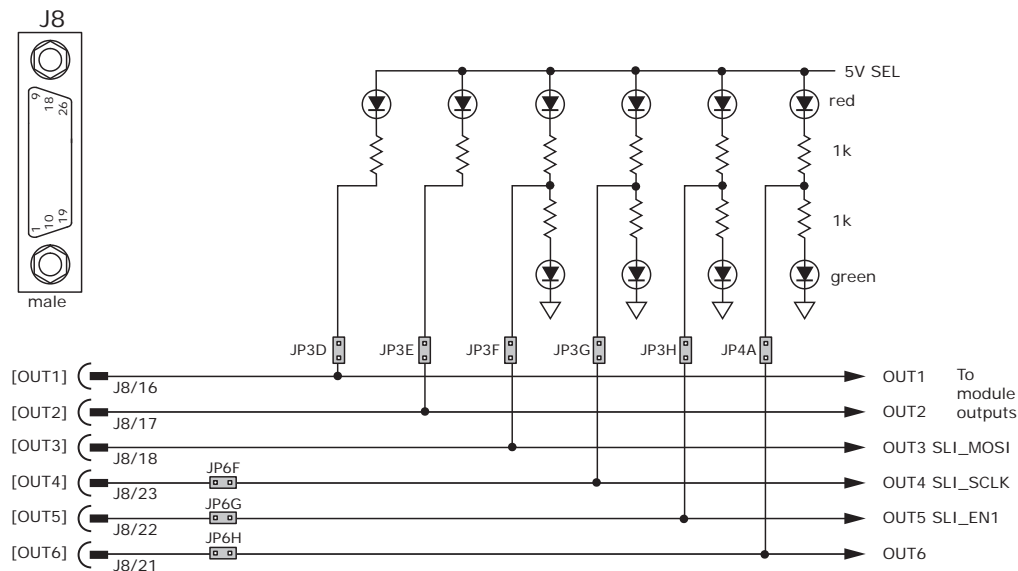

MOTOR FEEDBACK CONNECTOR J7

For motors with differential encoders: install jumpers JP1B, JP1D, JP1F, and JP1H to connect 121 ohm terminators across inputs
Jumpers JP1A, JP1C, JP1E, and JP1G do not affect this setting and may remain in place or be removed.


For motors with single-ended encoders: remove jumpers JP1B, JP1D, JP1F, and JP1H to disconnect 121 ohm terminators
Install jumpers JP1A, JP1C, JP1E, and JP1G


A motor temperature sensor that connects to [IN11] must have jumper JP4F installed and JP3C removed to prevent switch SW11 from grounding the Motemp[IN11] signal.

If the encoder has a fault output, then jumper JP4H must be in place and jumper JP3A must be removed to prevent switch SW9 from grounding the Enc Fault [IN9] signal.

Absolute encoders such as the Nikon A type that use 2-wire bidirectional signals require biasing the lines when they are in a quiescent state. Jumpers JP1G, JP1H, and JP6A must be in place to provide line termination and biasing.

LED's are provided to show the status of the encoder and Hall signals.

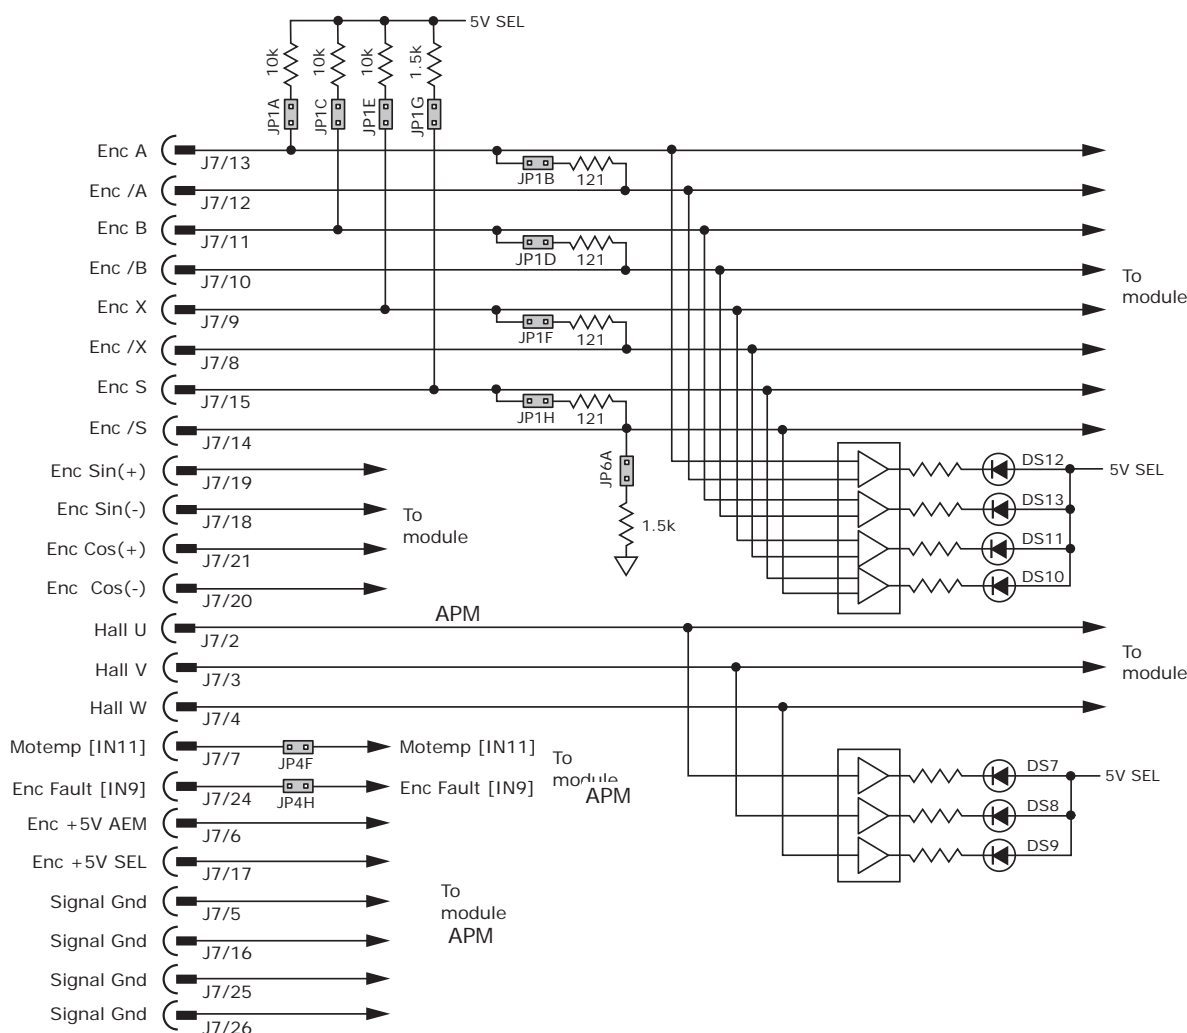

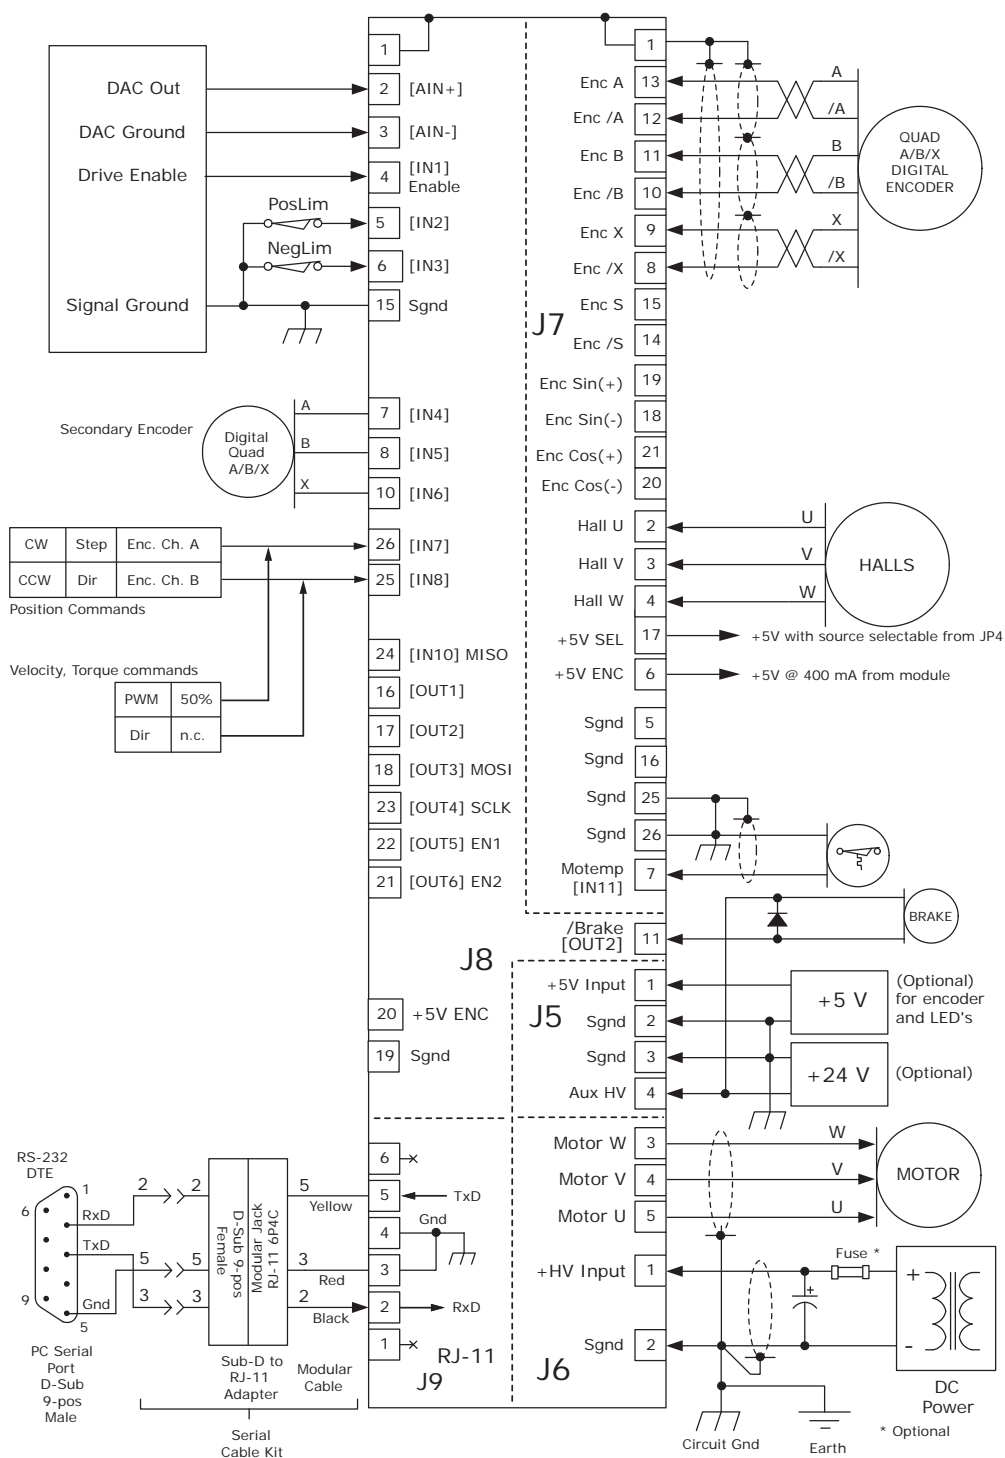

Notes:


1. CANopen connectors J10 are not shown here. For details see pp 4 & 13.

DEVELOPMENT KIT

The Development Kit mounts a single APM module and enables the user to test and operate the APM before it is mounted onto a PC board in the target system.

J6 AUX HV & EXT 5V


Signal	Pin
+5V Ext	1
Gnd	2
Gnd	3
Aux HV Input	4




J5
HV &
Aux

J6 MOTOR


Signal	Pin
+HV Input	1
HV Gnd	2
Motor W	3
Motor V	4
Motor U	5




J6
Motor



J7
Feedback

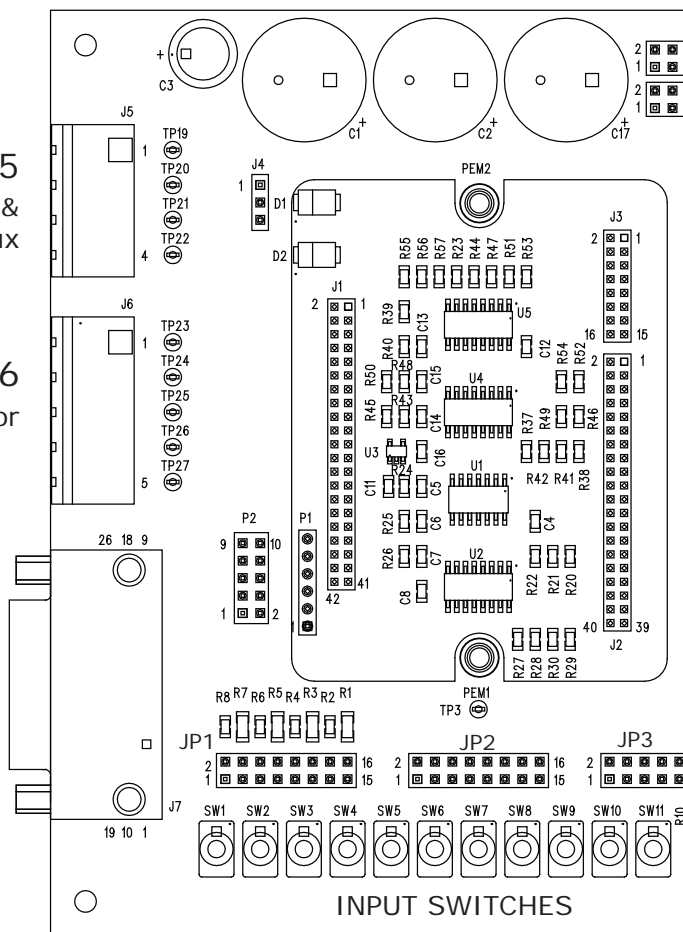

NODE ADDRESS
SWITCHES

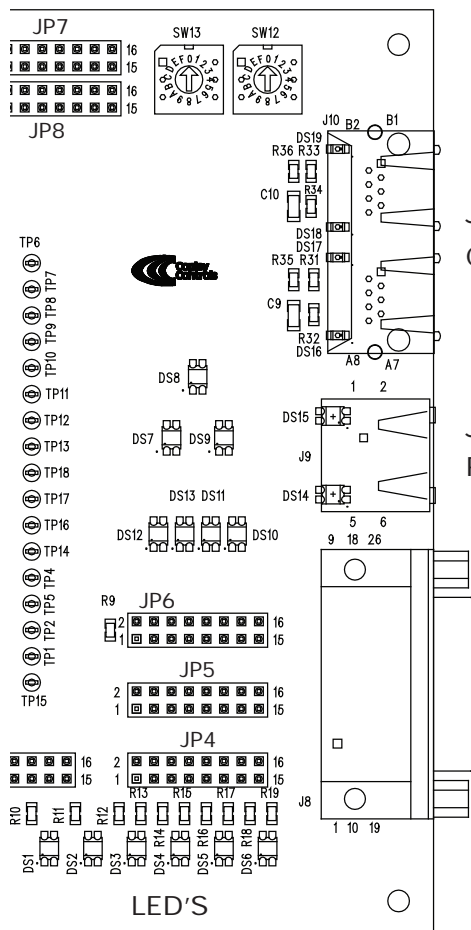

J10
CANopen

J9
RS-232

J8
Control

J10 CANOPEN

Pin	Signal
1	CAN_H
2	CAN_L
3	CAN_GND
4	Pass-thru
5	Pass-thru
6	Pass-thru
7	CAN_GND
8	Pass-thru

J9 RS-232

Pin	Signal
1	n.c.
2	RxD
3	Sgnd
4	Sgnd
5	TxD
6	n.c.




J8 CONTROL

PIN	SIGNAL	PIN	SIGNAL	PIN	SIGNAL
9	n.c.	18	[OUT3] MOSI *	26	[IN7] HS *
8	[IN5] HS *	17	[OUT2]	25	[IN8] HS *
7	[IN4] HS *	16	[OUT1]	24	[IN10] MISO *
6	[IN3] HS *	15	Signal Gnd	23	[OUT4] SCLK *
5	[IN2] HS *	14	n.c.	22	[OUT5] SS1 *
4	[IN1] HS *	13	n.c.	21	[OUT6] SS2 *
3	[AIN-]	12	n.c.	20	+5 Vdc Out
2	[AIN+]	11	n.c.	19	Signal Gnd
1	Frame Gnd	10	[IN6] HS *		

POWER DISSIPATION

The charts on this page show the drive's internal power dissipation for different models under differing power supply and output current conditions. Drive output current is calculated from the motion profile, motor, and load conditions. The values on the chart represent the rms (root-mean-square) current that the drive would provide during operation. The +HV values are for the average DC voltage of the drive power supply.

To see if a heatsink is required or not, the next step is to determine the temperature rise the drive will experience when it's installed. For example, if the ambient temperature in the drive enclosure is 40 °C, and the heatplate temperature is to be limited to 70° C or less to avoid shutdown, the maximum rise would be 70C - 40C. or 30° C. Dividing this dissipation by the thermal resistance of 9° C/W with no heatsink gives a dissipation of 3.33W. This line is shown in the charts. For power dissipation below this line, no heatsink is required. The vertical dashed line shows the continuous current rating for the drive model.

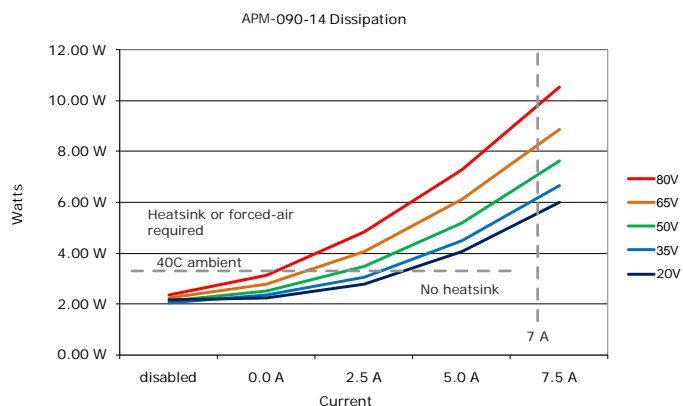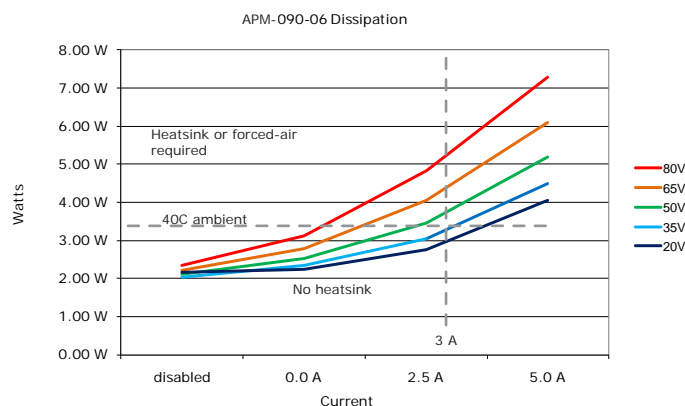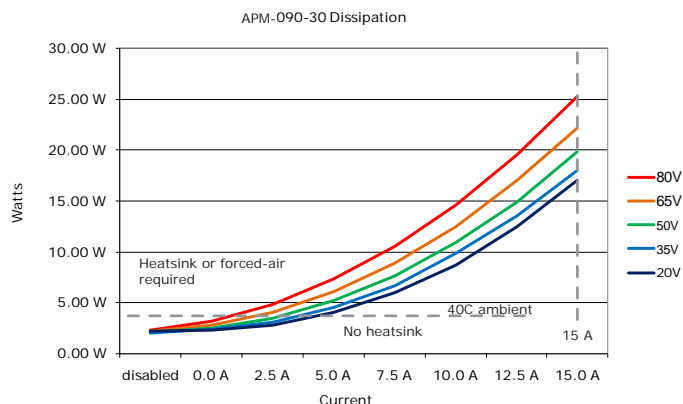


HEATSINK INSTALLATION

If a heatsink is used it is mounted using the same type of screws used to mount the drive without a heatsink but slightly longer. Phase change material (PSM) is used in place of thermal grease. This material comes in sheet form and changes from solid to liquid form as the drive warms up. This forms an excellent thermal path from drive heatplate to heatsink for optimum heat transfer.

STEPS TO INSTALL

1. Remove the PSM (Phase Change Material) from the clear plastic carrier.
2. Place the PSM on the Accelnet aluminum heatplate taking care to center the PSM holes over the holes in the drive body.
3. Mount the heatsink onto the PSM again taking care to see that the holes in the heatsink, PSM, and drive all line up.
4. Torque the #4-40 mounting screws to 3~5 lb-in (0.34~0.57 N·m).

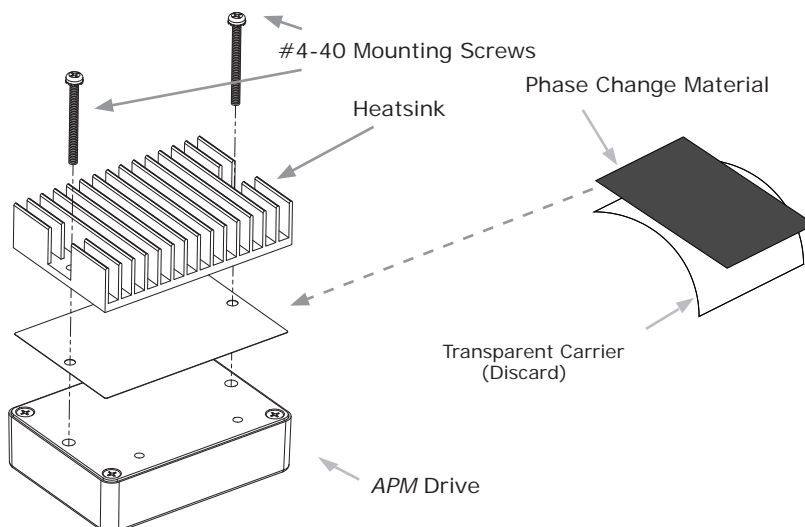

HEATSINK OPTIONS


R_{th} expresses the rise in temperature of the drive per Watt of internal power loss. The units of R_{th} are °C/W, where the °C represent the rise above ambient in degrees Celsius. The data below show thermal resistances under convection, or fan-cooled conditions for the no- heatsink, and APM-HS heatsink.

NO HEATSINK



NO HEATSINK	C/W
CONVECTION	9.1
FORCED AIR (300 LFM)	3.3

STANDARD HEATSINK (APM-HK)

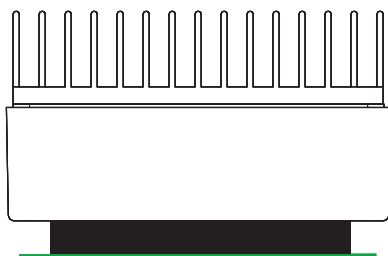

WITH HEATSINK	C/W
CONVECTION	5.3
FORCED AIR (300 LFM)	1.1

MASTER ORDERING GUIDE


APM-090-06	Accelnet APM servo drive, 3/6 A, 90 Vdc
APM-090-14	Accelnet APM servo drive, 7/14 A, 90 Vdc
APM-090-30	Accelnet APM servo drive, 15/30 A, 90 Vdc
APK-090-01	Development Kit for APM servo drive

ACCESSORIES

	QTY	DESCRIPTION
Connector Kit for Development Kit APK-CK-01	1	Connector, Euro, 5 Terminal, 5.08 mm
	1	Connector, Euro, 4 Terminal, 5.08 mm
	1	26 Pin Connector, High Density, D-Sub, Male, Solder Cup
	2	26 Pin Connector, High Density, D-Sub, Female, Solder Cup
	1	26 Pin Connector Backshell
CANopen Network Kit APK-NK	1	Adapter Assy, DB9 Female to RJ45 Jack (APK-CV)
	1	CANopen Network Cable, 10 ft. (APK-NC-10)
	1	CANopen Network Terminator (APK-NT)
Heatsink Kit APM-HK	1	Heatsink for APM
	1	Heatsink Thermal Material
	4	Heatsink Hardware
APK-CV		Adapter Assembly, DB9 Female to RJ45 Jack
APK-NC-10		CANopen Network Cable, 10 ft
APK-NC-01		CANopen network cable, 1 ft
APK-NT		CANopen Network Terminator
CME 2		CME 2 Drive Configuration Software on CD-ROM
SER-CK		Serial Cable Kit

DIMENSIONS

Dimensions: mm [in]

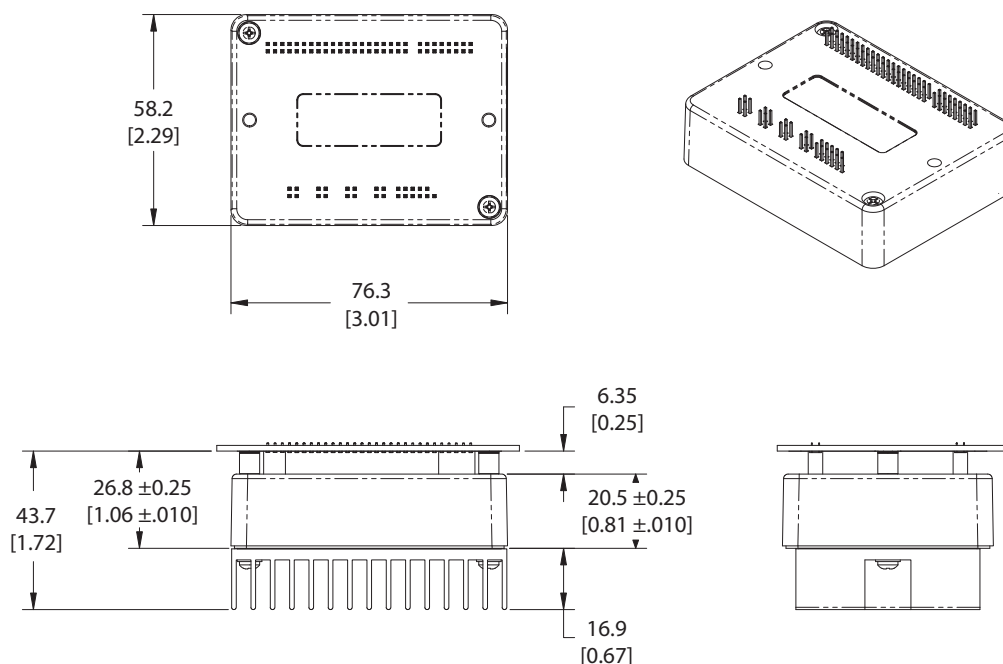

Note: Specifications subject to change without notice

Rev 8.03_tu 01/03/2012