


MAX[™] PORTAFLOOR[®] MAX MATTING AND LOCKING SYSTEMS

TEMPORARY ROADWAY AND RIG MATTING SYSTEM

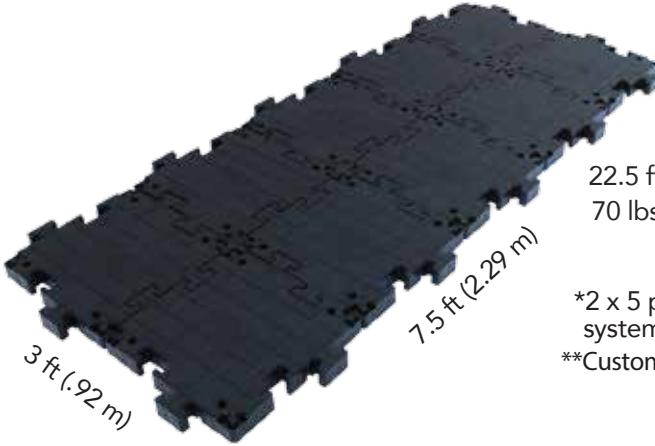

22.5 ft² (2.09 m²)
70 lbs (31.75 kg)

*2 x 5 panel matting system shown
**Custom sizes available

LOGISTICS: More sq. ft. per truckload than any other heavy-duty matting.

INSTALLATION: Quickly reconfigurable by hand or machine on site.

LOW MAINTENANCE: Replaceable, washable, reduces on site dust.

STRENGTH: Supports 80,000 lbs psf/ 600+ psi. (390,594 kgf/m²)

WEIGHT: 65% lighter than other heavy-duty matting.

ZERO FOOTPRINT: Reusable and recyclable.

MATERIALS: Recycled materials and chemical resistant.

CUSTOM SIZES: Standard and custom sizes available.

CUSTOM COLORS: Standard black, custom colors available.


IDENTIFIABLE AND TRACEABLE: Optional identification available on each mat.

LOCKING SYSTEMS

MAX Matting is designed to float and contour over most sub base surfaces. There are times when application and safety may require the MAX matting to be locked together to form one contiguous surface. PortaFloor provides options to meet your application.



MAX Quick Locks: Quick Locks easily lock in to place with a simple "stomp and install" method. These locks secure panels together on a slightly uneven, prepared sub base.



MAX Super Locks: Super Locks secure the MAX matting from above and below the matting surface. They are quickly secured in place and are removable. Super Locks are best used on uneven sub bases and increases safety when connecting mat to mat.