

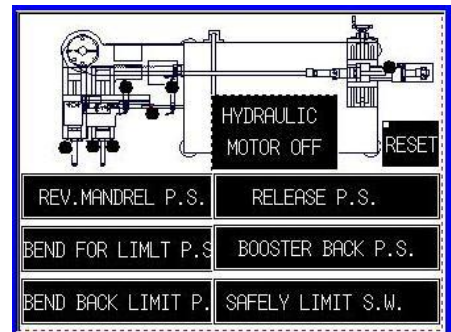
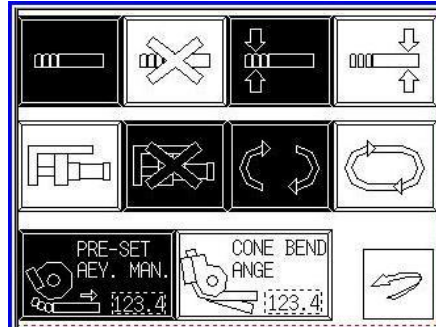


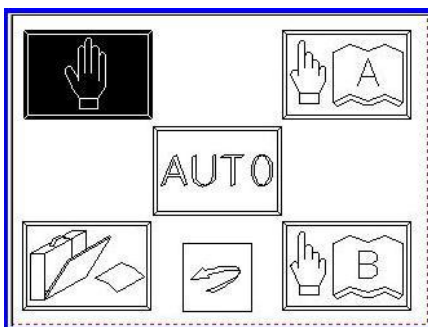

SHUZ TUNG MACHINERY INDUSTRIAL CO., LTD.

NO.1325, CHUNG SHAN RD., SECTION 1, TACHIA TOWN, TAICHUNG HSIEN, TAIWAN, R.O.C.
FACTORY:NO, 17-1, HOU LIAO ROAD, TATUNG TSUN, WAIPU HSIANG, TAICHUNG HSIEN, TAIWAN,
TEL:886-4-26831886 FAX:886-4-26836158 E-MAIL: stmc@shuztung.com.tw

NC BENDERS – NCB150

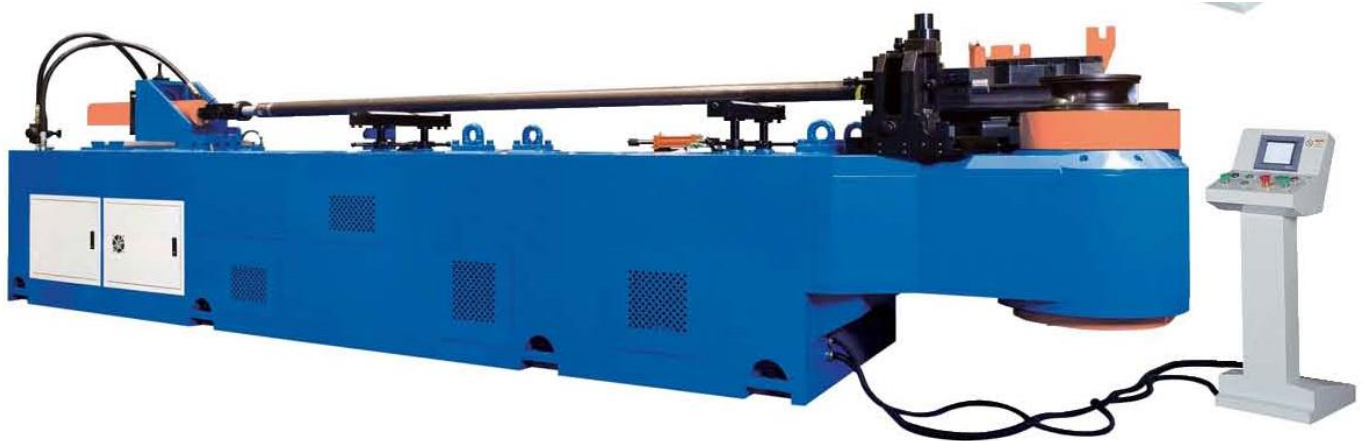

- 1.) Designed with strong clamping and bending capacities for mass production requirements.
- 2.) PLC-BASED digital control for setting single or multiple degree bends.
- 3.) Equipped with user-friendly touch screen for easy operation.
- 4.) Displayed alarm conditions on the screen for trouble-shooting.
- 5.) Able to select parameter options for mandrel pre-reverse, booster (option) and spring back angles.
- 6.) Overhead tie-bar equipped.



SHUZ TUNG MACHINERY INDUSTRIAL CO., LTD.

NO.1325, CHUNG SHAN RD., SECTION 1, TACHIA TOWN, TAICHUNG HSIEN, TAIWAN, R.O.C.
FACTORY:NO, 17-1, HOU LIAO ROAD, TATUNG TSUN, WAIPU HSIANG, TAICHUNG HSIEN, TAIWAN,
TEL:886-4-26831886 FAX:886-4-26836158 E-MAIL: stmc@shuztung.com.tw

SPECIFICATION

HORSE POWER	37.5HP
MAX. BENDING CAPACITY	Ø150 x8.0MM
MAX. BENDING RADIUS (CLR)	600MM
MAX. BENDING ANGLE	190°
LENGTH OF MANDREL	5000MM
BENDING SPEED	8°/SEC.
BENDING ACCURACY	± 0.1°
NUMBER OF PROGRAM	99
BENDING NUMBER	20/PROGRAM
MOLD HEIGHT	NO LIMITED
DIMENSION (CM)	755 x 225 x 170
WEIGHT (KG)	16000