




## LD10 Flashlight

Fenix LD10 is an outdoor flashlight for multiple uses, it combines high brightness and long runtime with 4 lighting levels and 2 flashing outputs for constant brightness. Its portable, compact size and the water-proofing of the IPX-8 standard make the LD10 a dependable flashlight for your lighting applications plus emergency use.

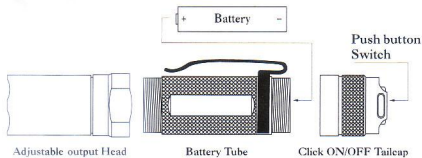

### Features

- ⦿ Cree XP-G LED (R4) with lifespan of 50,000 hours
- ⦿ Two modes (6 types) of output, generation/turbo selected by turning the bezel (patented)
  - General Mode: 9 lumens (34hrs) -> 50 lumens (6hrs) -> 105 lumens (2.2hrs) -> SOS
  - Turbo Mode: 132 lumens (1.5hrs) -> Strobe
- ⦿ Digitally regulated output - maintains constant brightness
- ⦿ Uses one 1.5V AA ( Ni-MH, Alkaline ) batteries, inexpensive and widely available
- ⦿ 100mm (Length) x 21.5mm (Diameter)
- ⦿ Made of durable aircraft-grade aluminum
- ⦿ Premium Type III hard-anodized anti-abrasive finish
- ⦿ 54-gram weight (excluding batteries)
- ⦿ Waterproof to IPX-8 Standard
- ⦿ Toughened ultra-clear glass lens with anti-reflective coating
- ⦿ Push-button tail cap switch
- ⦿ Capable of standing up securely on a flat surface to serve as a candle
- ⦿ Anti-roll, slip-resistant body design
- ⦿ Included accessories: holster, lanyard, body clip, two spare o-rings, and a rubber switch boot

The above-mentioned parameters are approximate and may vary between flashlights, batteries, and environments

### Operation

Fully press (click) to switch on and turn the bezel to select the General Mode or the Turbo Mode. A soft-press (no click) anytime while the light is on will change the brightness levels of a certain mode. Keep the light off for

over 2 seconds and the light will turn completely off, restoring the regulation circuit to the default setting.

### Battery Replacement

Unscrew the tail cap to insert the batteries with the anode side (+) toward the lights head, screw the tail cap back on to test.



# LD10

Max 132 Lumens

## Usage and Maintenance

⦿ Please don't disassemble the sealed head, doing so can cause damage to the flashlight and will void the warranty.

⦿ High-power light should use battery with high current discharge ability, we suggest using high performance Ni-MH rechargeable battery, using alkaline battery will lower the runtime of high intensity light.

⦿ Please use batteries of high quality, if the flashlight is not to be used for an extended period, remove the batteries, or the flashlight could be damaged by electrolyte leakage or battery explosion.

⦿ Please replace the O-ring if they are damaged after using for a long time and regularly lubricant the o-rings as to not erode the rubber. Doing so will keep the flashlight properly sealed against water.

⦿ Please clean the contacts of your light from time to time, especially if the light flickers or doesn't light up. There may be several reasons for a flickering or not working light:

**Reason A:** The battery needs replacing.

**Solution:** Replace batteries (Please confirm the correct installation of anode and cathode).

**Reason B:** The threads, PCB board contact or other contacts are dirty.

**Solution:** Clean the contact points with an alcohol soaked cotton swab.

If the above methods don't work, please contact the distributors and refer to the warranty policy.

## Product Warranty

We will replace products afflicted with manufacturing defects within 15 days of purchase and repair a light free of charge within 24 months of purchase if problems develop with normal use; if repair is required after 24 months from the date of purchase, we will charge for parts. The total repair fee is dictated by the cost of the replaced materials.

## Warranty Card Registration

We kindly suggest that you register your guarantee card on the official website for Fenixlight Limited. You can get an extra six-month warranty period once you have successfully registered. What's more, you could take part in the lottery of questionnaire at the same time.

## Warning

**The LD10 is a high-intensity lighting device and capable of causing eye damage, please avoid shining the light directly into the eyes.**



# LD10

Max 132 Lumens

## User manual