

| REVISIONS | BY |
|-----------|----|
|           |    |
|           |    |
|           |    |
|           |    |
|           |    |

480V 3Ø 20HP – 60HP SOFT STARTER  
ELECTRICAL STANDARD – ALTERNATE

FOR  
EMERALD COAST UTILITIES AUTHORITY  
ESCAMBIA COUNTY, FL

| SHEET NO. | SHEET DESCRIPTION                                               |
|-----------|-----------------------------------------------------------------|
| 1         | MAIN POWER DISTRIBUTION SCHEMATIC                               |
| 2         | CONTROL SCHEMATIC                                               |
| 3         | DIGITAL INPUTS SCHEMATIC                                        |
| 4         | DIGITAL OUTPUTS & ANALOG INPUTS SCHEMATIC                       |
| 5         | ANALOG OUTPUTS & STARTER CONTROL SCHEMATIC                      |
| 6         | TERMINAL BLOCK LAYOUT AND FIELD CONNECTIONS                     |
| 7A        | BACK-TO-BACK EXTERIOR PANEL LAYOUT & FIELD CONDUIT REQUIREMENTS |
| 8         | POWER & PUMP 1 INTERNAL PANEL LAYOUTS                           |
| 9         | PUMP 2 & CONTROL PANEL INTERNAL LAYOUTS                         |
| 10        | EQUIPMENT LIST                                                  |
| 11        | HORSEPOWER RELATED EQUIPMENT & POWER CONDUCTORS                 |
| 12        | PANEL TO PANEL CONDUCTORS & EQUIPMENT                           |
| 13        | PANEL TO PANEL WIRING                                           |
| 14A       | BACK-TO-BACK STAINLESS STEEL FRAME LAYOUT                       |
| 15        | TABLES, LEGENDS & TAGS                                          |
| 16        | ISR INSTRUCTIONS                                                |
| 17        | GENERAL NOTES AND DETAILS                                       |
| 18        | GENERAL NOTES AND DETAILS                                       |

IMPROVEMENTS TO WASTEWATER COLLECTION SYSTEM


LIFT STATION CONSTRUCTION DETAILS

ELECTRICAL STANDARDS




APPROVED BY:

|                  |
|------------------|
| Drawn:           |
| Designed:        |
| Checked:         |
| Date: 12/18/2014 |
| Scale:           |
| Project No:      |
| Sheet No. 0      |
| Of 18 Sheets     |

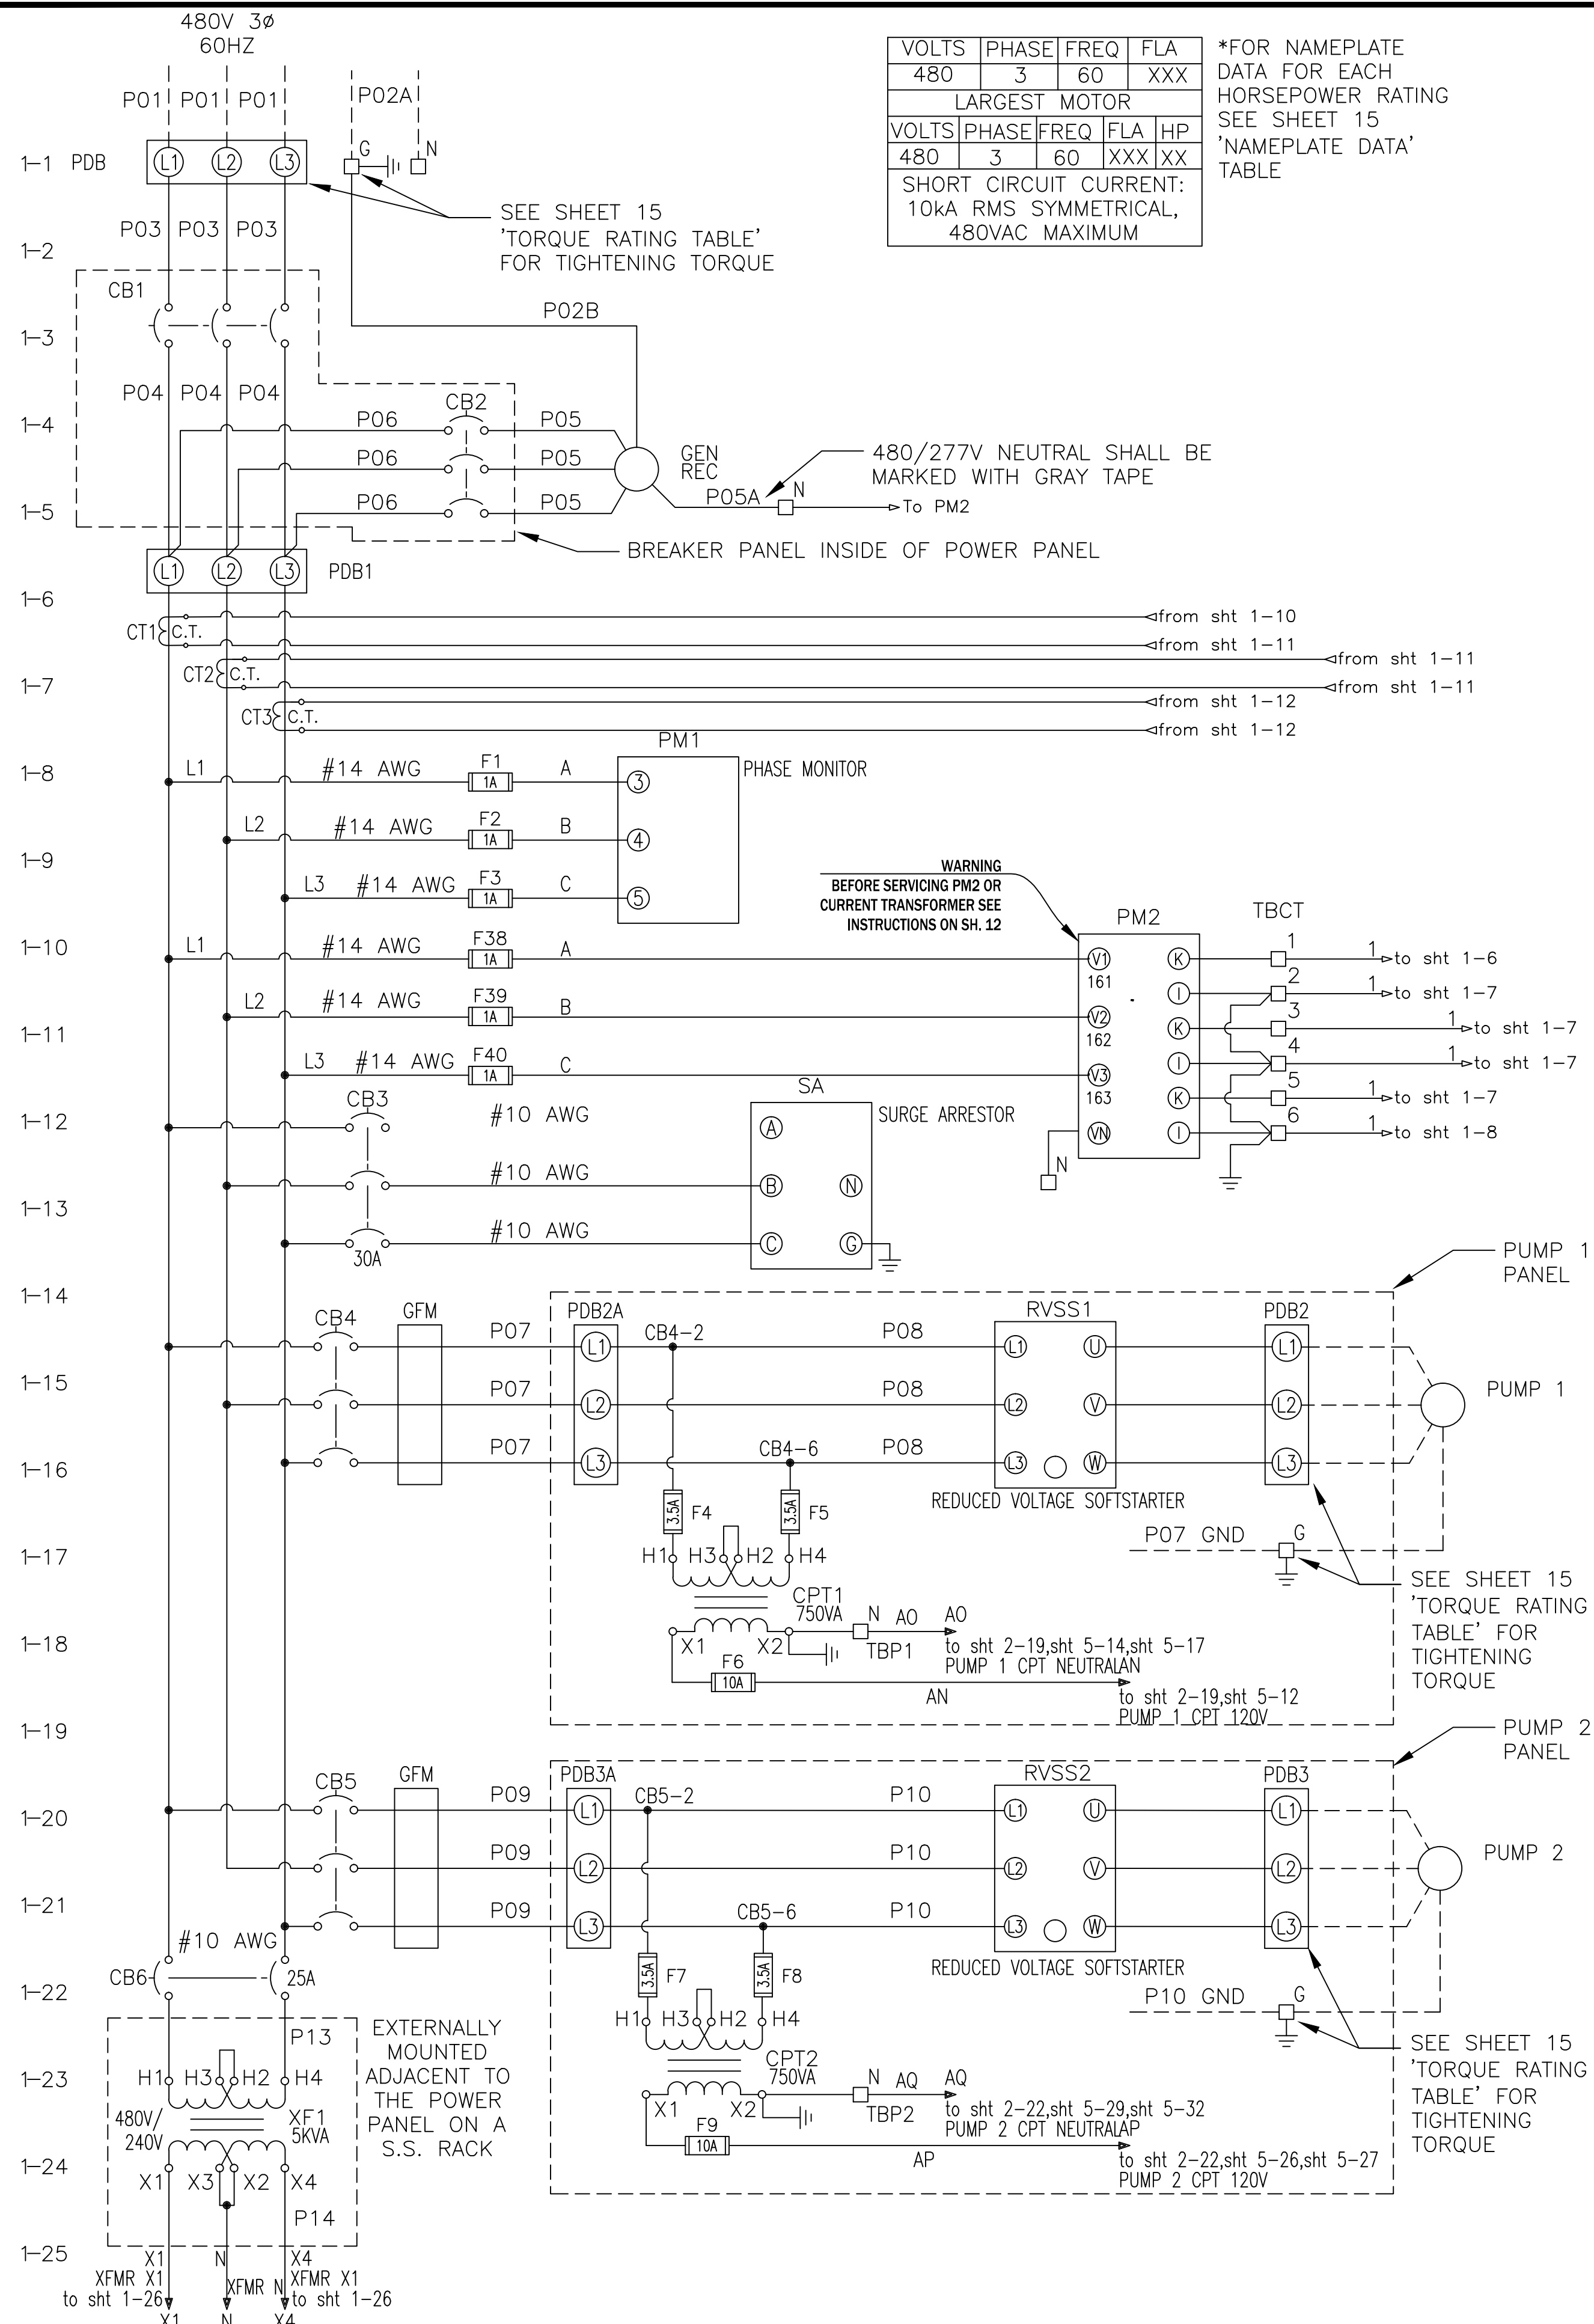

NOTES:

1. THE COMPLETED CONTROL PANEL SHALL BE LABELED AND MANUFACTURED TO MEET U.L. 508A AND 508A-1 EDITION 10C, U.S.A. STANDARD SPECIFICATIONS.
2. CONTROL PANEL WIRING SHALL BE STRANDED COPPER, MINIMUM SIZE #16 AWG WITH 600V 90DEGREE C TYPE THHN INSULATION.
3. CONTROL PANEL WIRING SHALL BE NUMBERED AT BOTH ENDS WITH TYPE WRITTEN, HEAT SHRINKABLE WIRE MARKERS.
4. ALL WIRING WITHIN THE CONTROL PANEL SHALL BE COLOR CODED OR CODED USING ELECTRICAL TAPE IN SIZES WHERE COLORED INSULATION IS NOT AVAILABLE. THE FOLLOWING CODING SHALL BE USED:
  - 4.1. UNGROUNDED AC CONDUCTORS AT SUPPLY VOLTAGE - BLACK
  - 4.2. GROUNDED AC CURRENT CARRYING CONDUCTORS - WHITE
  - 4.3. UNGROUNDED AC CONDUCTORS BELOW SUPPLY VOLTAGE - RED
  - 4.4. UNGROUNDED AC CONTROL CONDUCTORS & CONDUCTORS THAT REMAIN ENERGIZED WHEN THE MAIN DISCONNECT IS OFF - YELLOW
  - 4.5. UNGROUNDED DC CONTROL CONDUCTORS - ORANGE
  - 4.6. GROUNDED DC CURRENT CARRYING CONDUCTORS - BROWN
  - 4.7. INTRINSICALLY SAFE WIRING - BLUE
  - 4.8. GROUND CONDUCTORS - GREEN
5. SEE SHEETS 11 & 12 FOR DETAILS REGARDING ALL POWER CONDUCTORS LABELED PXX.
6. SEE SHEET 11 'HORSEPOWER RELATED COMPONENTS EQUIPMENT LIST' FOR RATINGS OF OVERCURRENT PROTECTION DEVICES.
7. SEE SHEET 6 FOR TERMINAL BLOCK DESIGNATIONS AND DESCRIPTIONS.

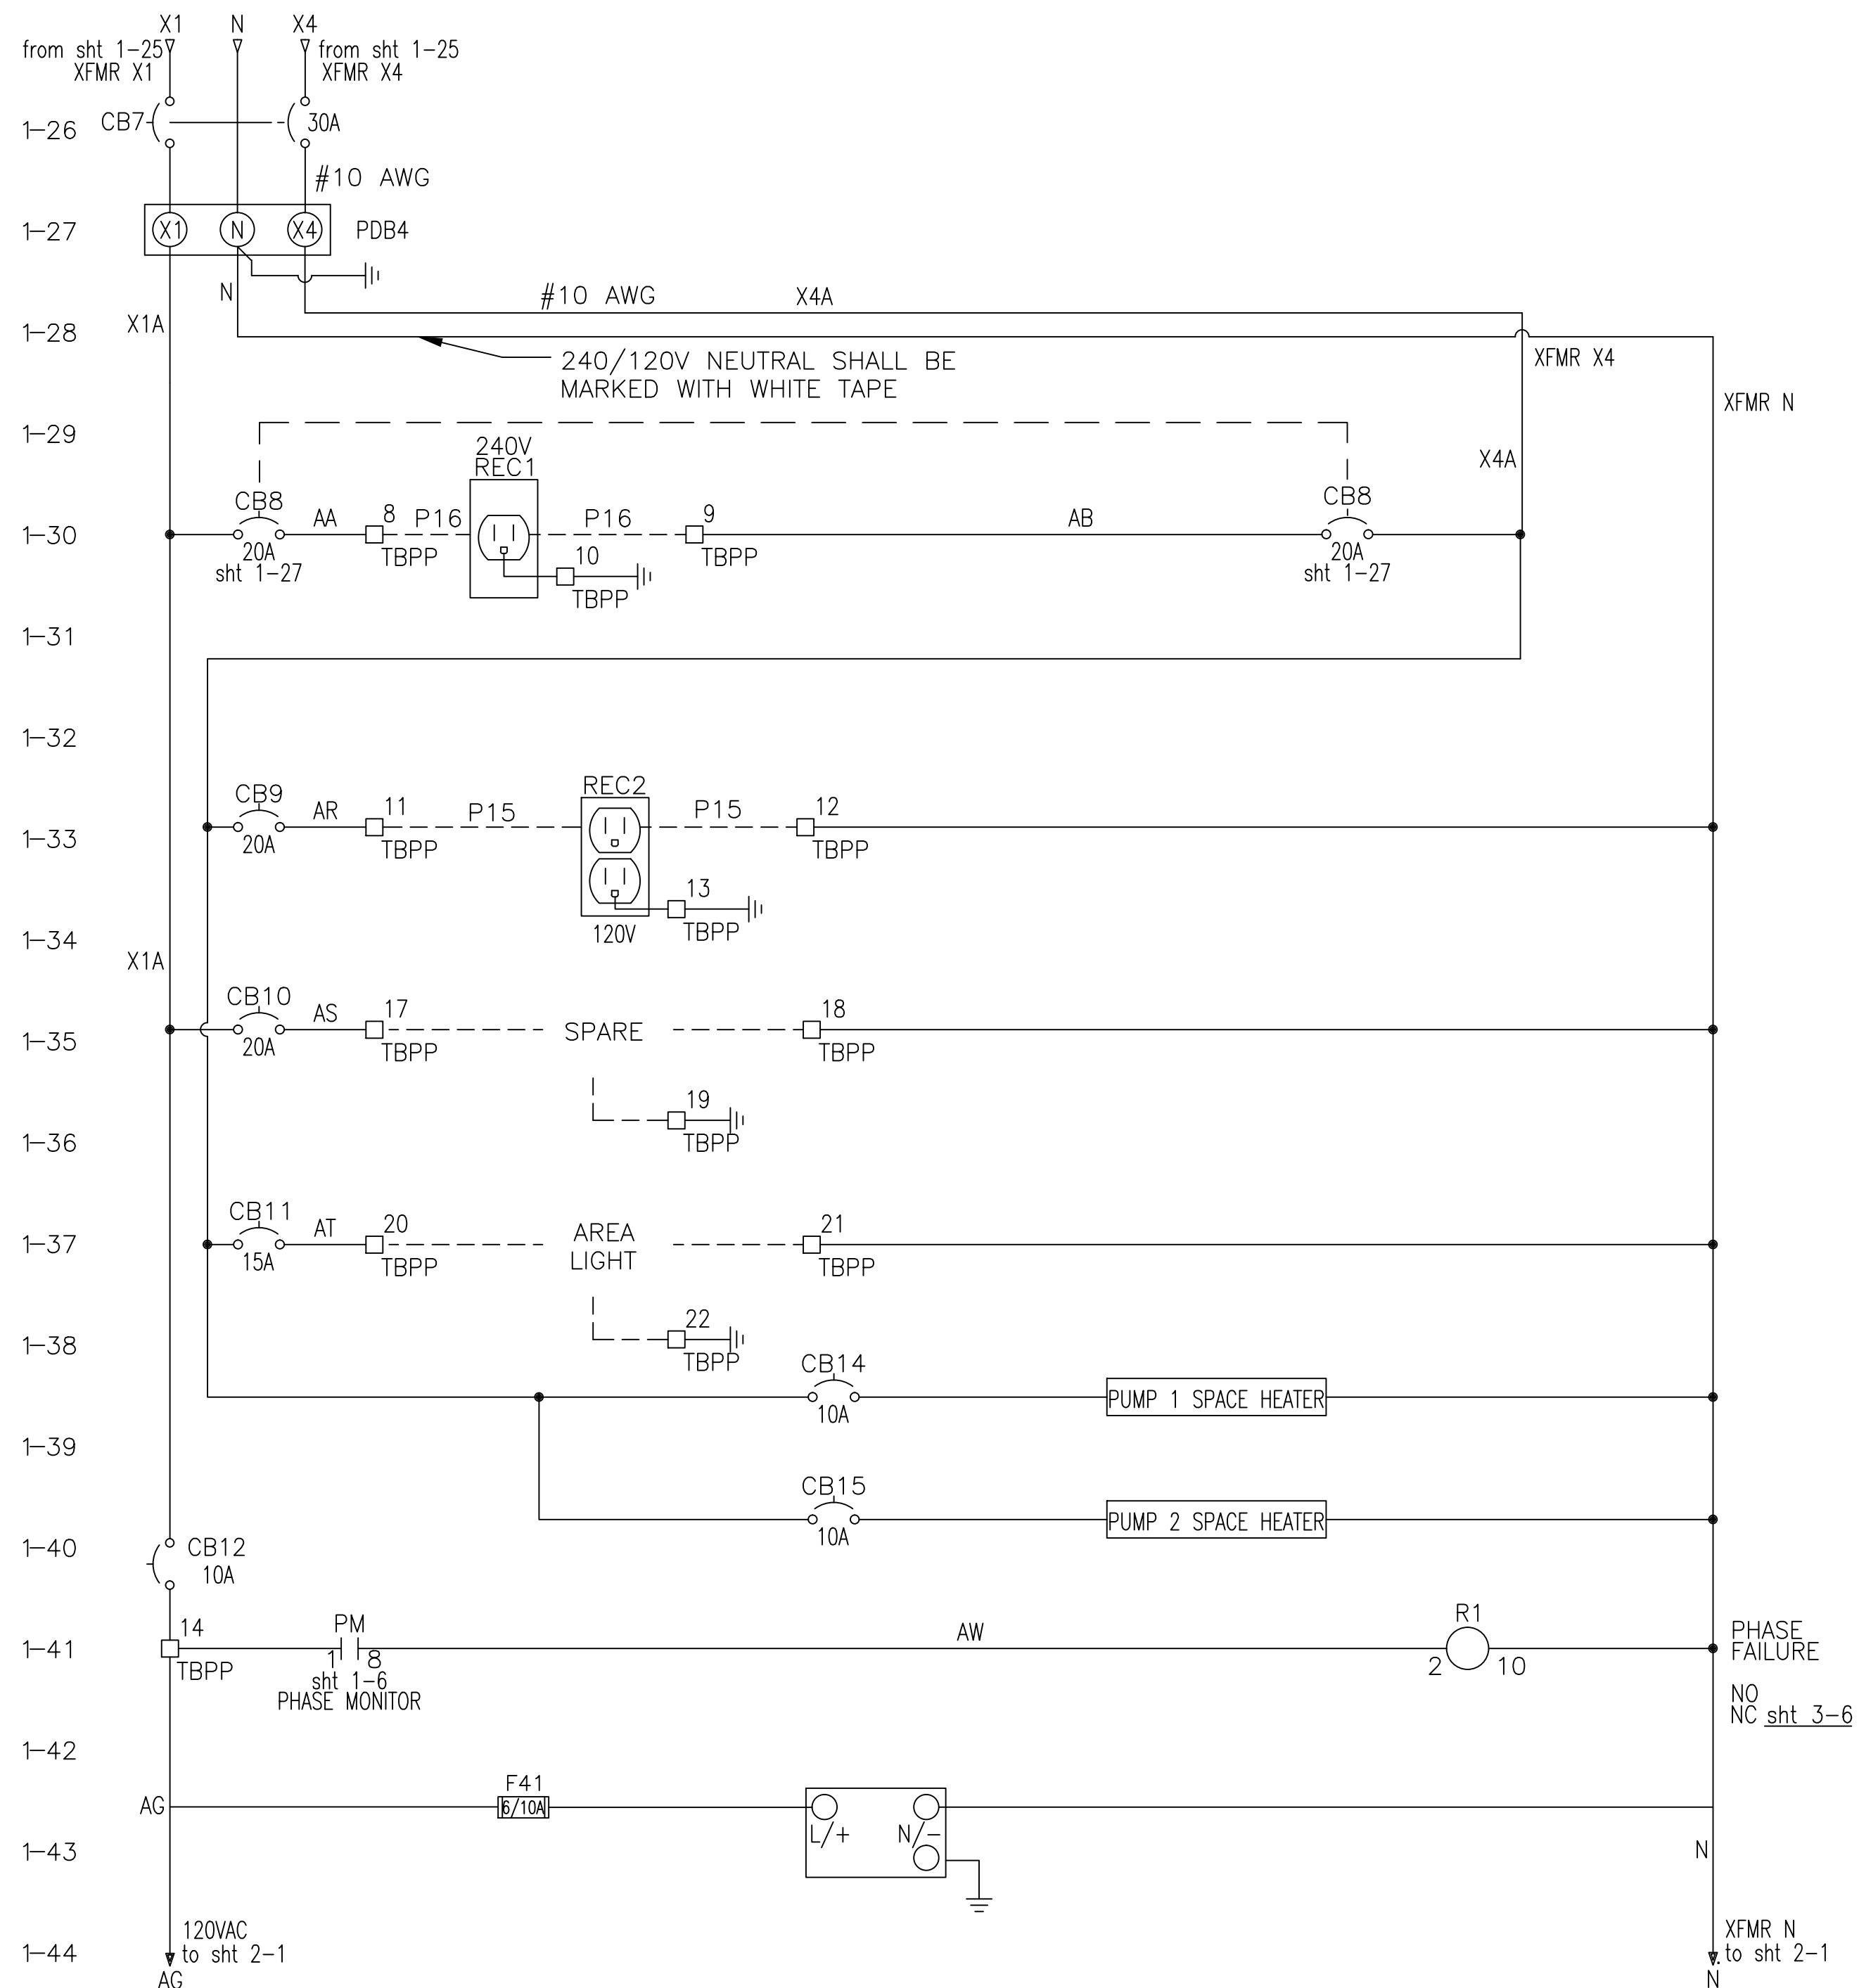

| REVISIONS | BY |
|-----------|----|
|           |    |
|           |    |
|           |    |
|           |    |

IMPROVEMENTS TO WASTEWATER COLLECTION SYSTEM

LIFT STATION CONSTRUCTION DETAILS



ELECTRICAL STANDARDS



APPROVED BY:

|              |            |
|--------------|------------|
| Drawn:       |            |
| Designed:    |            |
| Checked:     |            |
| Date:        | 12/18/2014 |
| Scale:       |            |
| Project No:  |            |
| Sheet No:    | 1          |
| Of 18 Sheets |            |



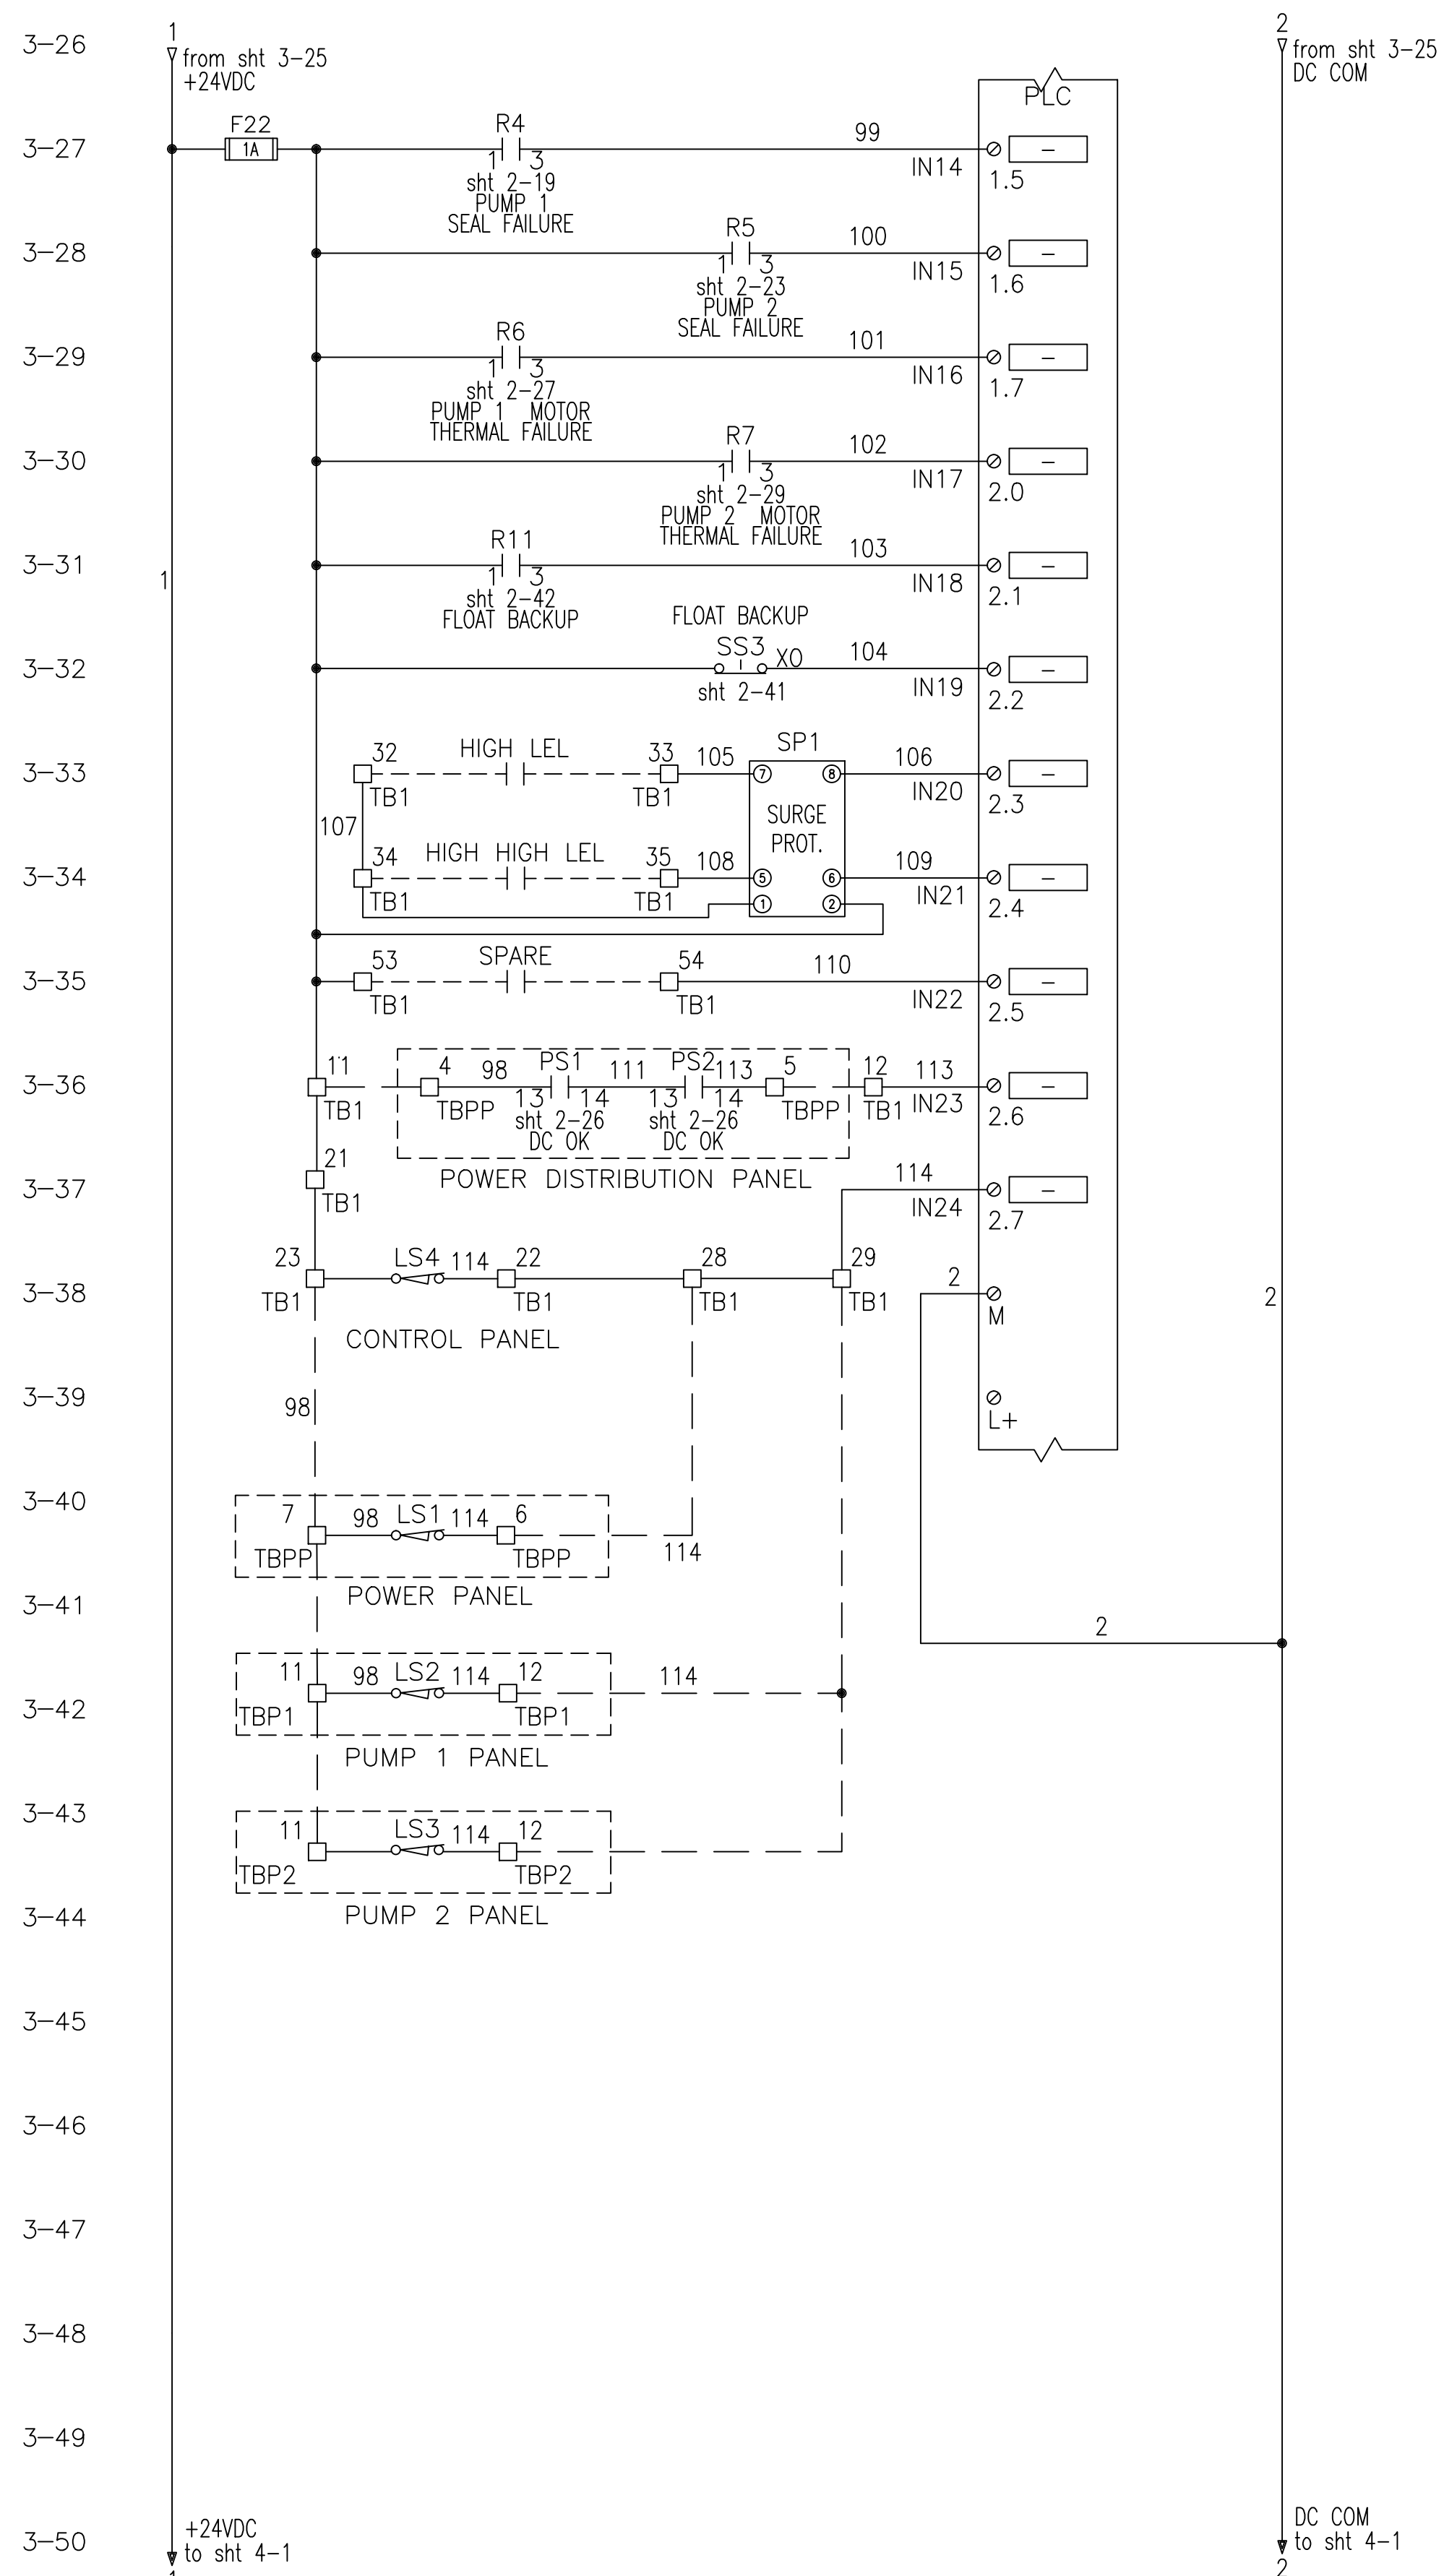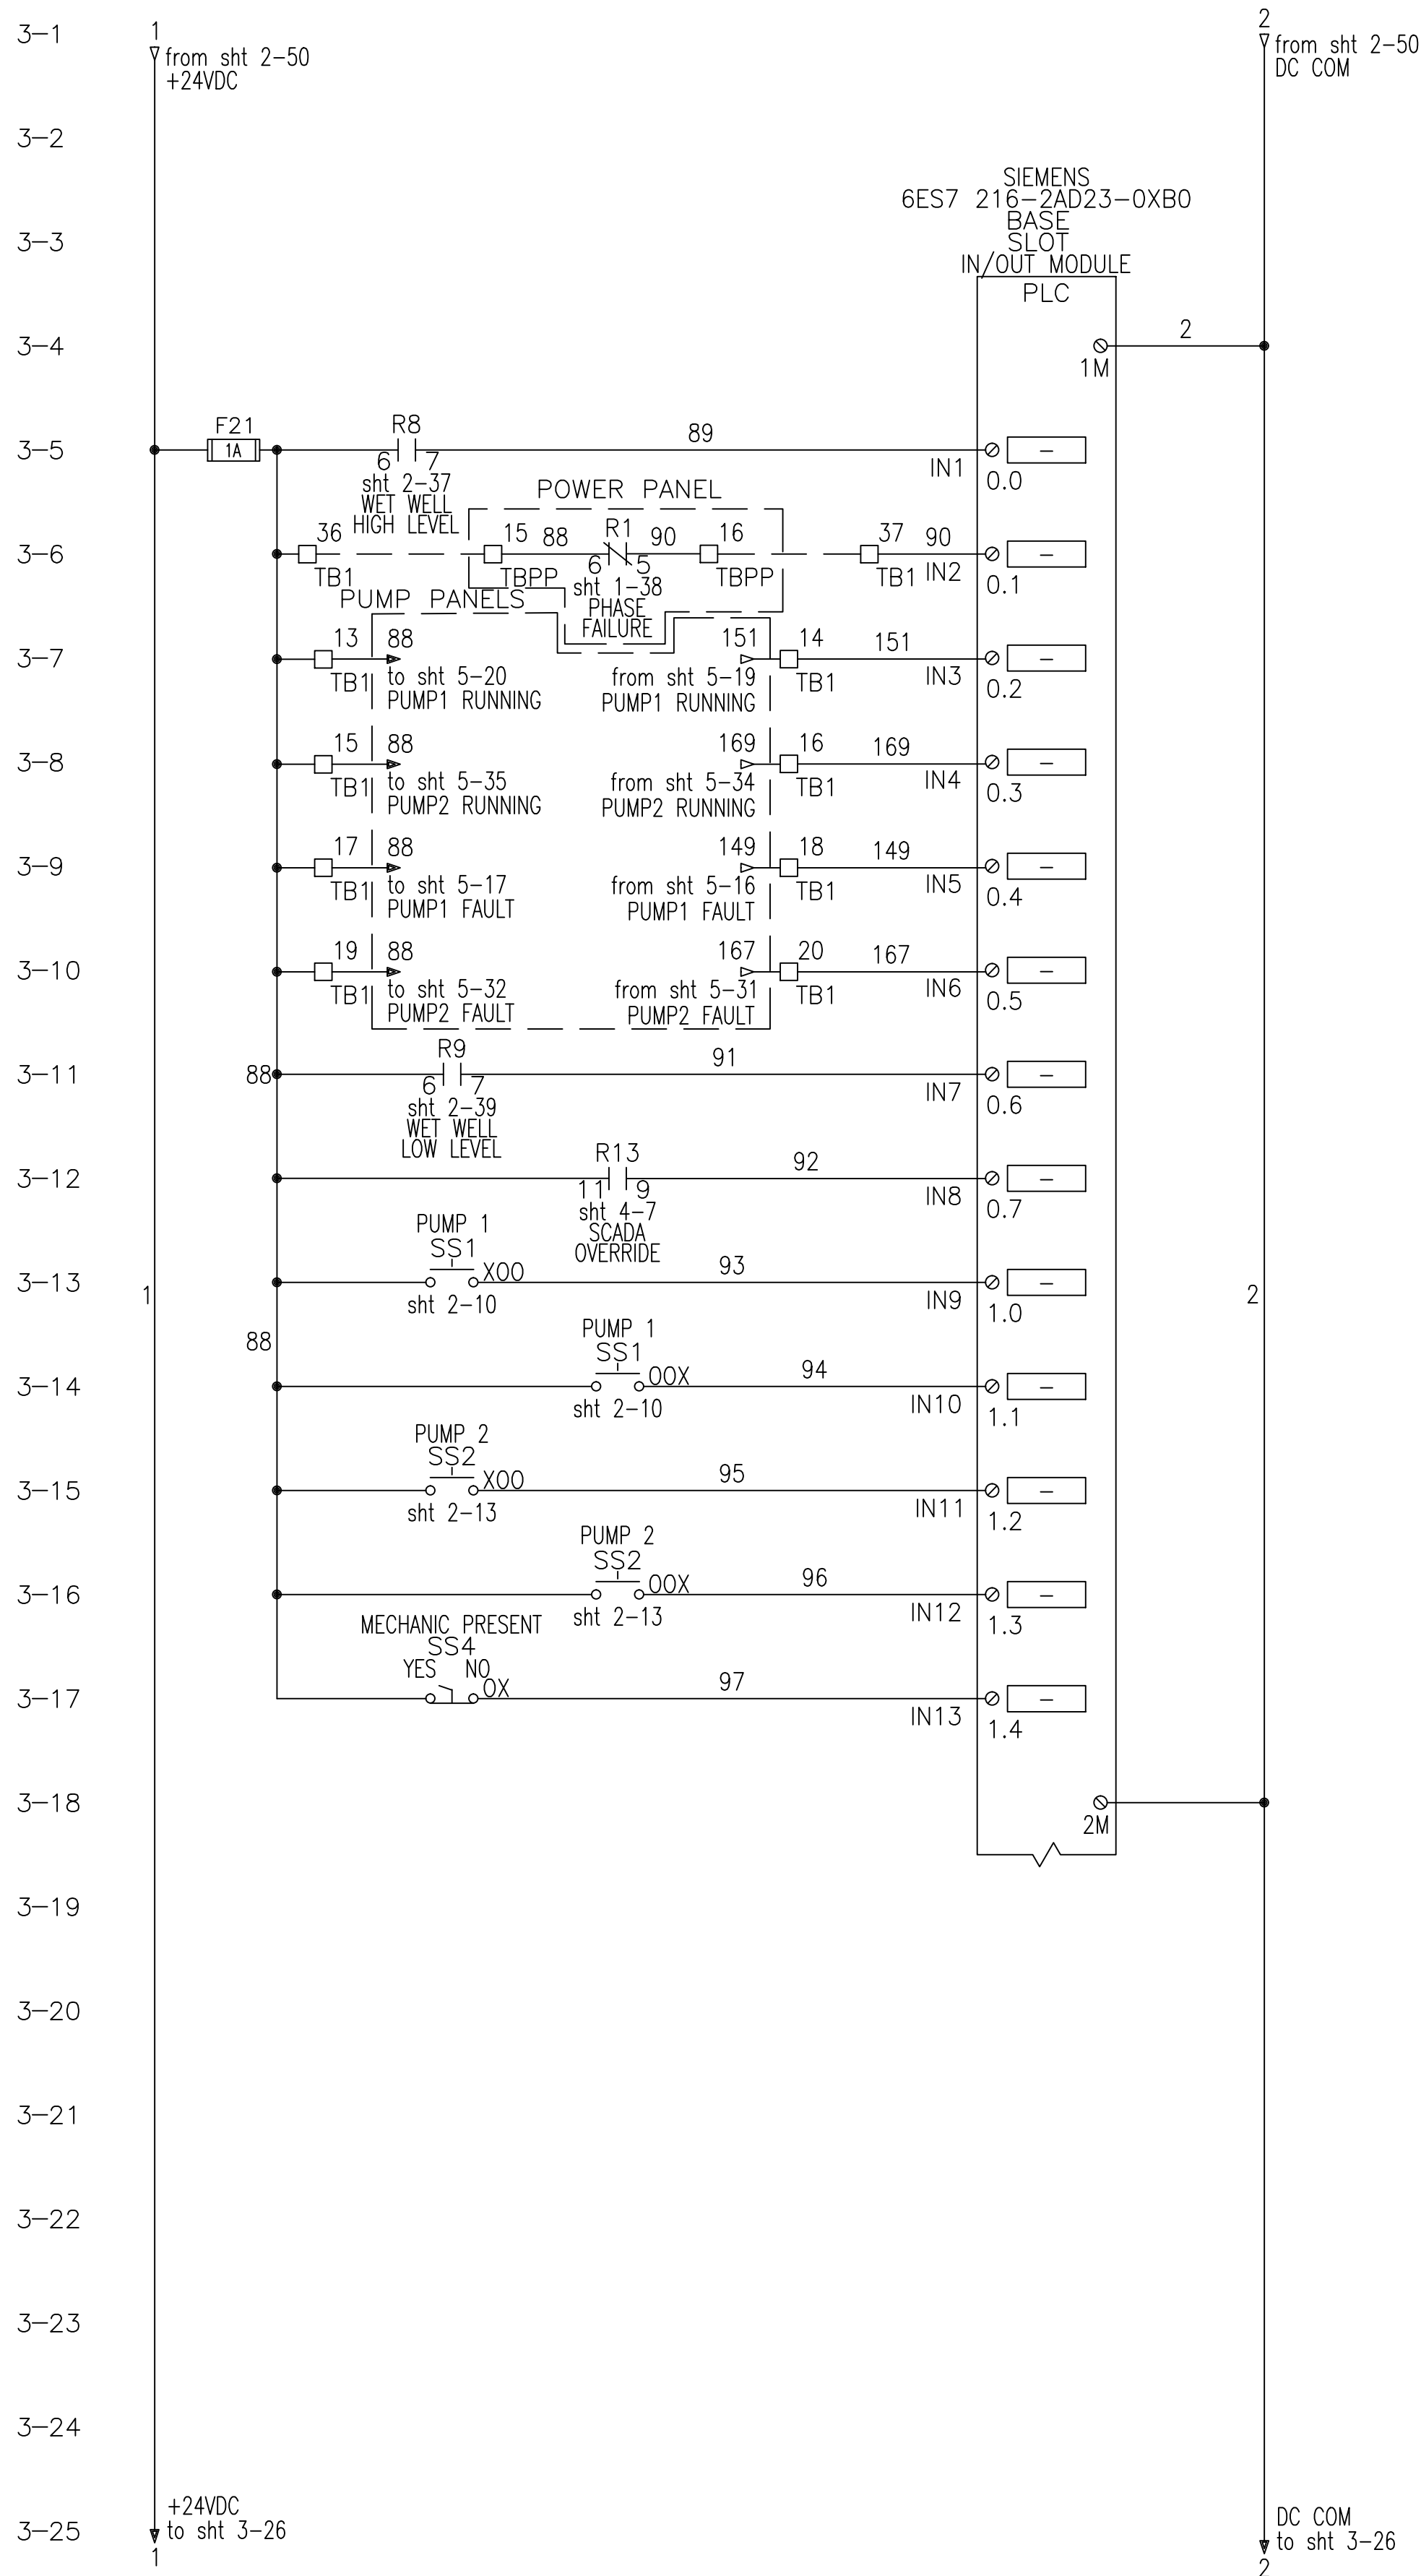


ALL WORK SHALL BE CONSTRUCTED IN ACCORDANCE WITH THE LATEST EDITION OF THE E.C.U.A. STANDARD SPECIFICATIONS

| REVISIONS | BY |
|-----------|----|
|           |    |
|           |    |
|           |    |

IMPROVEMENTS TO WASTEWATER COLLECTION SYSTEM



LIFT STATION CONSTRUCTION DETAILS

ELECTRICAL STANDARDS

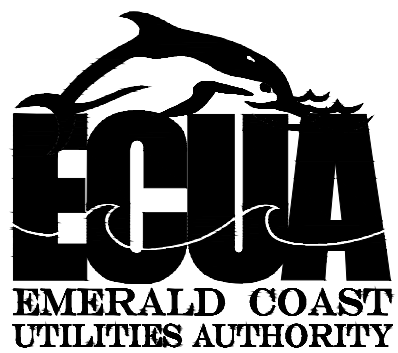

APPROVED BY:

|                  |
|------------------|
| Drawn:           |
| Designed:        |
| Checked:         |
| Date: 12/18/2014 |
| Scale:           |
| Project No:      |
| Sheet No. 3      |
| Of 18 Sheets     |

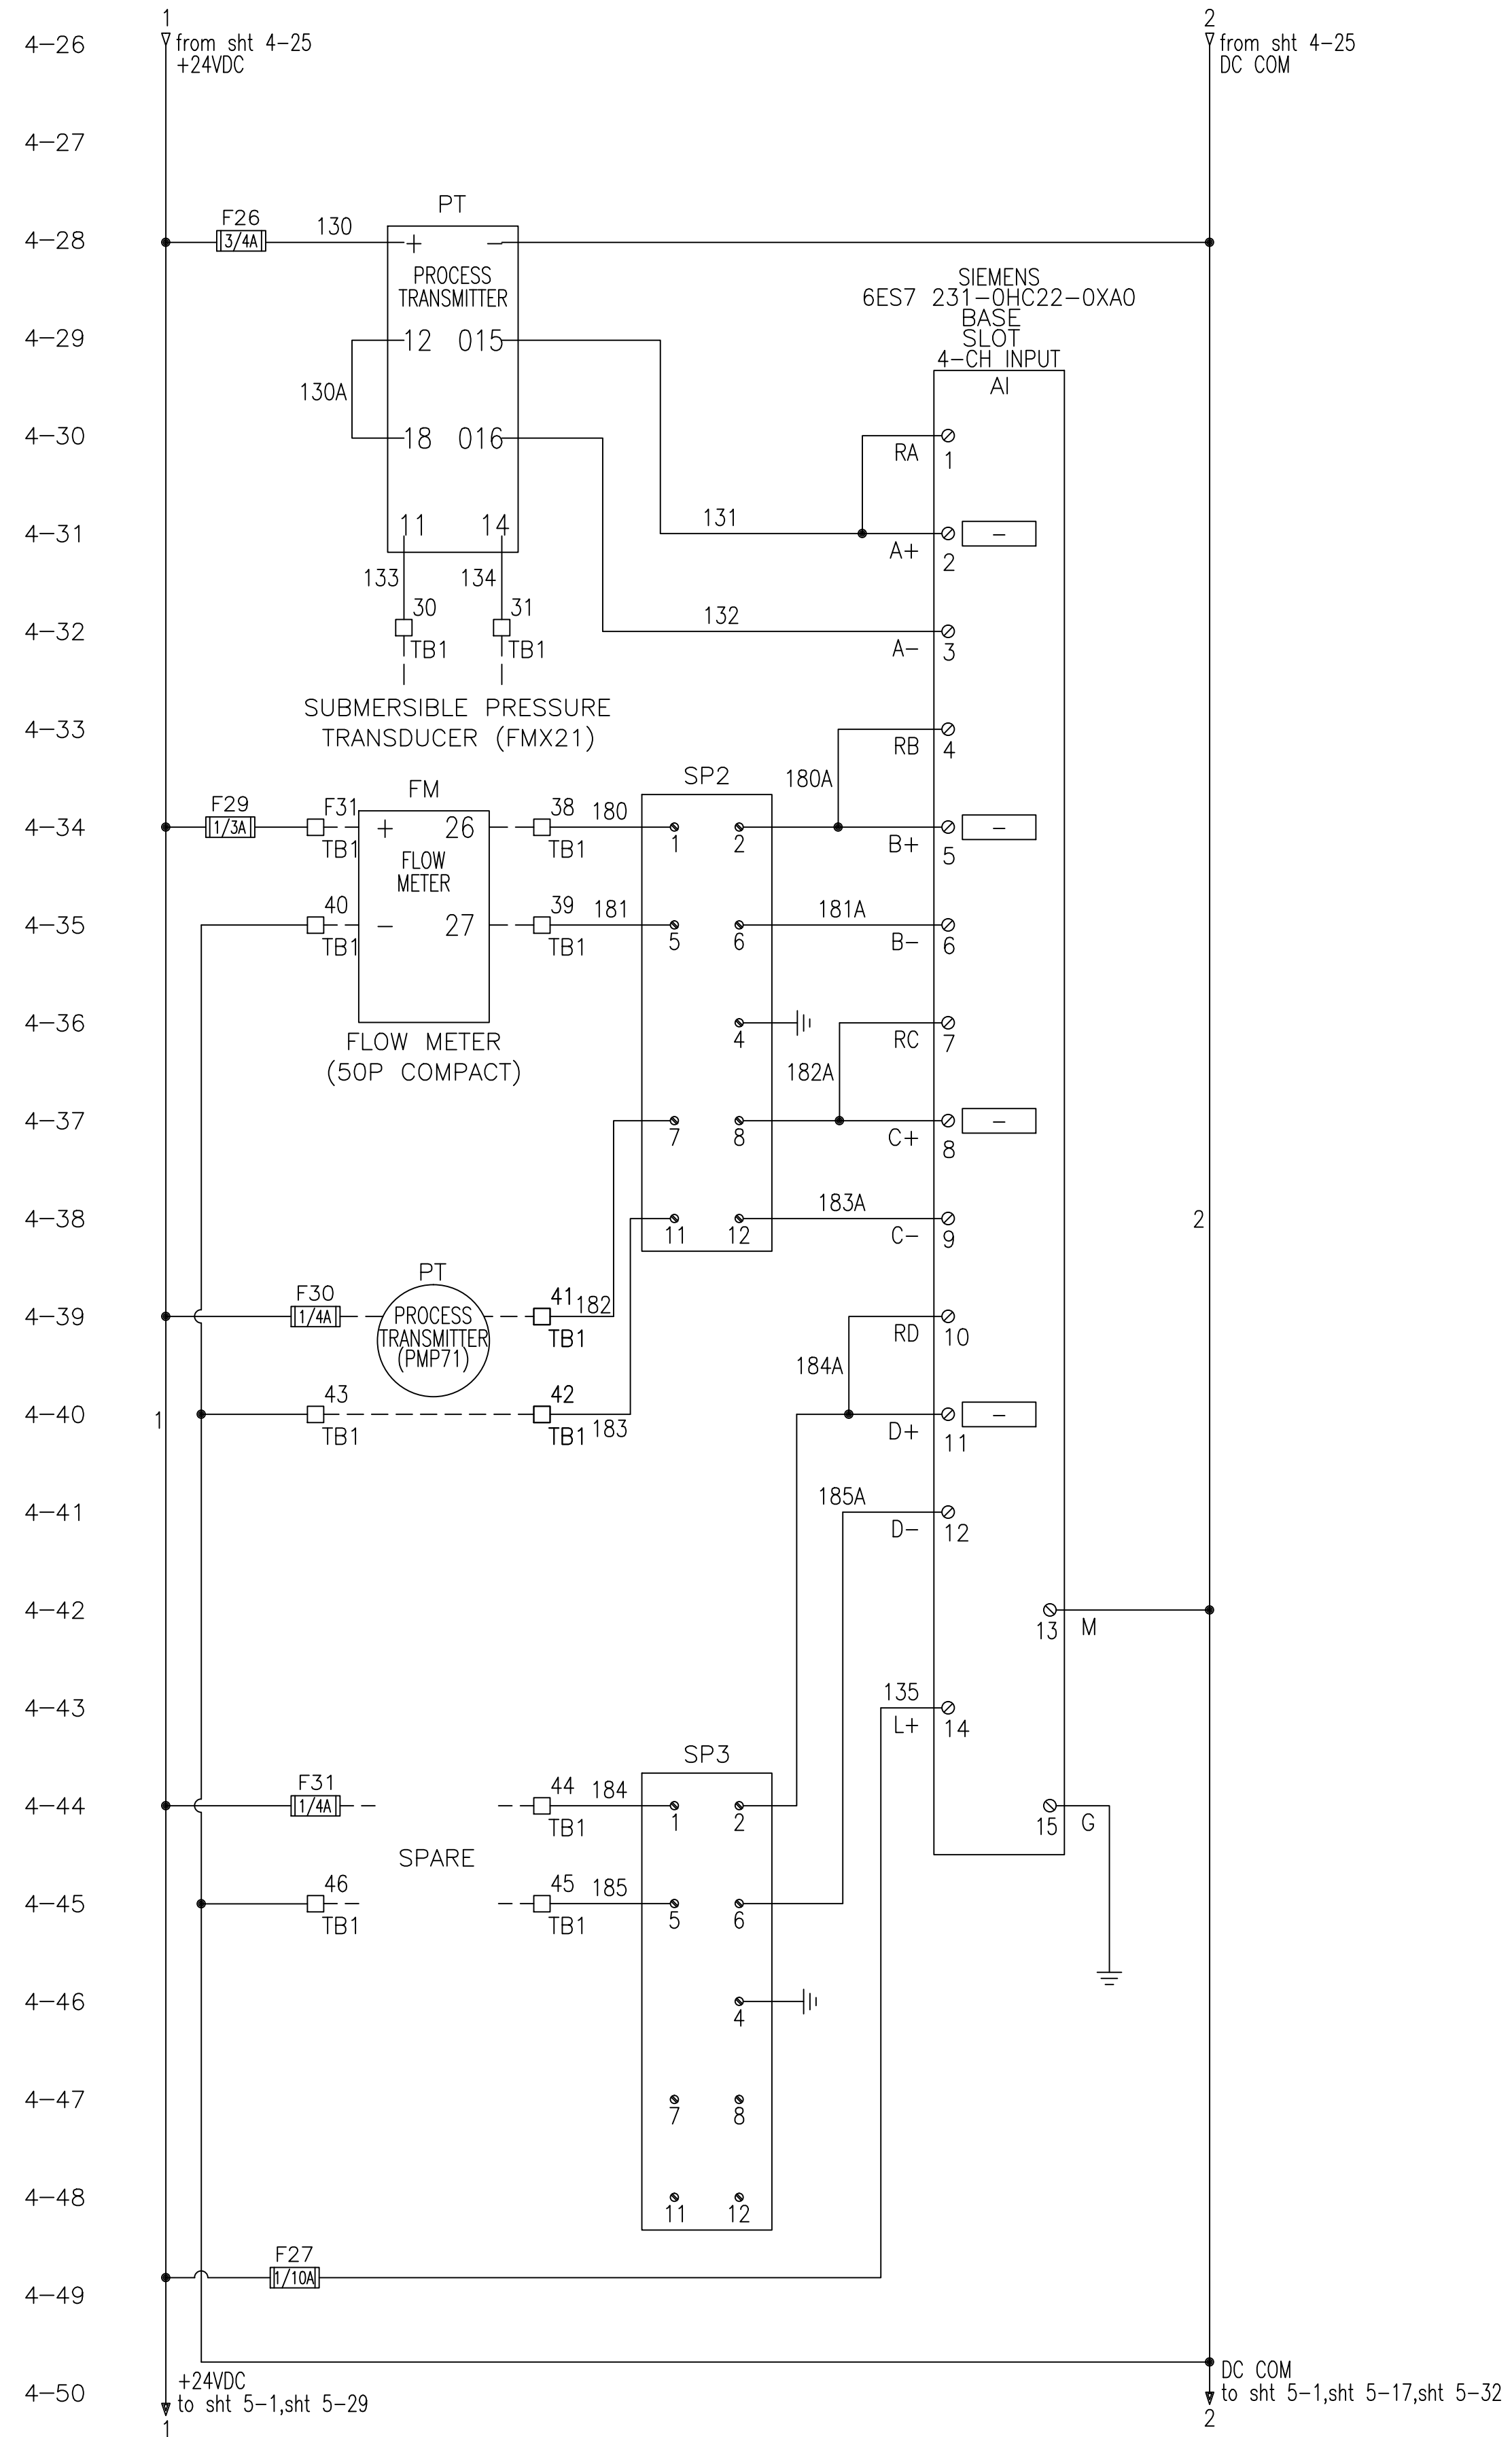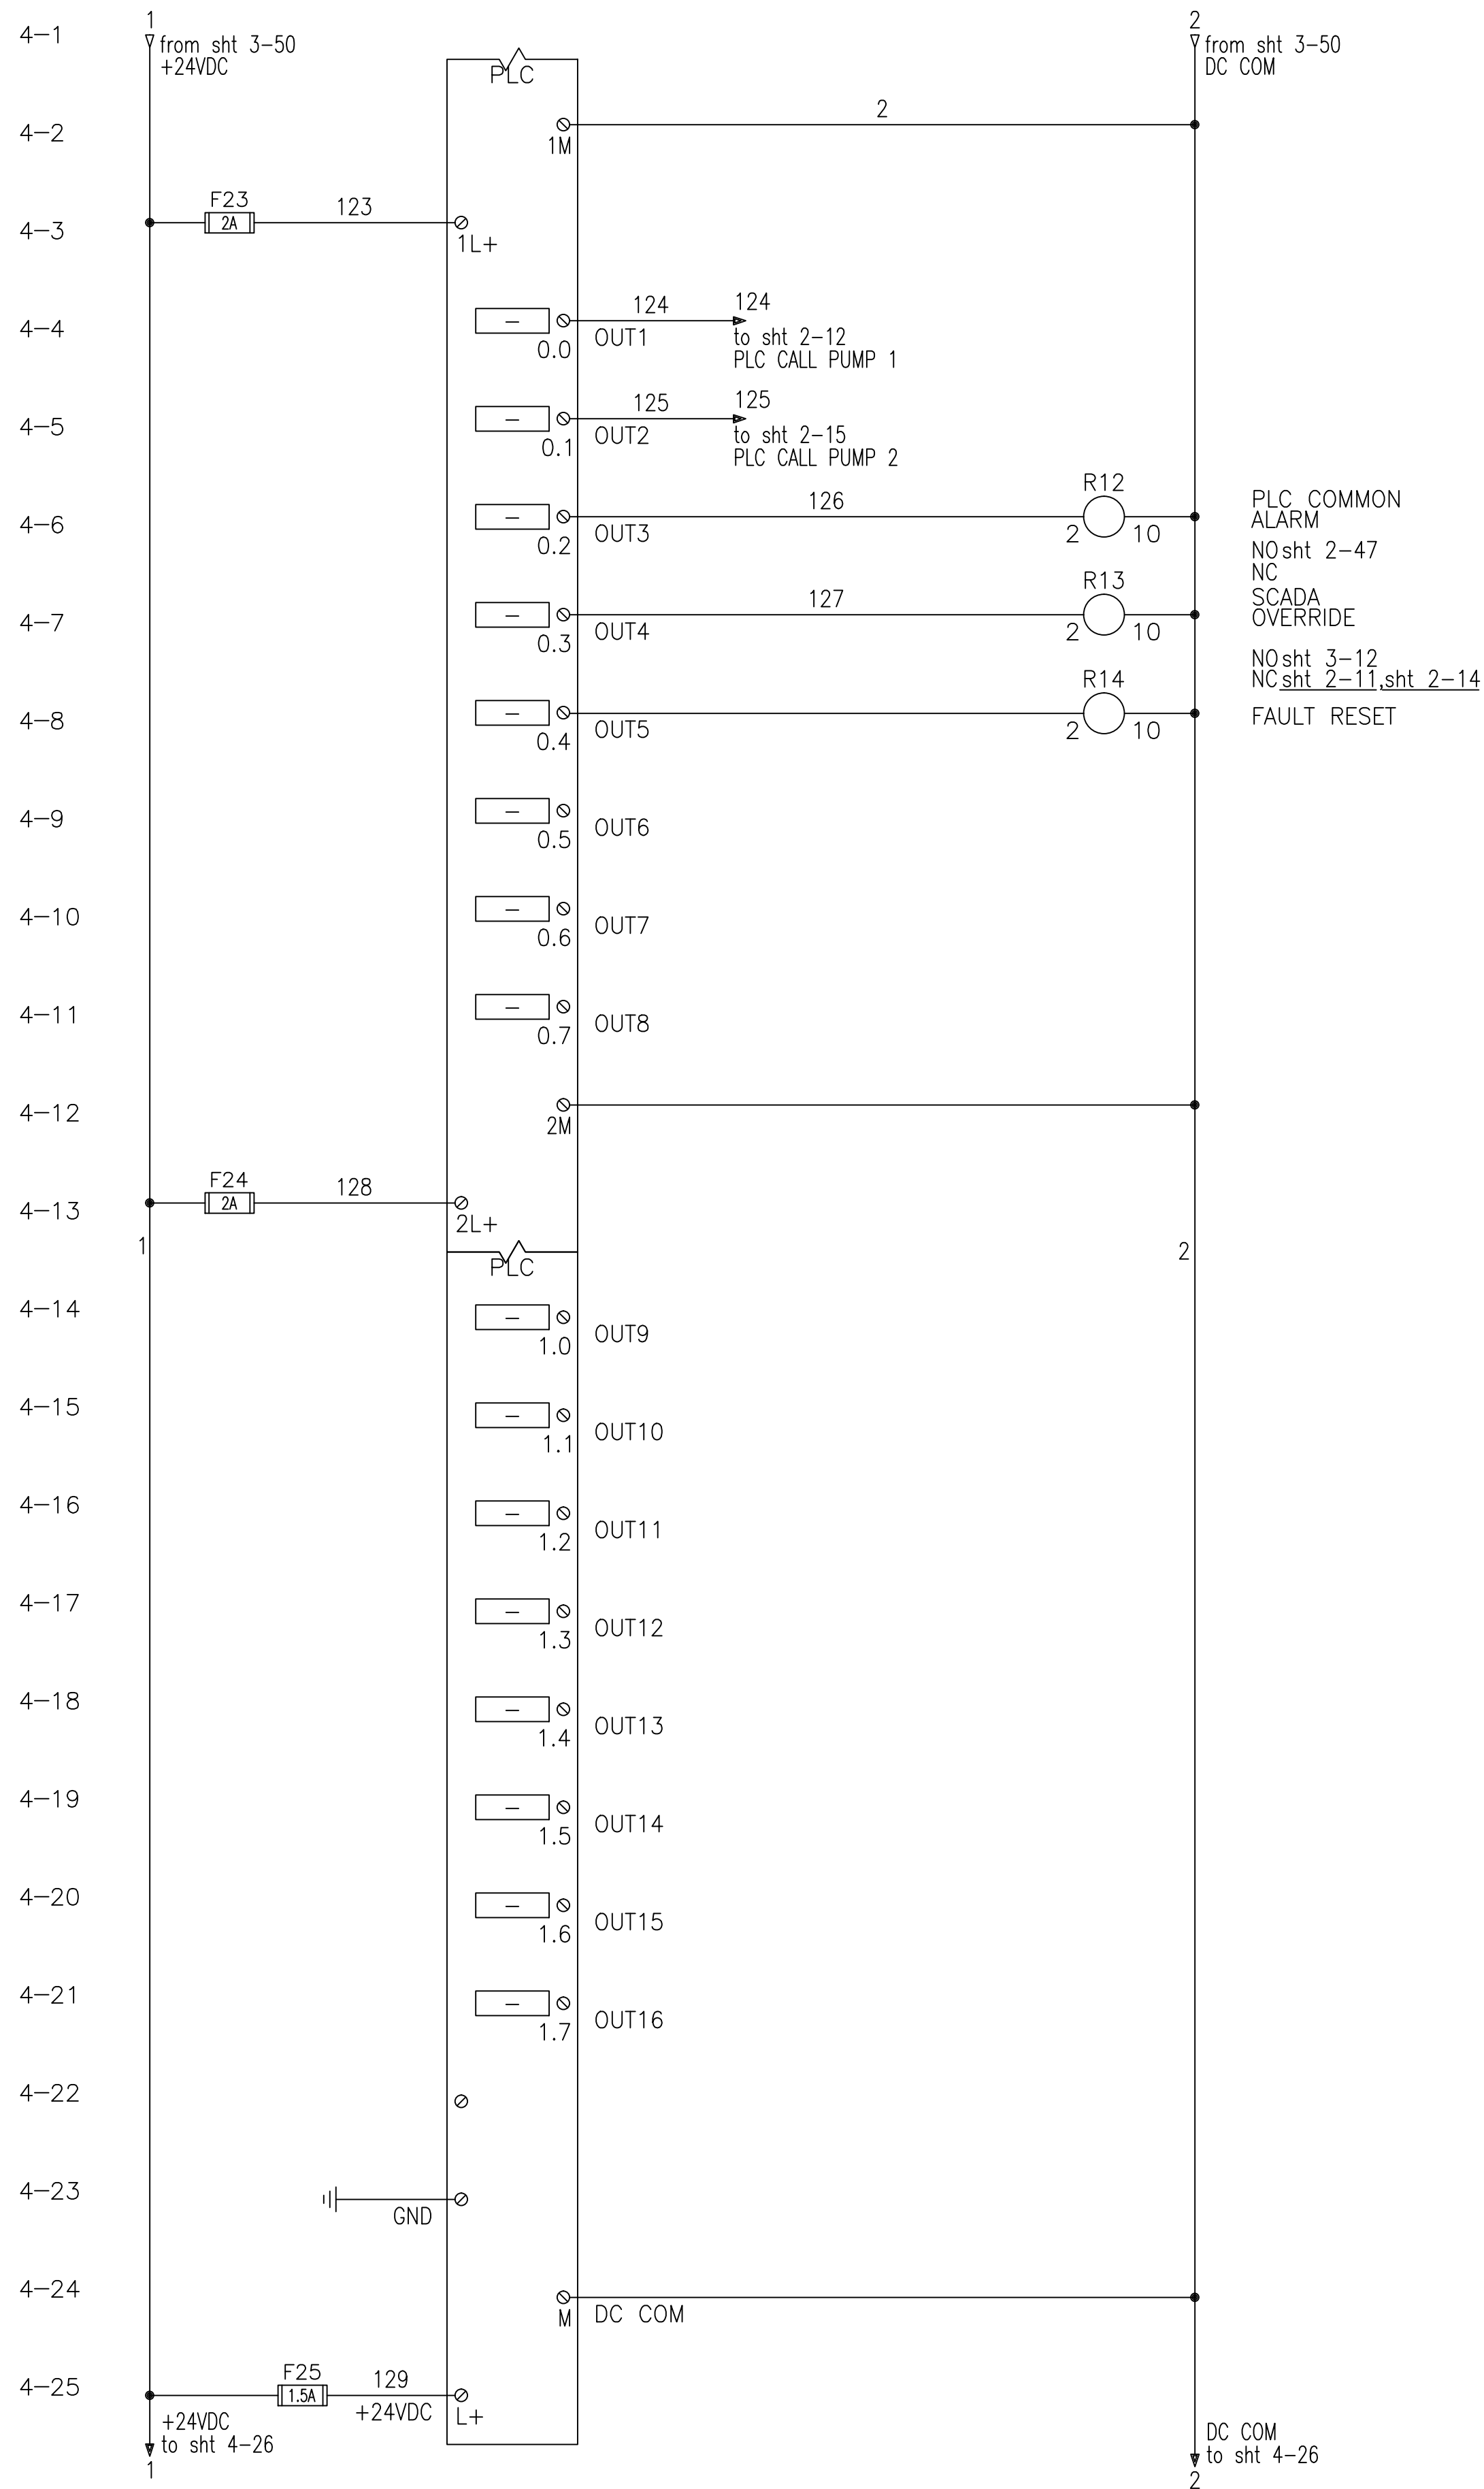

ALL WORK SHALL BE CONSTRUCTED IN ACCORDANCE WITH THE LATEST EDITION OF THE E.C.U.A. STANDARD SPECIFICATIONS


| REVISIONS | BY |
|-----------|----|
|           |    |
|           |    |
|           |    |
|           |    |

IMPROVEMENTS TO WASTEWATER COLLECTION SYSTEM  
LIFT STATION CONSTRUCTION DETAILS  
ELECTRICAL STANDARDS




APPROVED BY:

|                  |
|------------------|
| Drawn:           |
| Designed:        |
| Checked:         |
| Date: 12/18/2014 |
| Scale:           |
| Project No:      |
| Sheet No. 4      |
| Of 18 Sheets     |

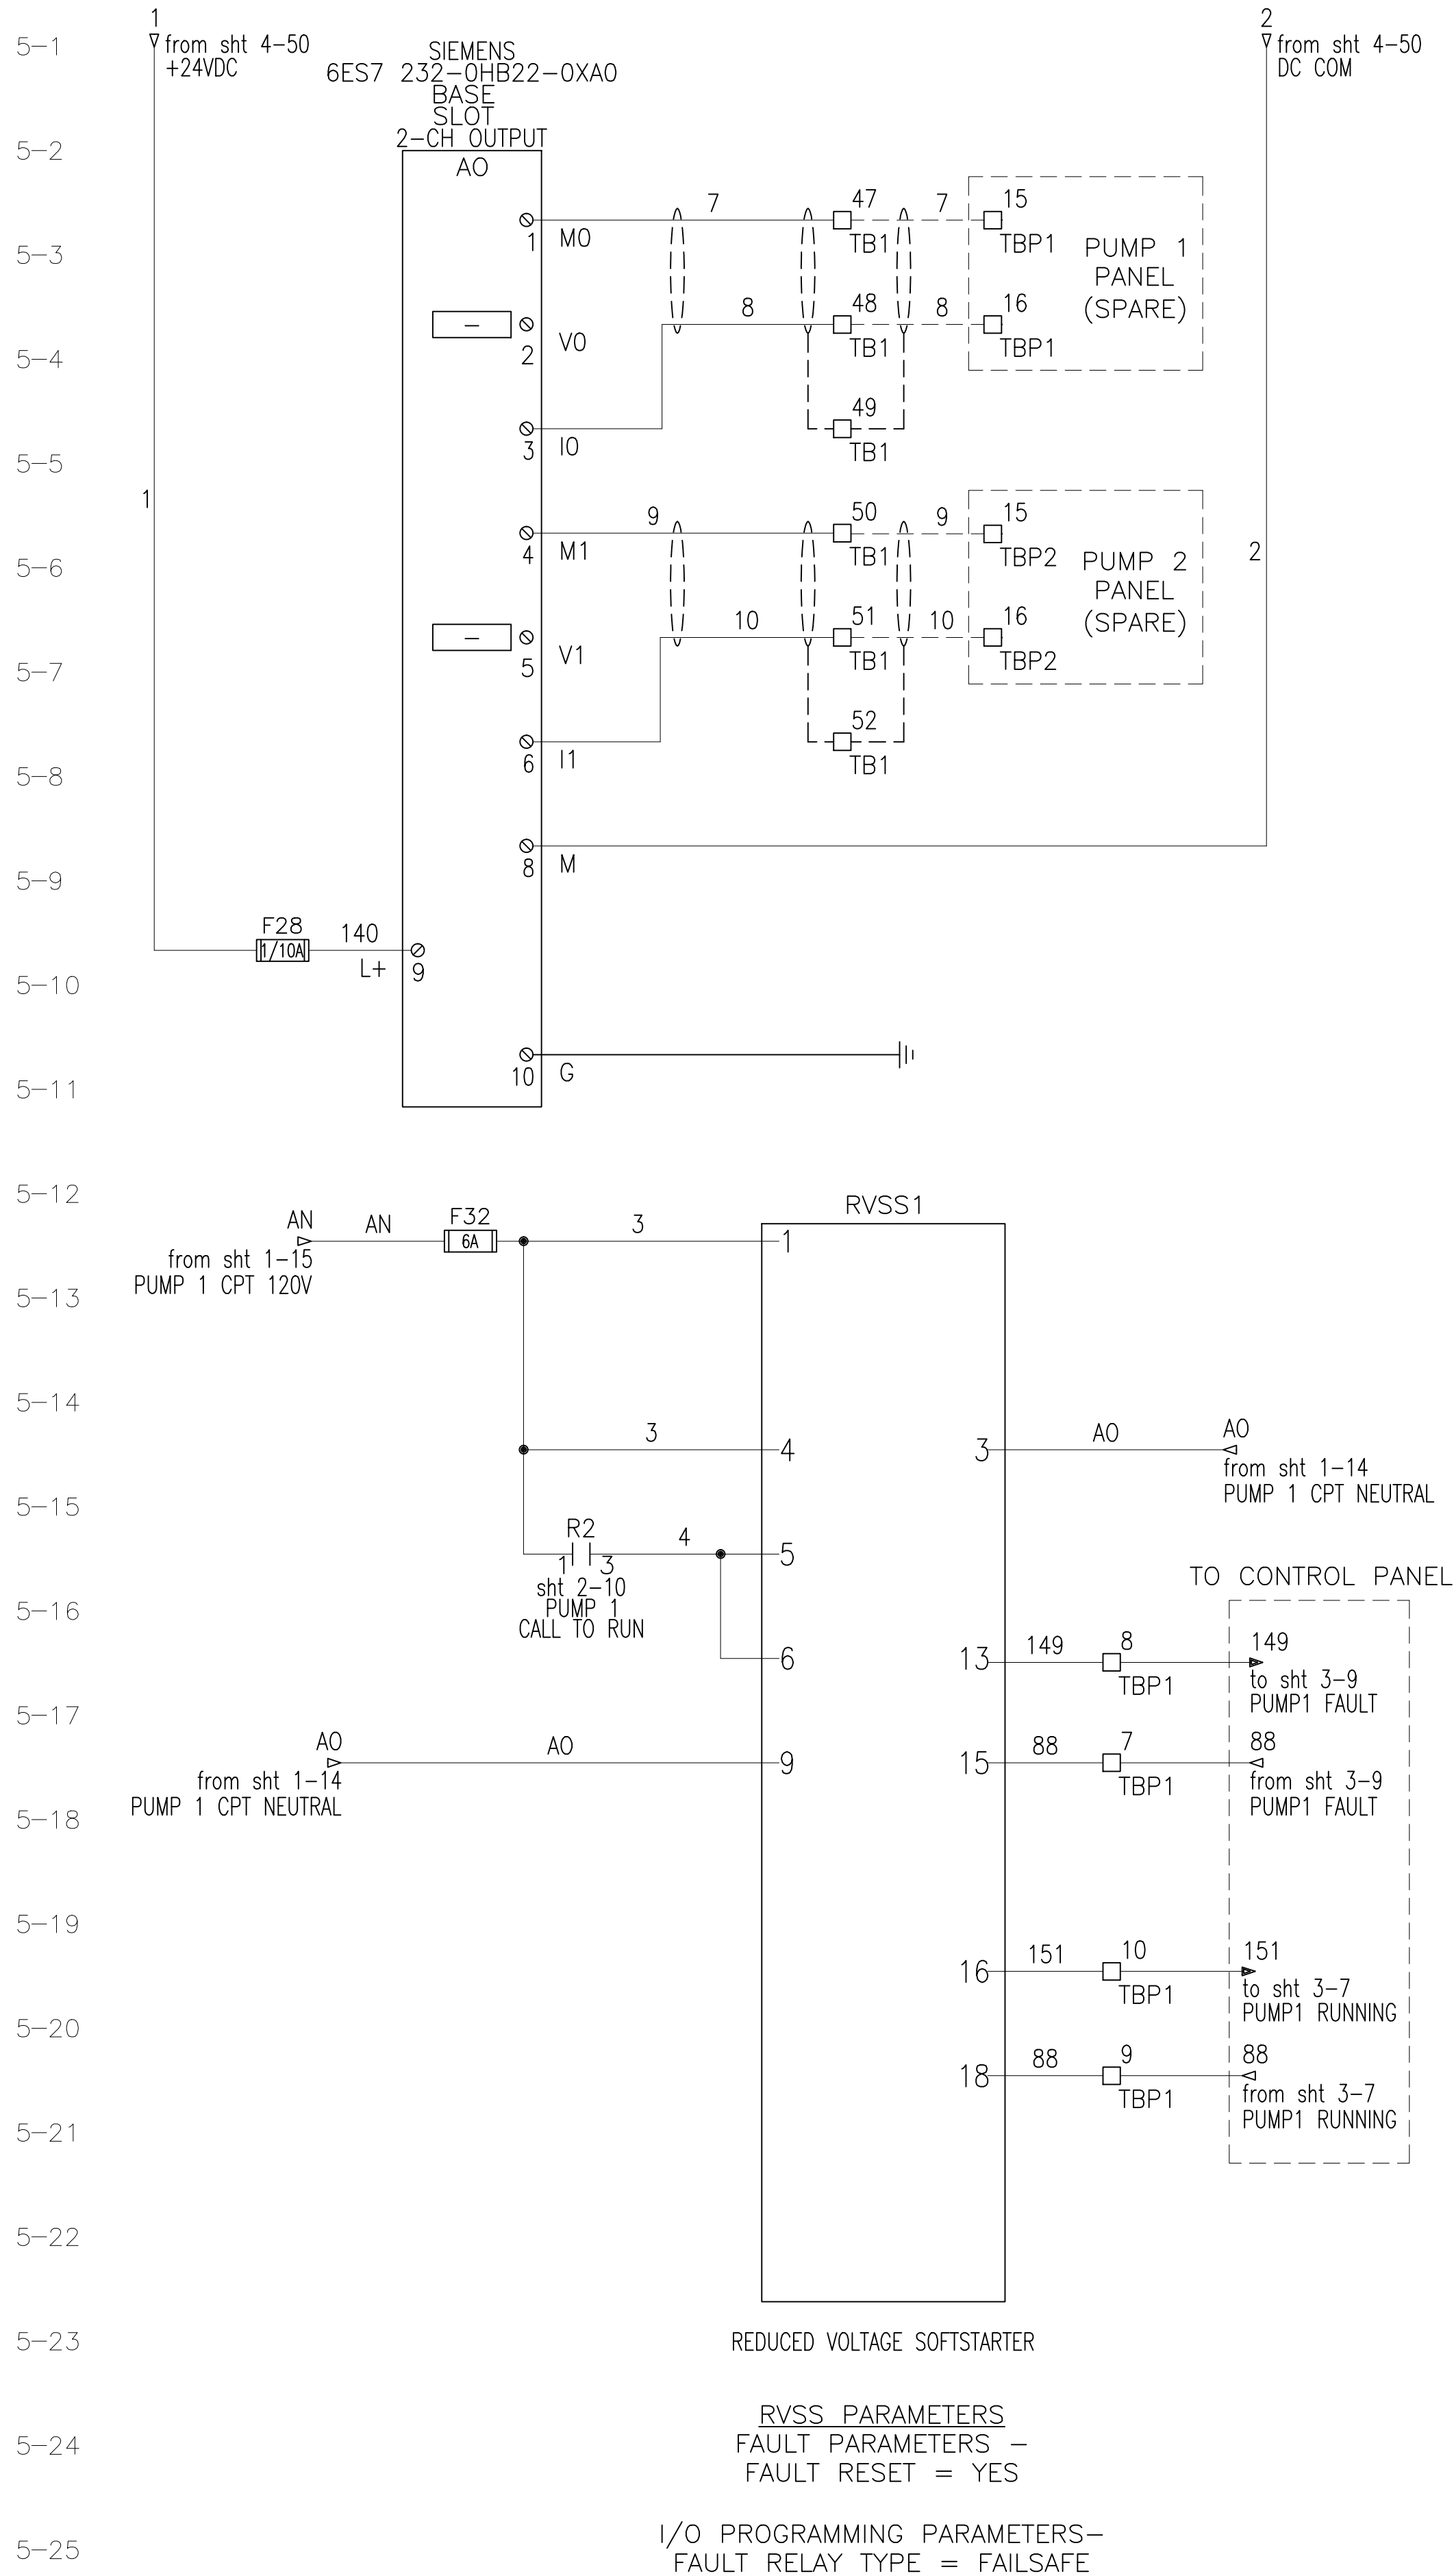

ALL WORK SHALL BE CONSTRUCTED IN ACCORDANCE WITH THE LATEST EDITION OF THE E.C.U.A. STANDARD SPECIFICATIONS

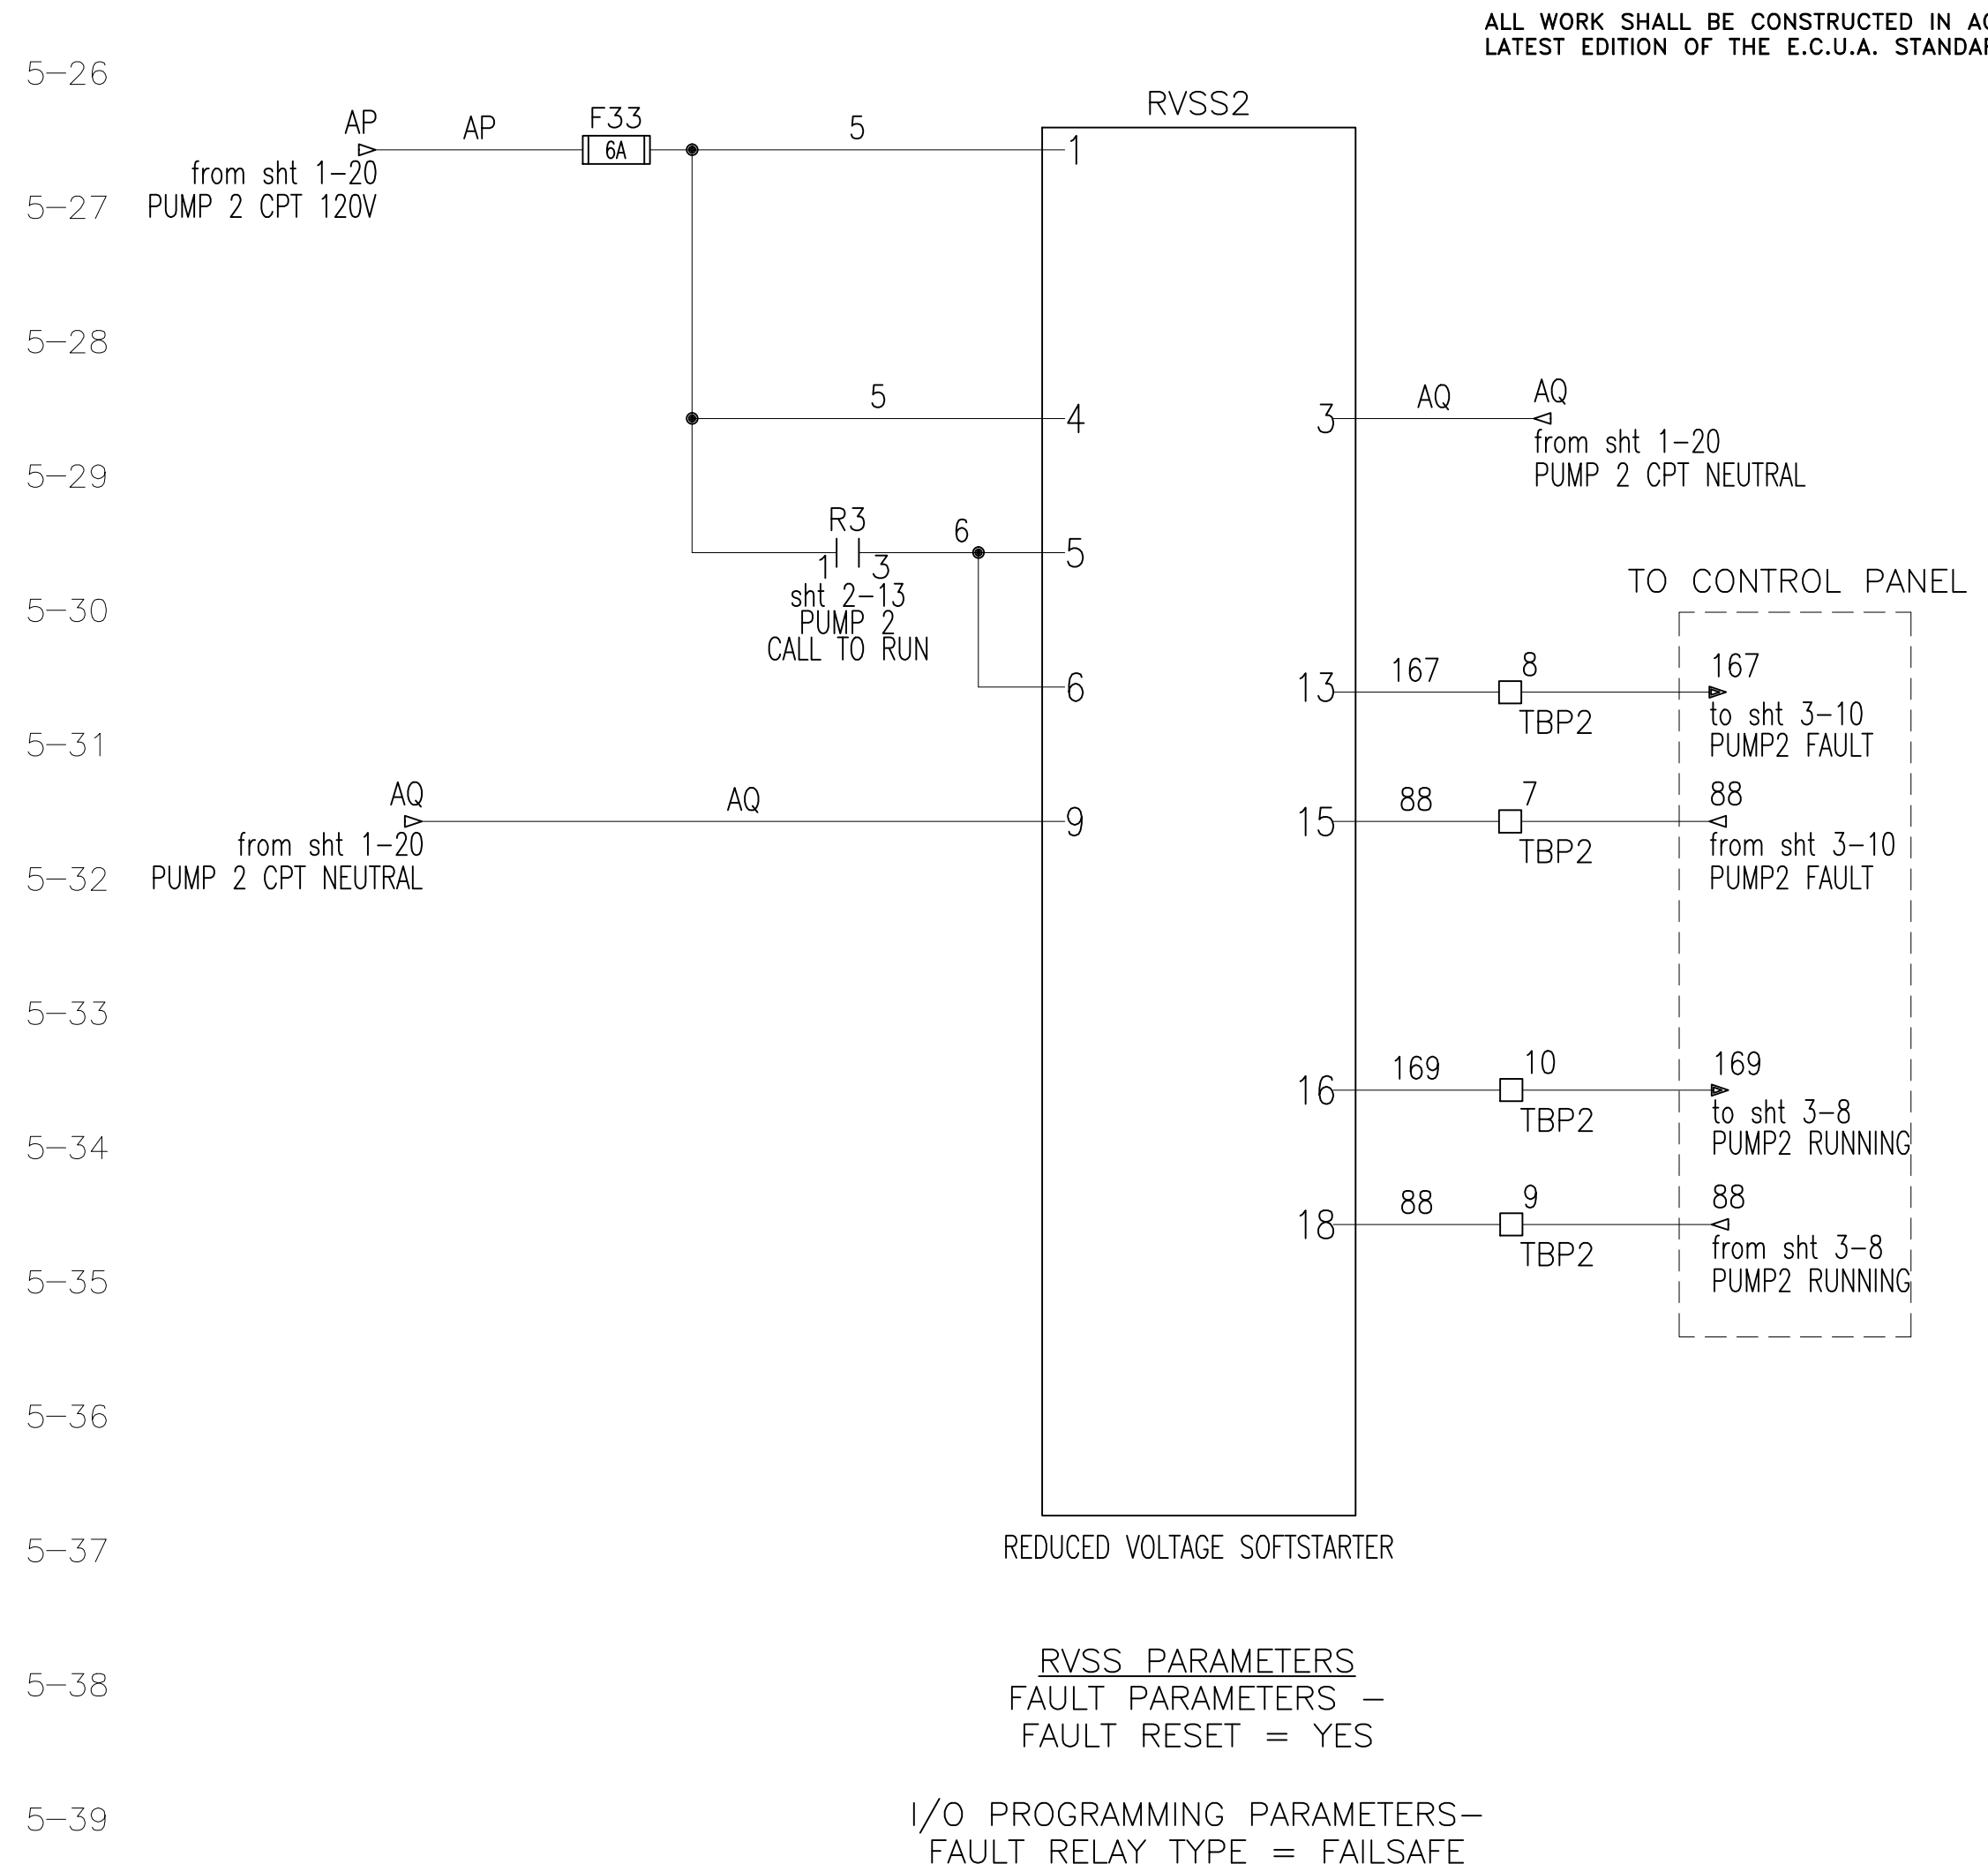

| REVISIONS | BY |
|-----------|----|
|           |    |
|           |    |
|           |    |
|           |    |

IMPROVEMENTS TO WASTEWATER COLLECTION SYSTEM

LIFT STATION CONSTRUCTION DETAILS





ELECTRICAL STANDARDS



APPROVED BY:

|                  |
|------------------|
| Drawn:           |
| Designed:        |
| Checked:         |
| Date: 12/18/2014 |
| Scale:           |
| Project No:      |
| Sheet No. 5      |
| Of 18 Sheets     |



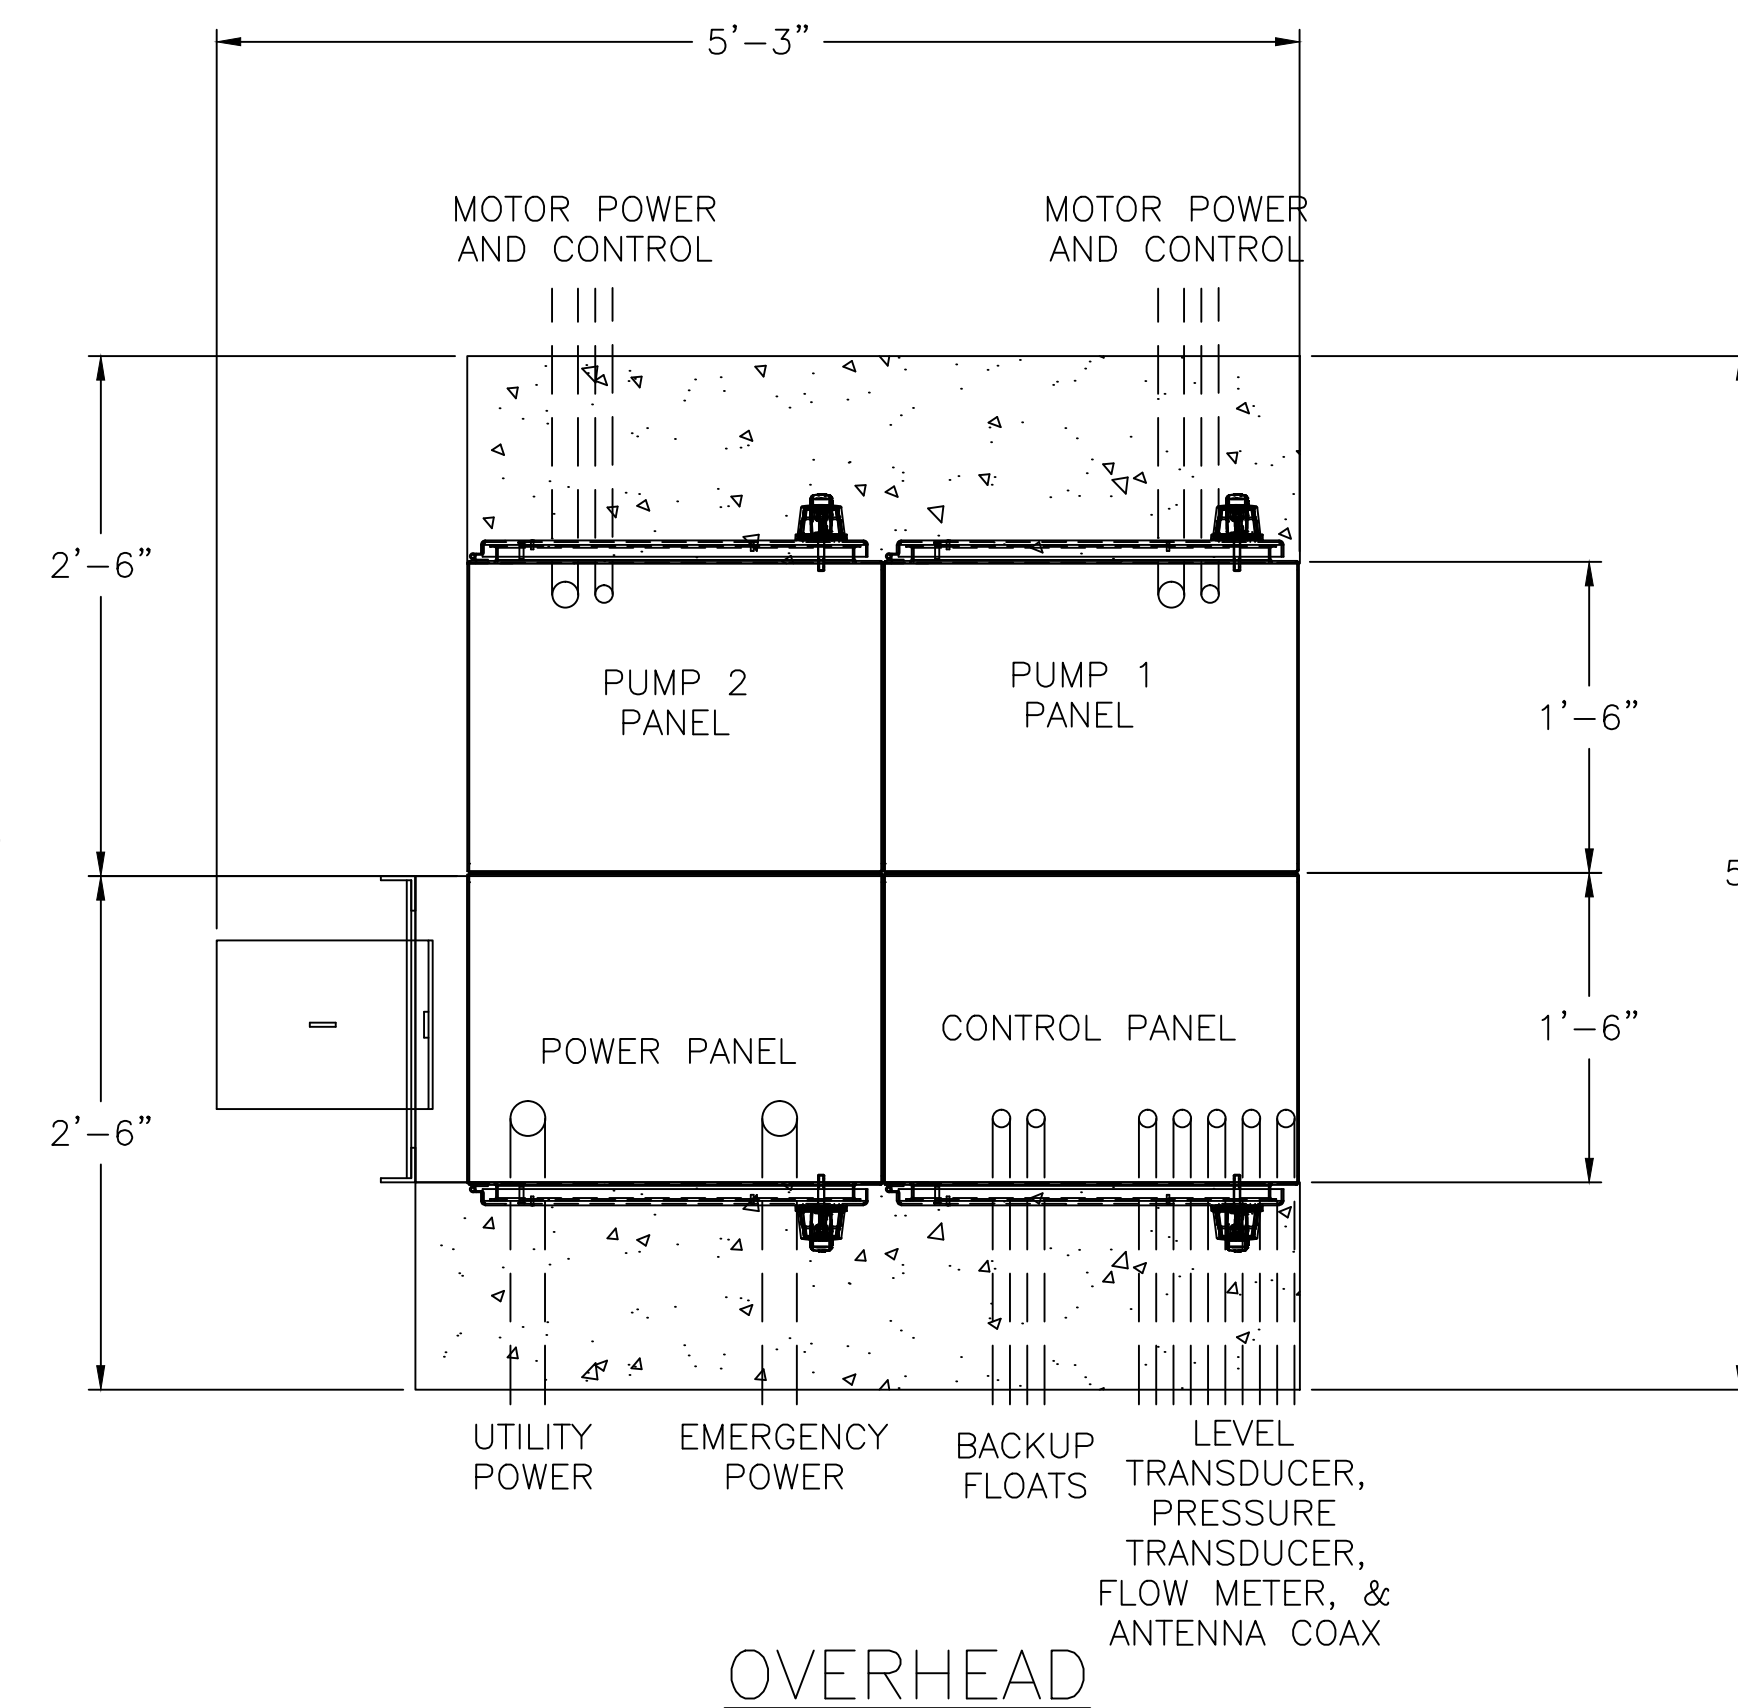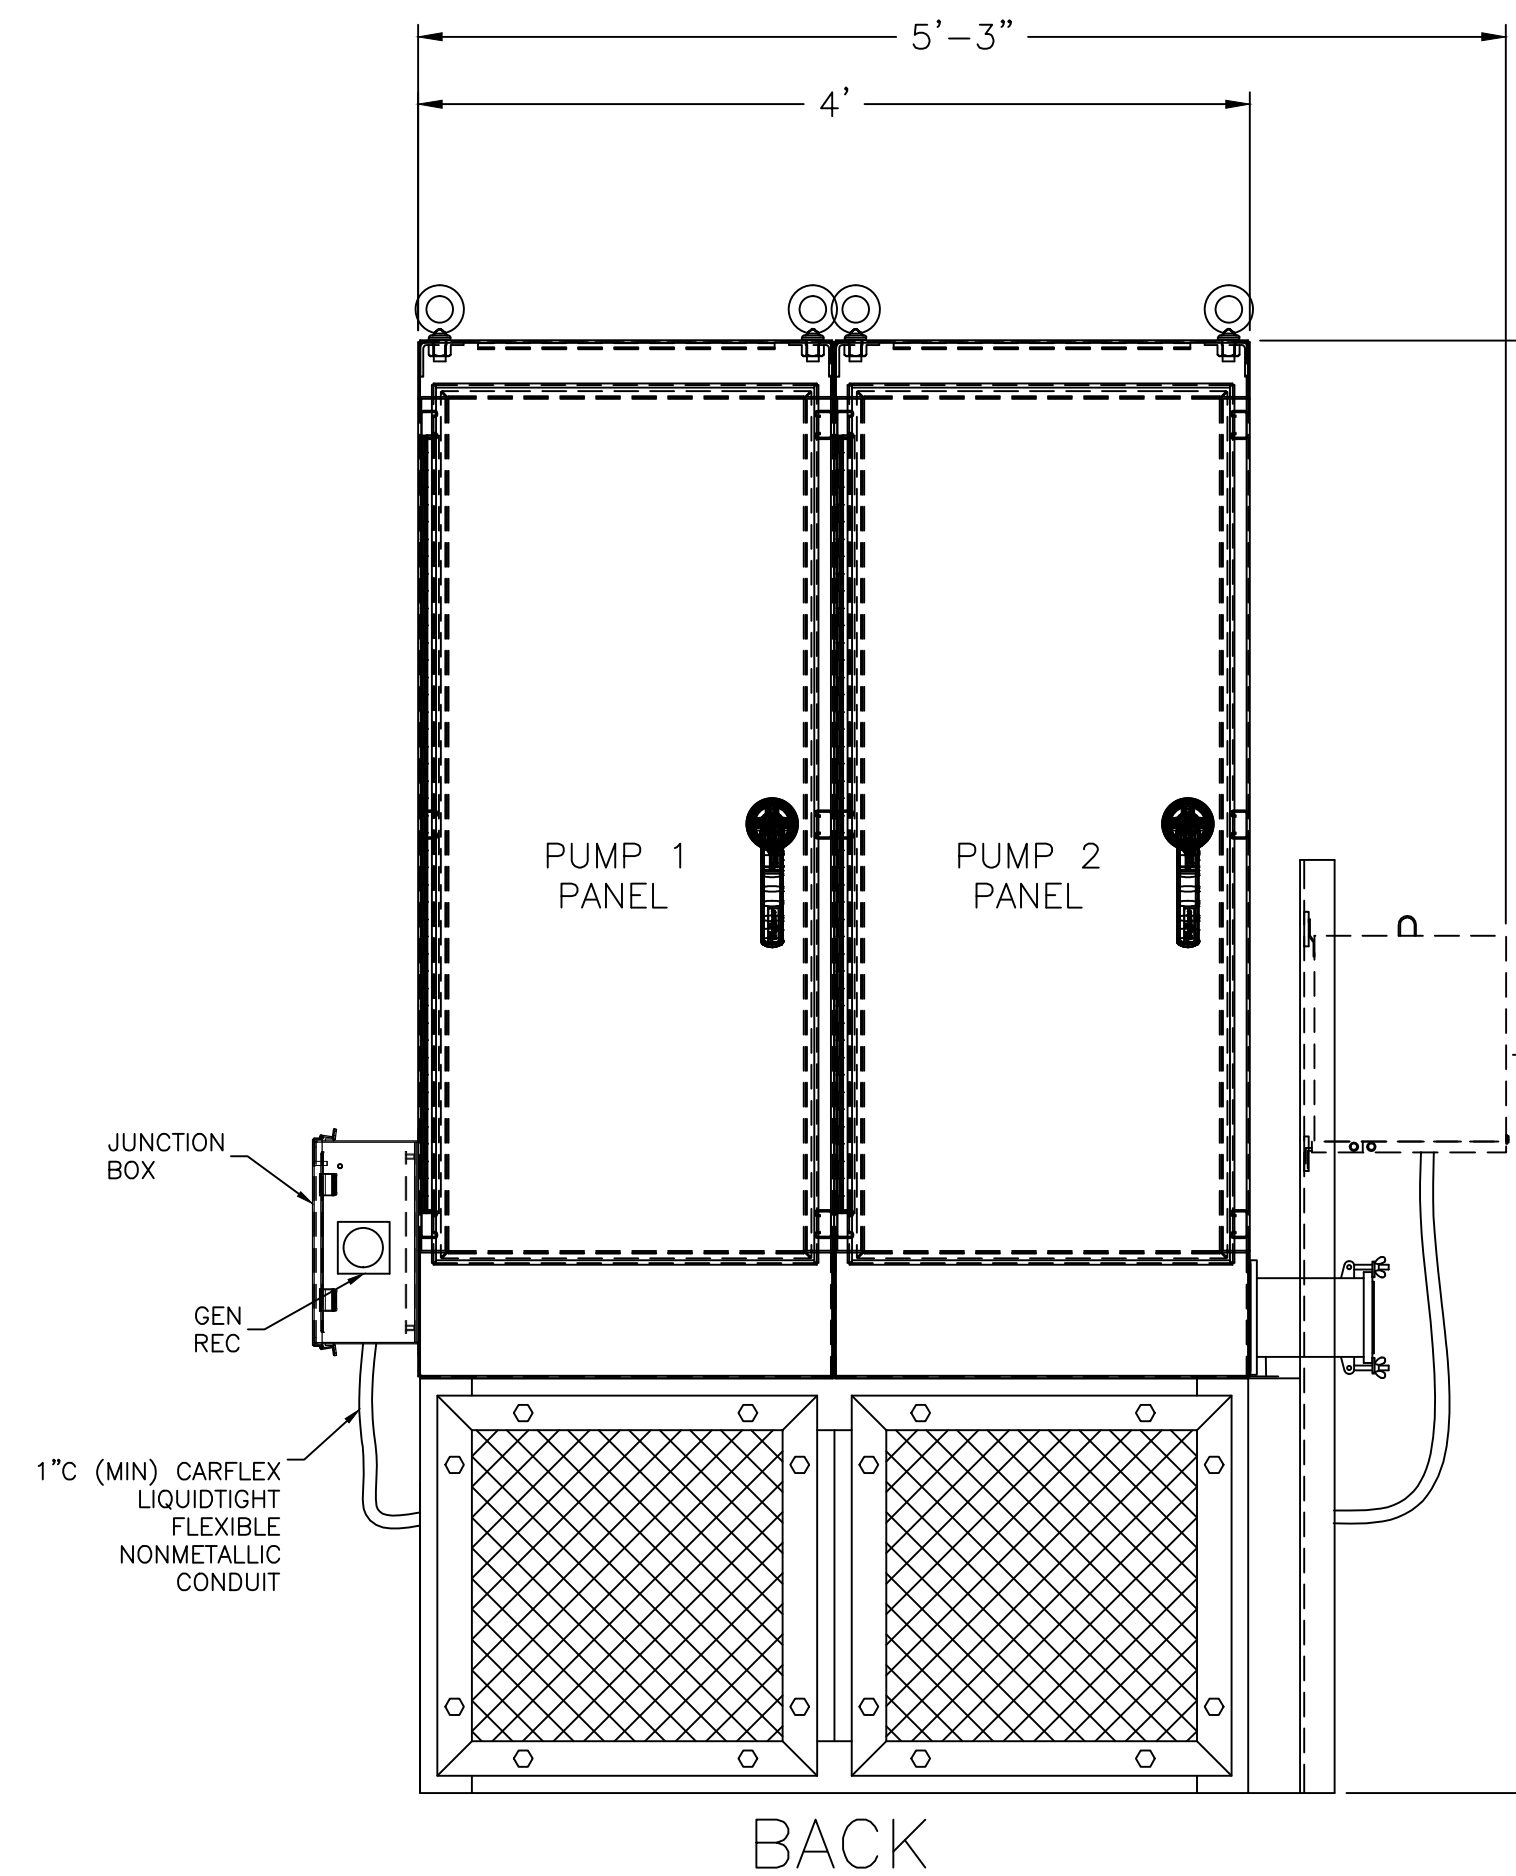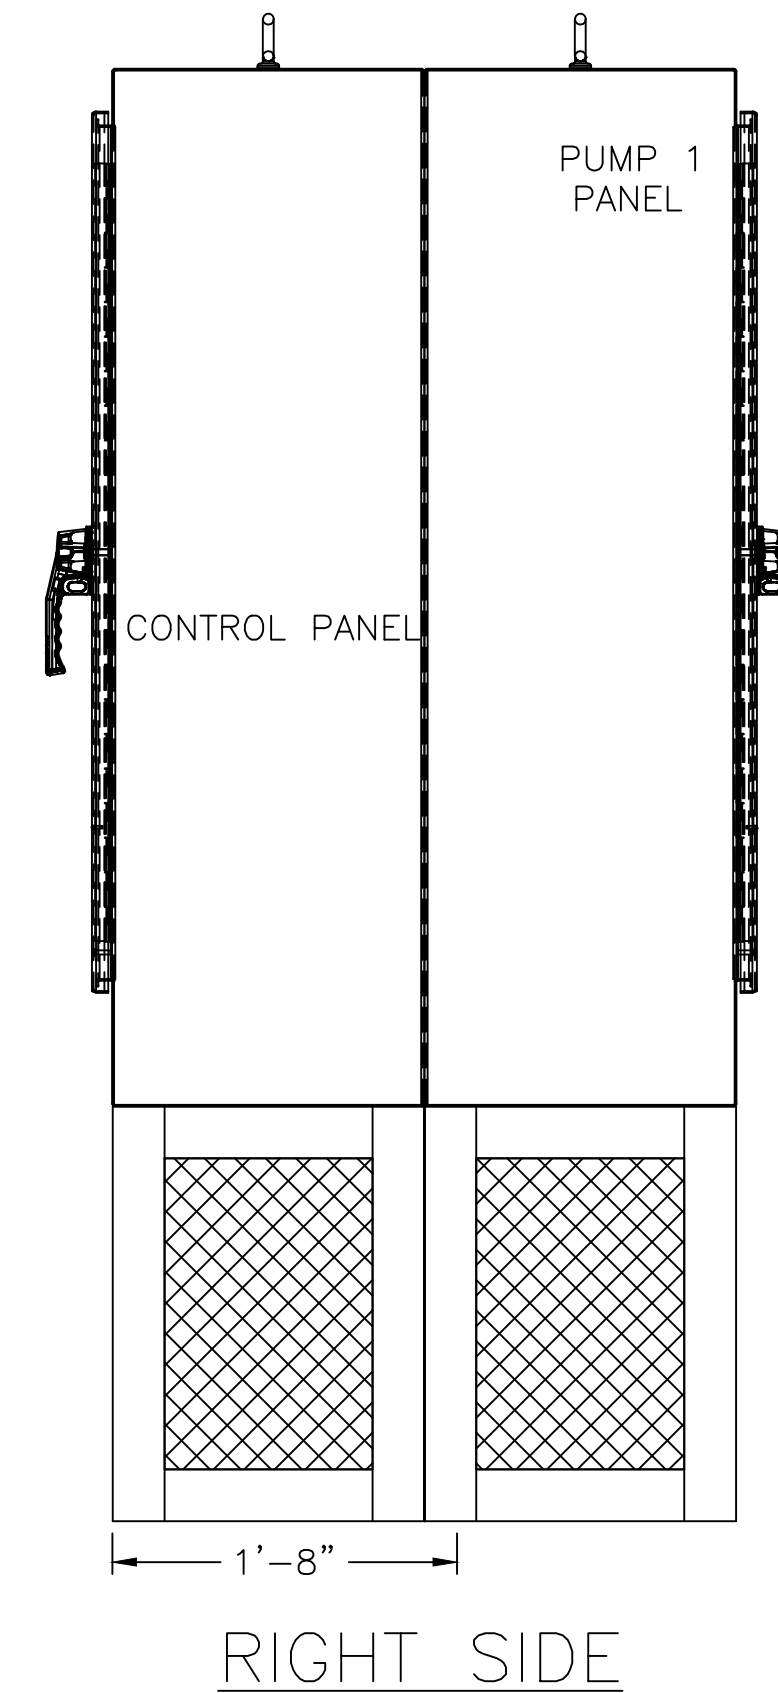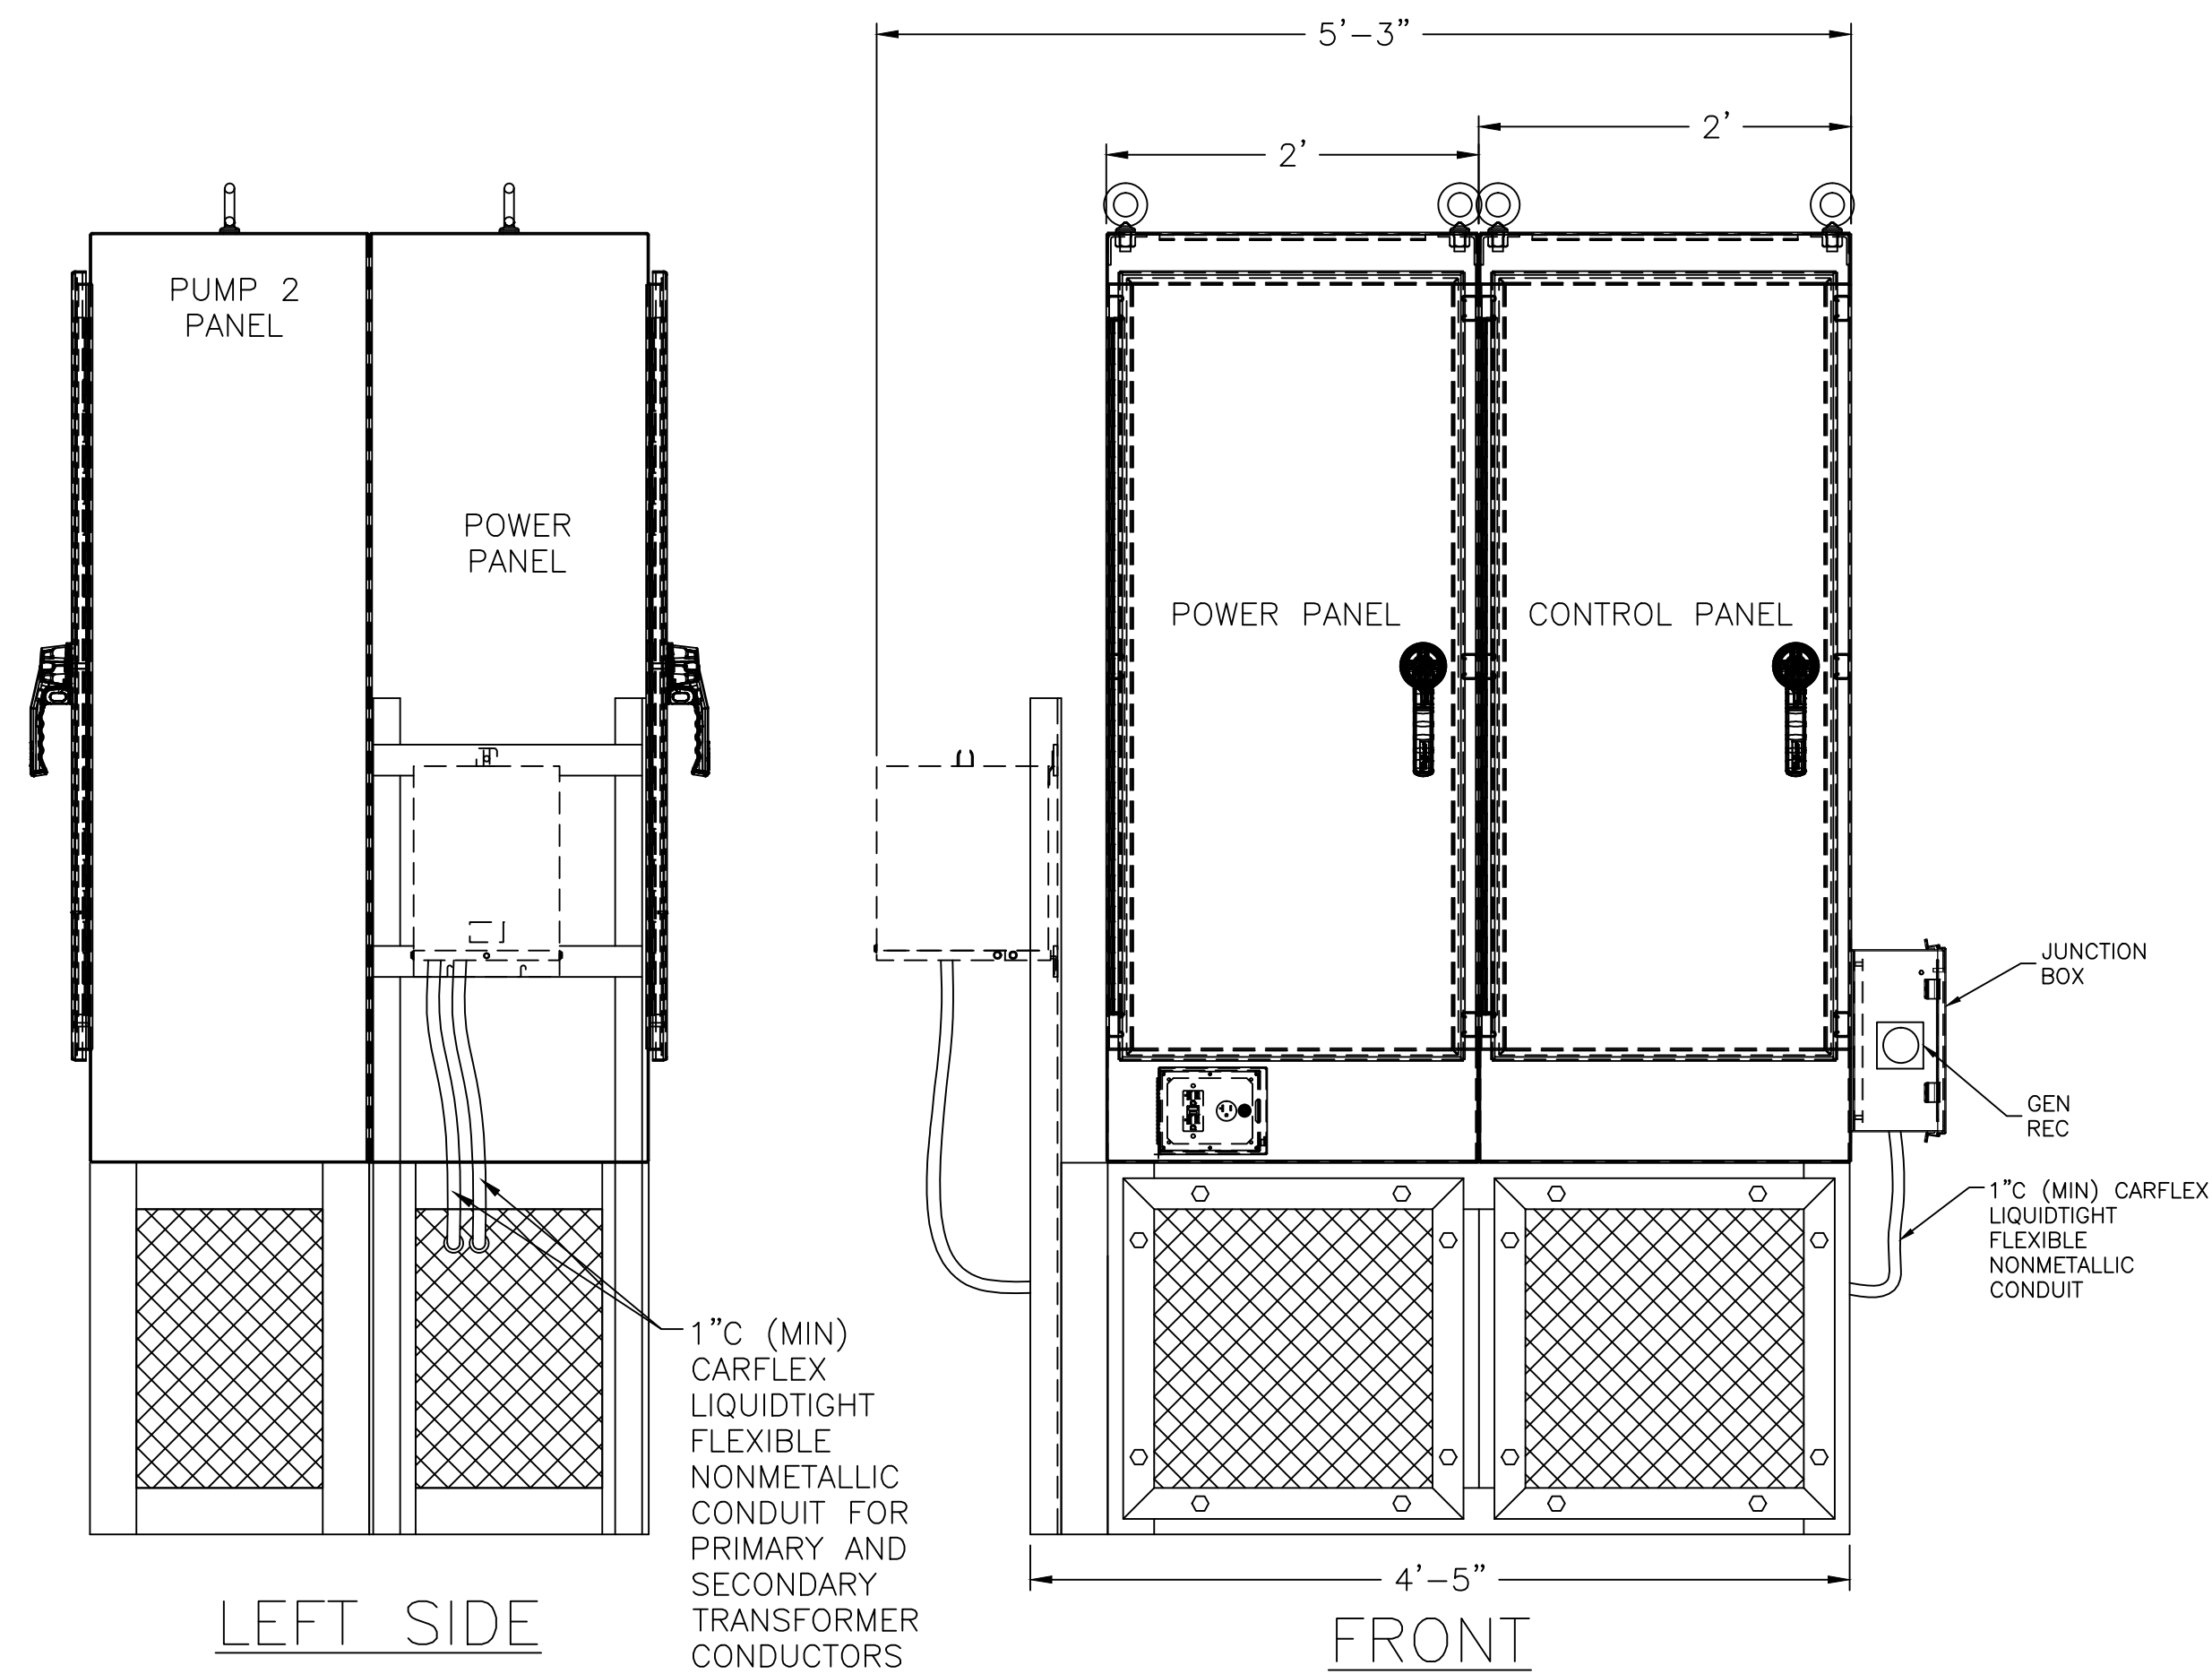

ALL WORK SHALL BE CONSTRUCTED IN ACCORDANCE WITH THE LATEST EDITION OF THE E.C.U.A. STANDARD SPECIFICATIONS

## NOTES

1. SEE SHEET 15 FOR SCHEDULES, LEGENDS AND PANEL TAGS.
2. GENERATOR RECEPTACLE TO BE ON SAME SIDE AS THE DRIVEWAY.

## ATTENTION

THIS LAYOUT IS ONE OF TWO (2) POSSIBLE CHOICES - SEE SHEET 7 FOR THE OTHER OPTION. IF THIS LAYOUT OPTION IS SELECTED, SEE SHEET 14A FOR ASSOCIATED RACK DETAILS.

| REVISIONS | BY |
|-----------|----|
|           |    |
|           |    |
|           |    |
|           |    |

# IMPROVEMENTS TO WASTEWATER COLLECTION SYSTEM LIFT STATION CONSTRUCTION DETAILS ELECTRICAL STANDARDS



APPROVED BY:

|                  |
|------------------|
| Drawn:           |
| Designed:        |
| Checked:         |
| Date: 12/18/2014 |
| Scale:           |
| Project No:      |
| Sheet No. 7A     |
| Of 18 Sheets     |

ALL WORK SHALL BE CONSTRUCTED IN ACCORDANCE WITH THE LATEST EDITION OF THE E.C.U.A. STANDARD SPECIFICATIONS

NOTES

- 1. SEE SHEET 15 FOR SCHEDULES, LEGENDS AND PANEL TAGS.
- 2. LAYOUT OF THE POWER & STARTER SECTIONS DEPICTS THE LARGEST POSSIBLE HORSEPOWER CONFIGURATION.

| REVISIONS | BY |
|-----------|----|
|           |    |
|           |    |
|           |    |
|           |    |


IMPROVEMENTS TO WASTEWATER COLLECTION SYSTEM  
LIFT STATION CONSTRUCTION DETAILS  
ELECTRICAL STANDARDS




APPROVED BY:

|                  |
|------------------|
| Drawn:           |
| Designed:        |
| Checked:         |
| Date: 12/18/2014 |
| Scale:           |
| Project No:      |
| Sheet No. 8      |
| Of 18 Sheets     |


POWER ENCLOSURE  
LEFT SIDE PANEL  
LAYOUT

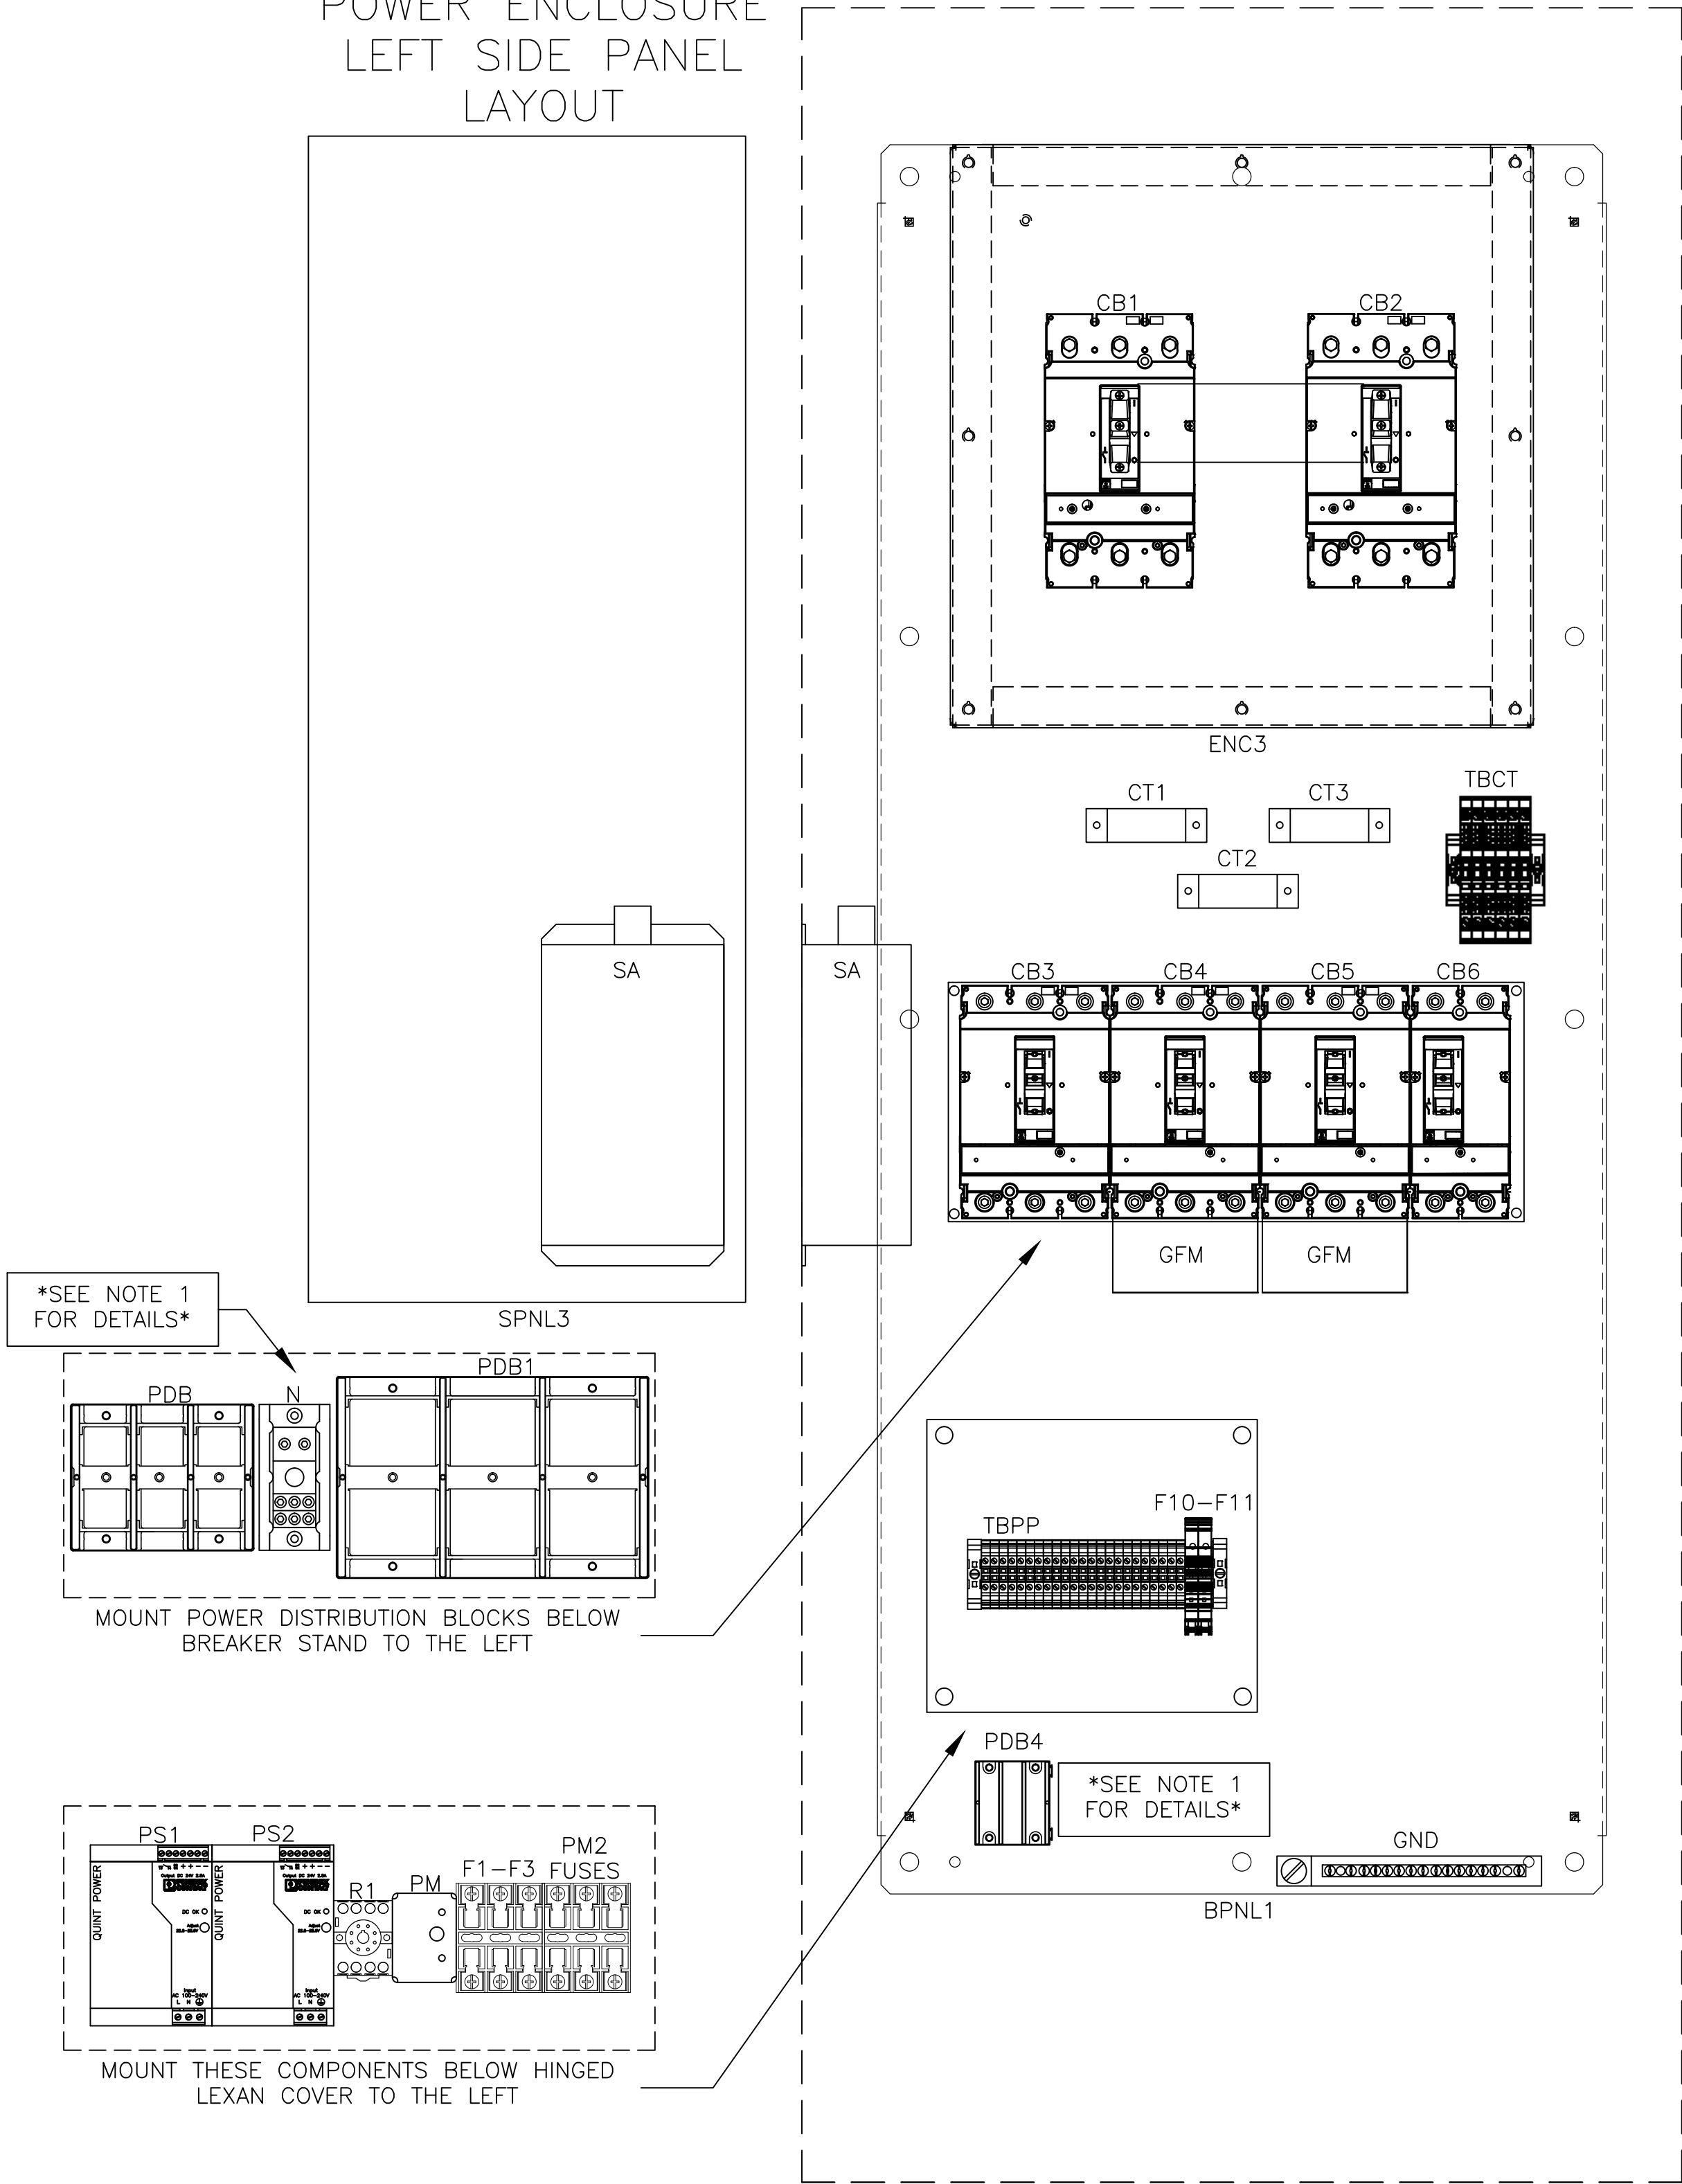

POWER ENCLOSURE  
BACKPANEL LAYOUT

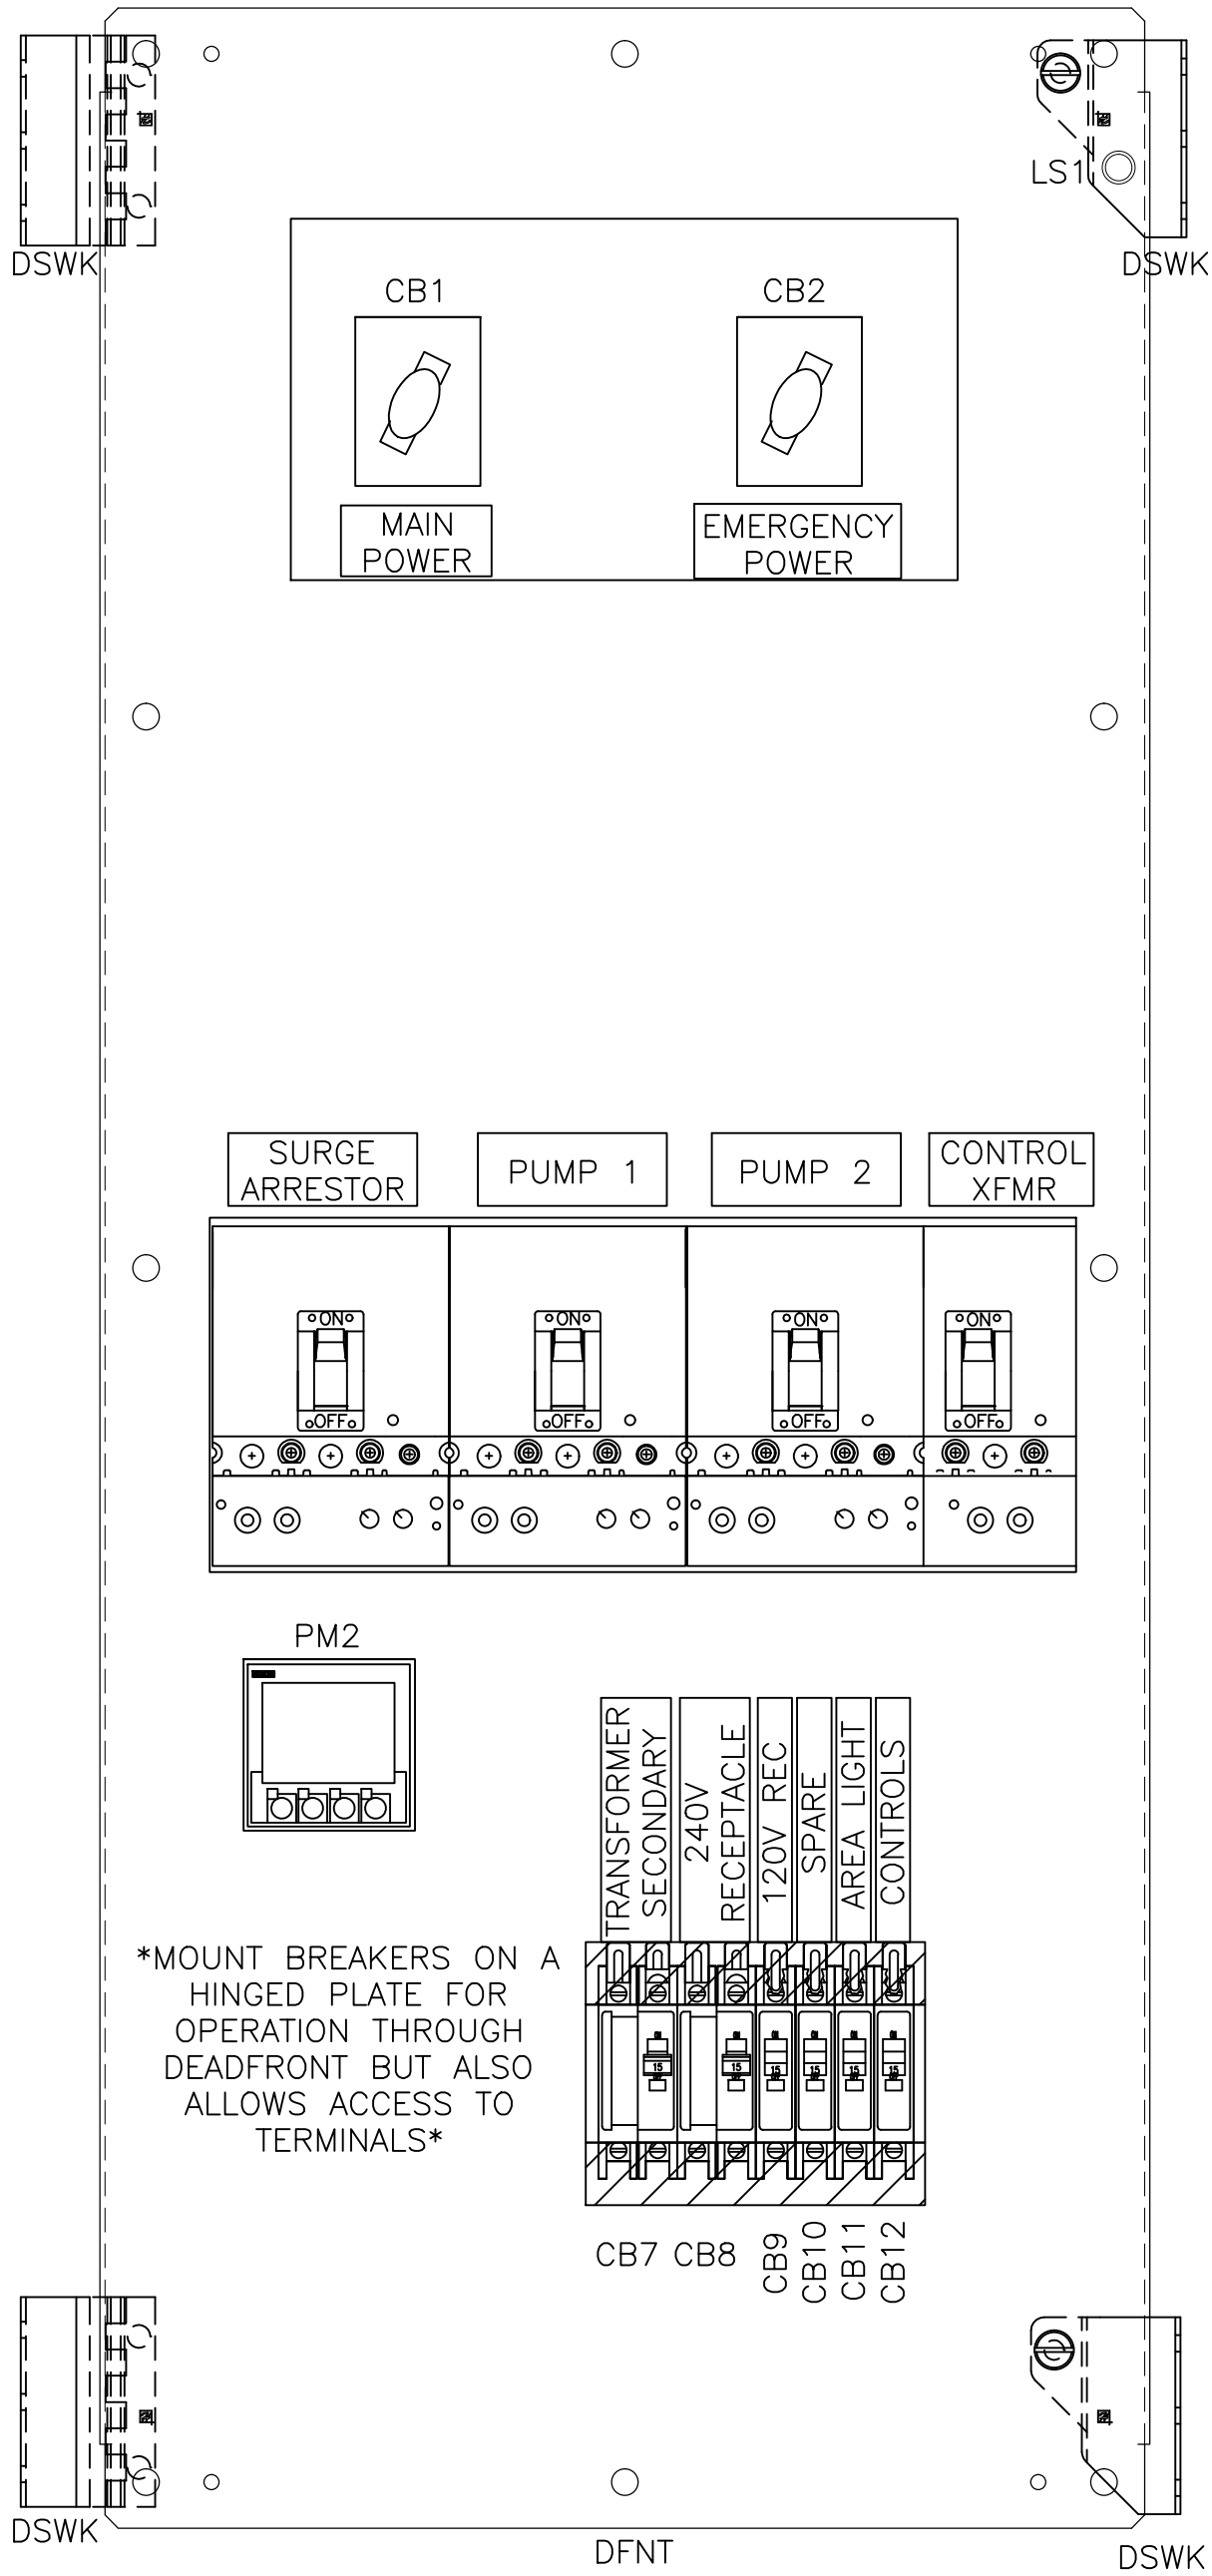


POWER ENCLOSURE  
DEADFRONT LAYOUT

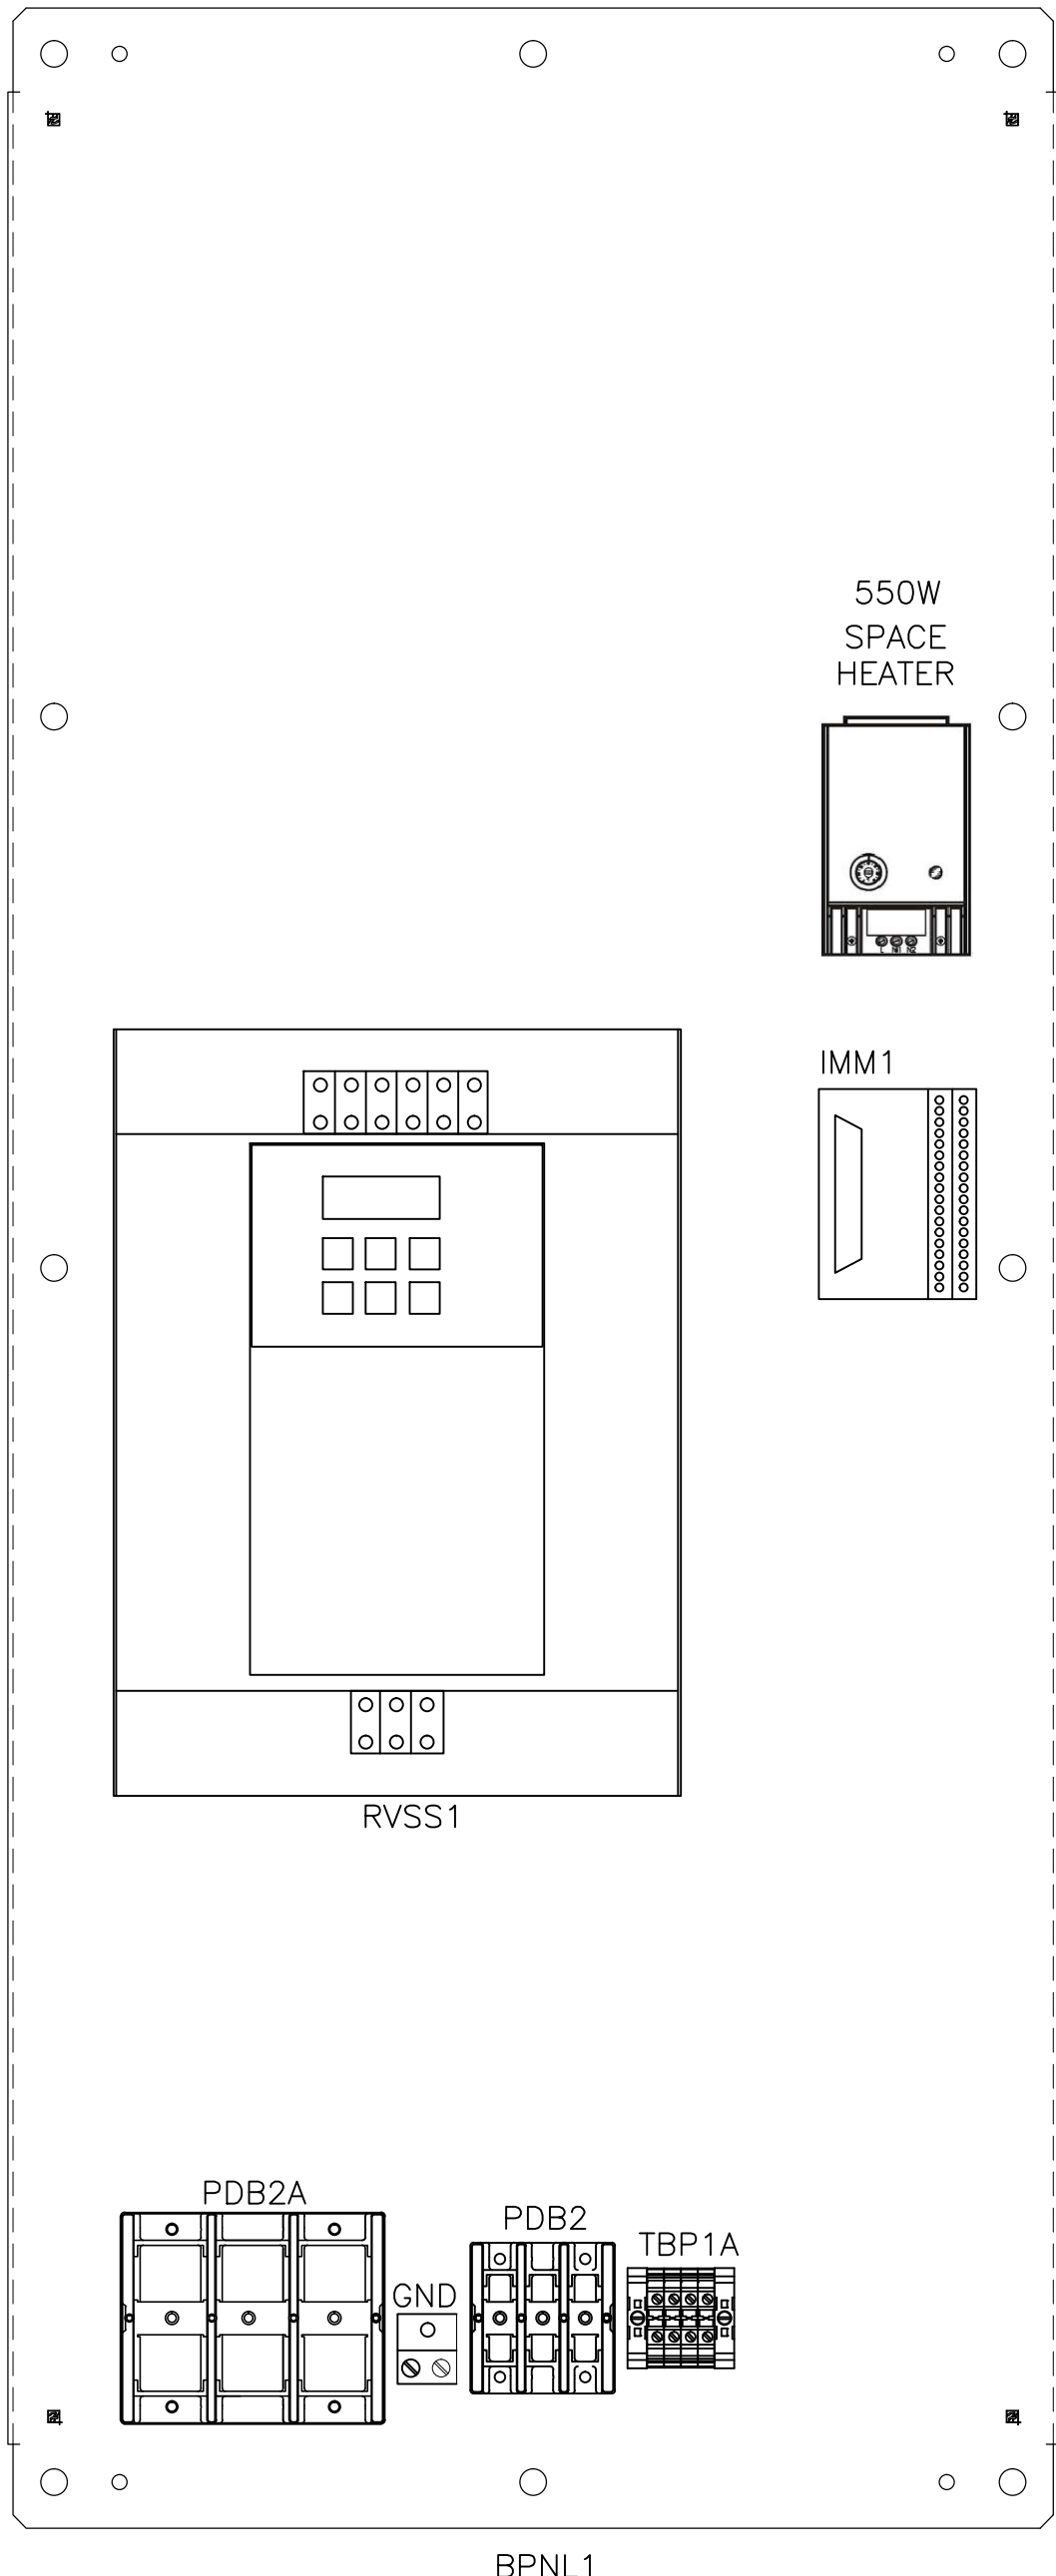

PUMP 1 ENCLOSURE  
BACKPANEL LAYOUT

\*SEE SHEET 9 FOR SIDE  
PANEL LAYOUTS

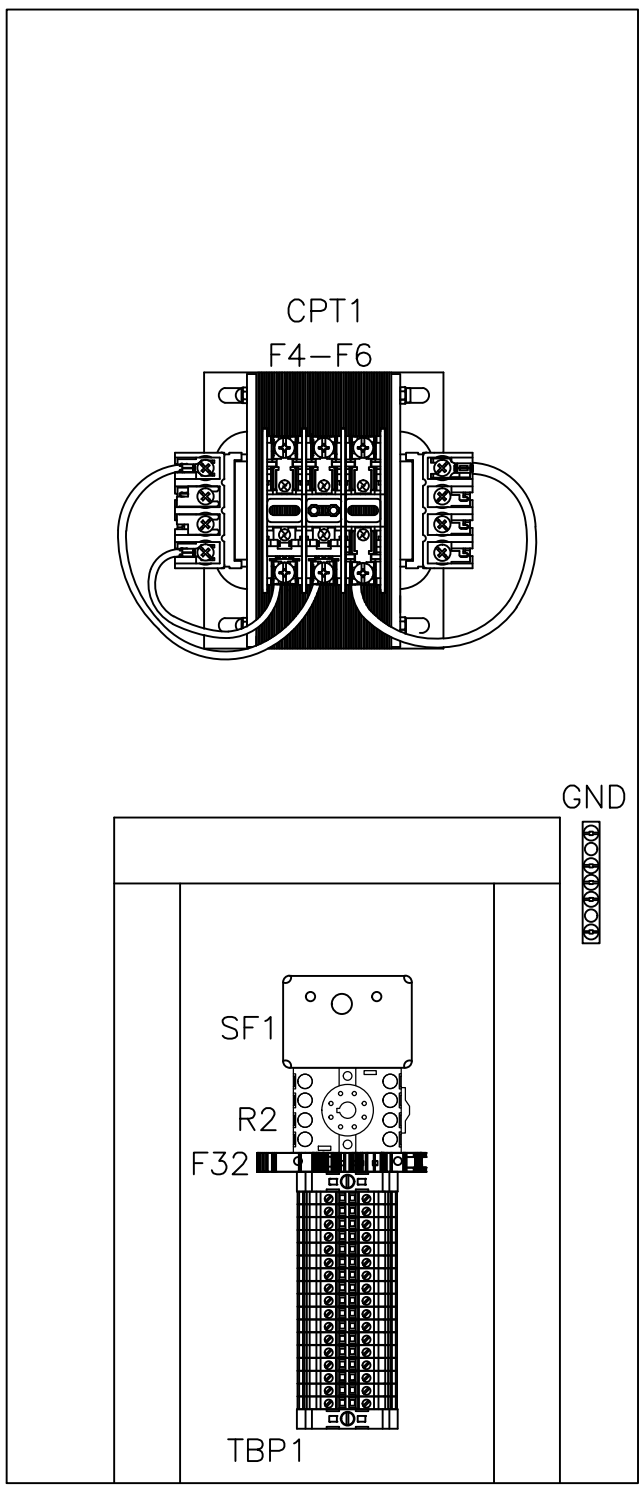

PUMP 1 ENCLOSURE  
RIGHT SIDE-PANEL  
LAYOUT

ALL WORK SHALL BE CONSTRUCTED IN ACCORDANCE WITH THE LATEST EDITION OF THE E.C.U.A. STANDARD SPECIFICATIONS

NOTES

- 1. SEE SHEET 15 FOR SCHEDULES, LEGENDS AND PANEL TAGS.
- 2. LAYOUT OF THE VFD SECTION DEPICTS THE LARGEST POSSIBLE HORSEPOWER CONFIGURATION.


| REVISIONS | BY |
|-----------|----|
|           |    |
|           |    |
|           |    |
|           |    |

IMPROVEMENTS TO WASTEWATER COLLECTION SYSTEM  
LIFT STATION CONSTRUCTION DETAILS  
ELECTRICAL STANDARDS




APPROVED BY:


|                  |
|------------------|
| Drawn:           |
| Designed:        |
| Checked:         |
| Date: 12/18/2014 |
| Scale:           |
| Project No:      |
| Sheet No. 9      |
| Of 18 Sheets     |

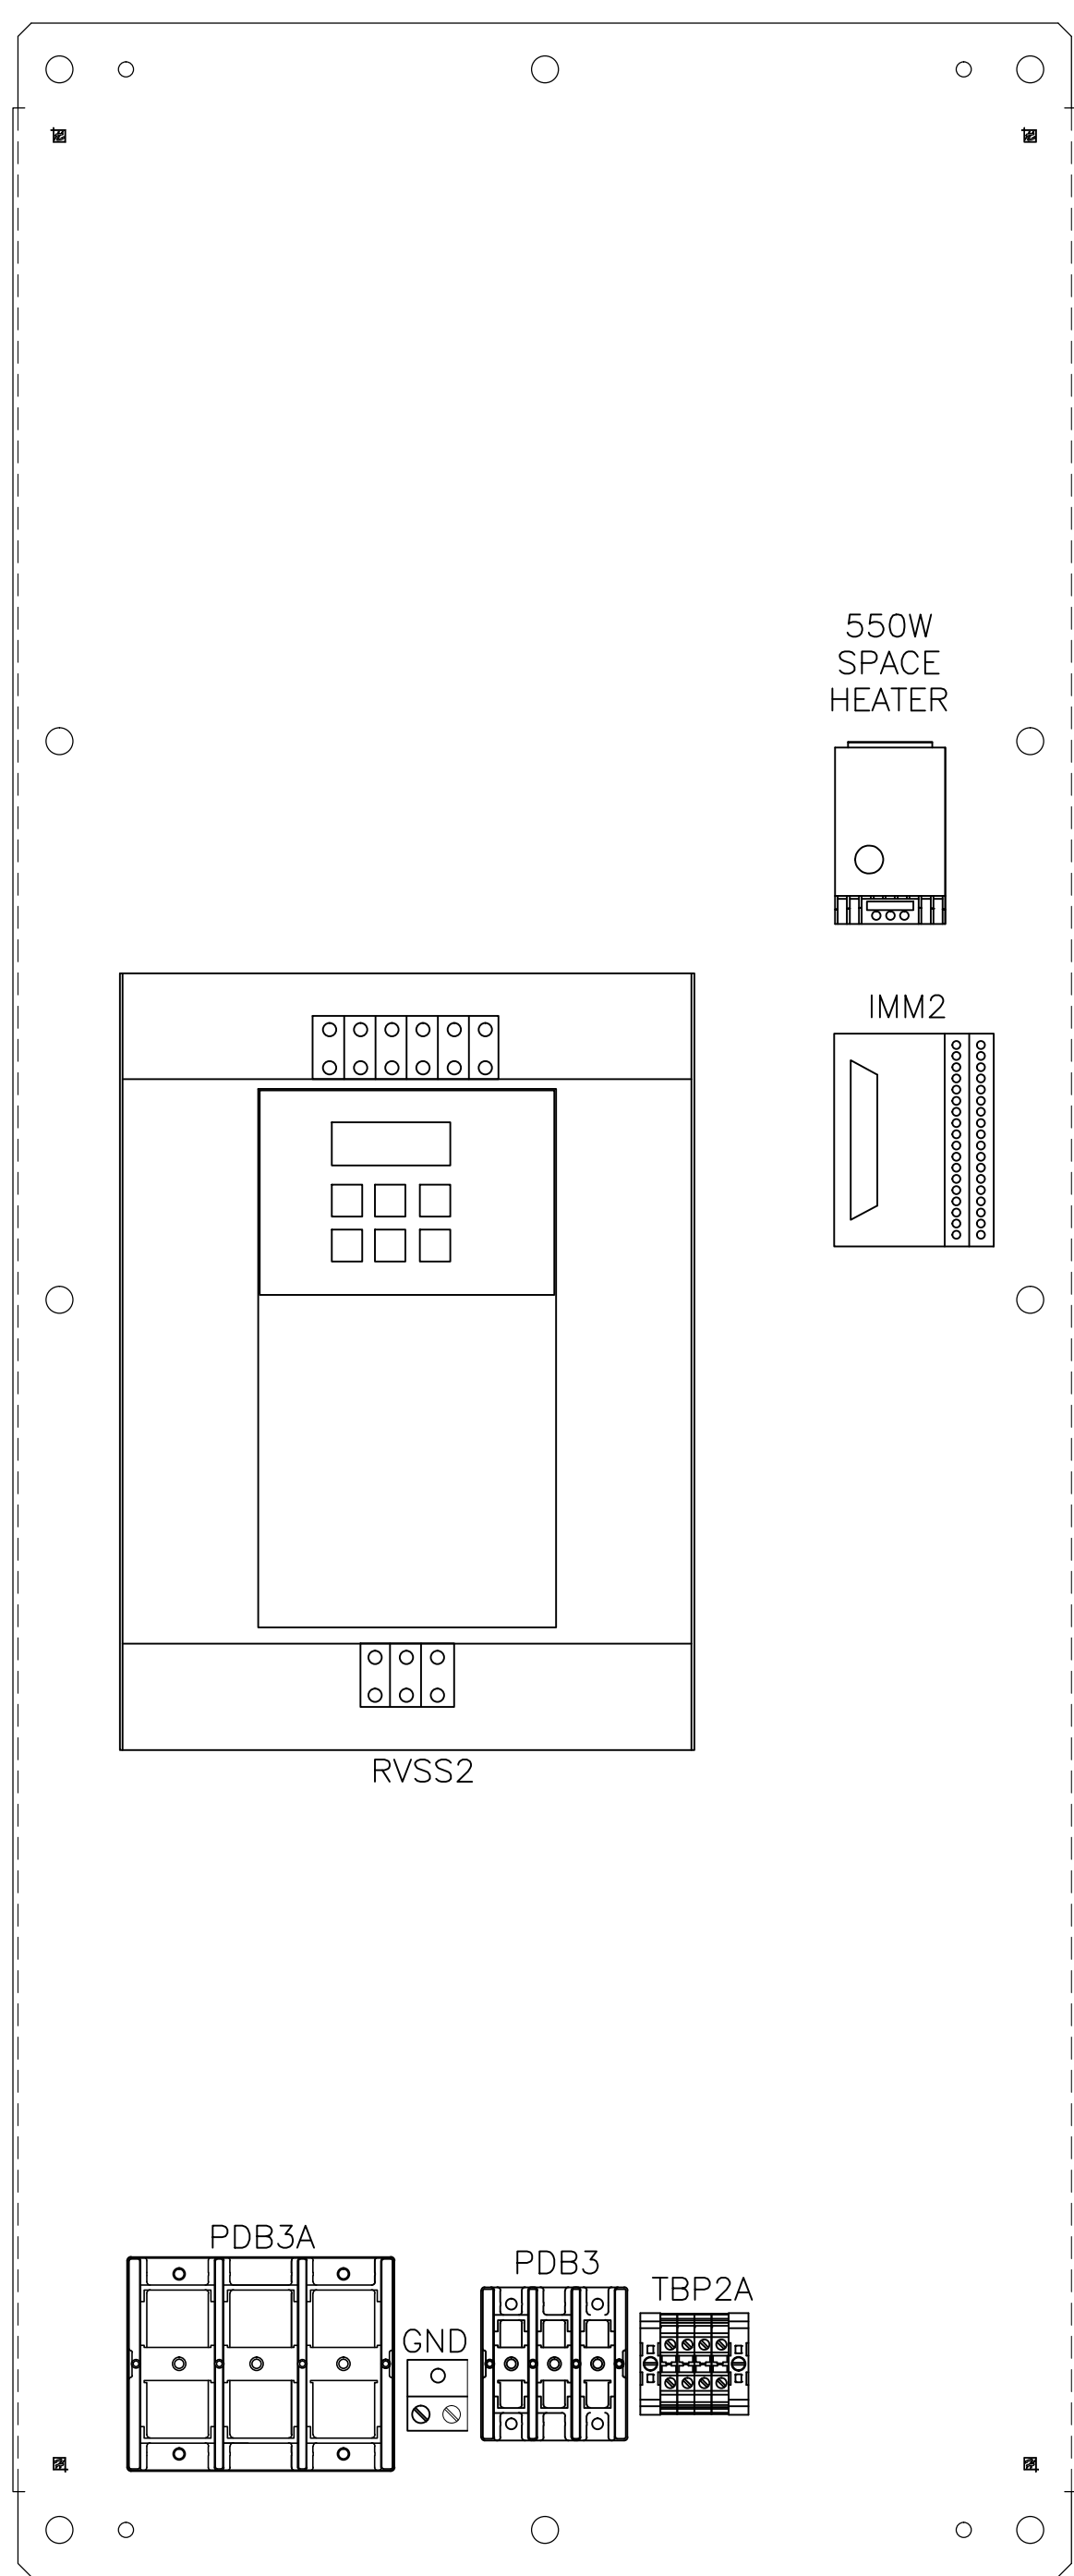


PUMP 2 ENCLOSURE  
BACKPANEL LAYOUT

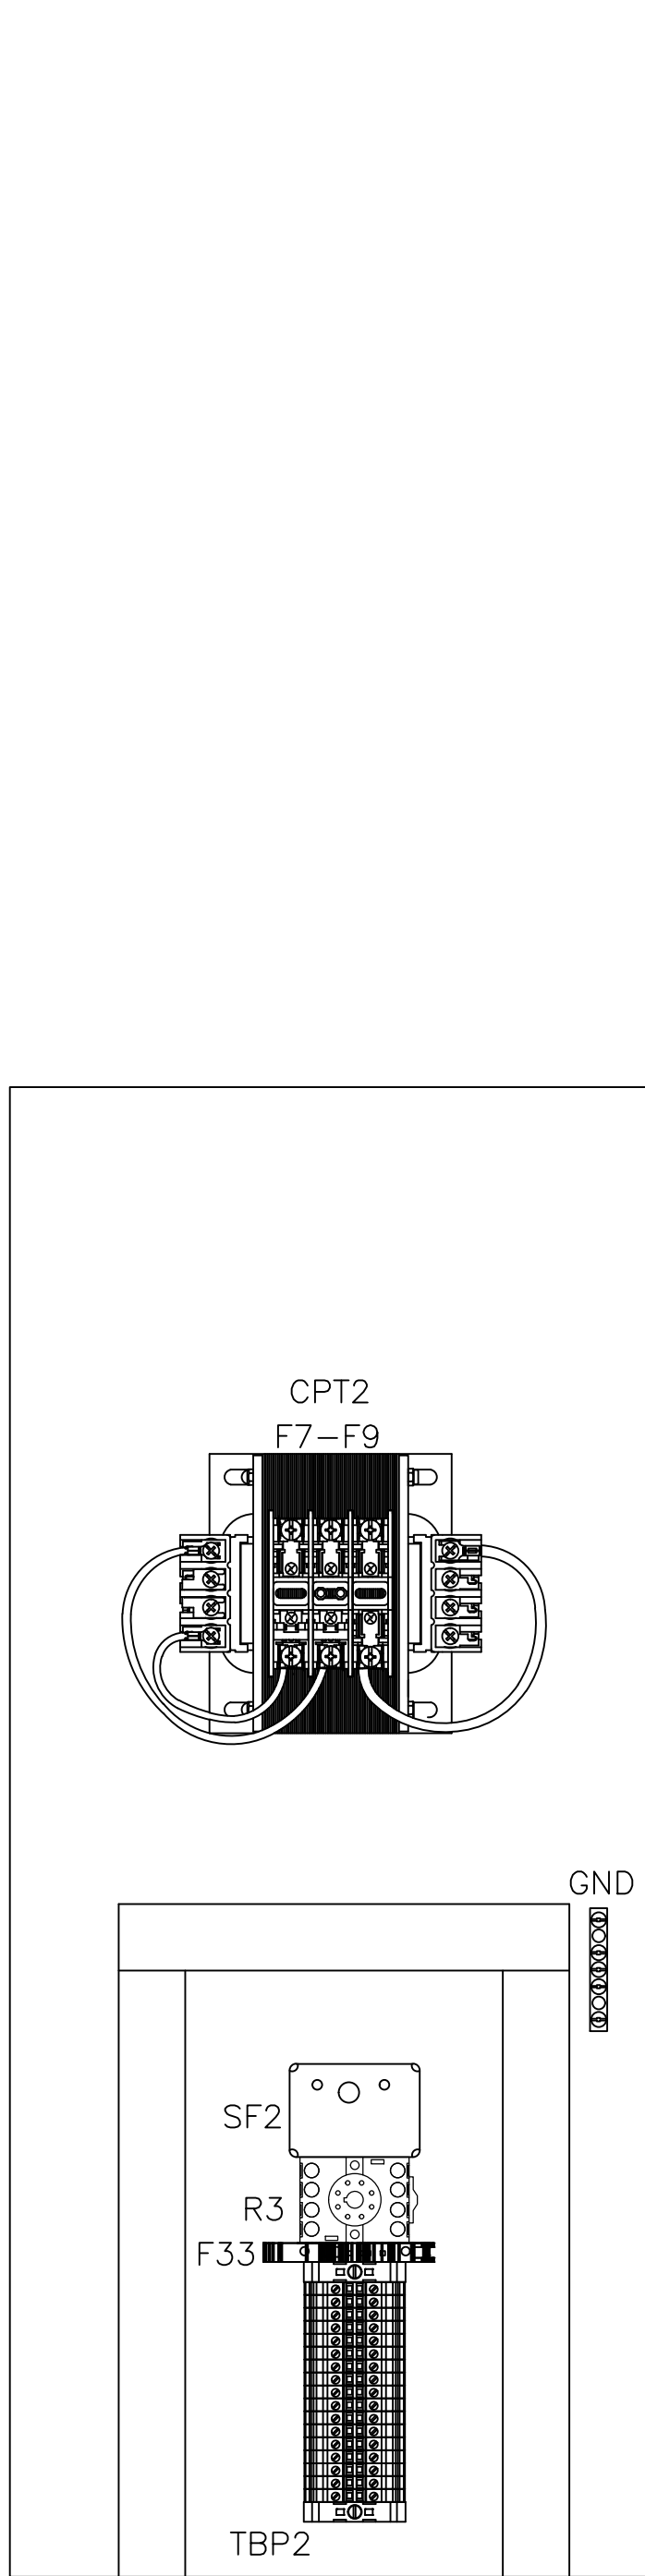


PUMP 2 ENCLOSURE  
RIGHT SIDEPANEL LAYOUT

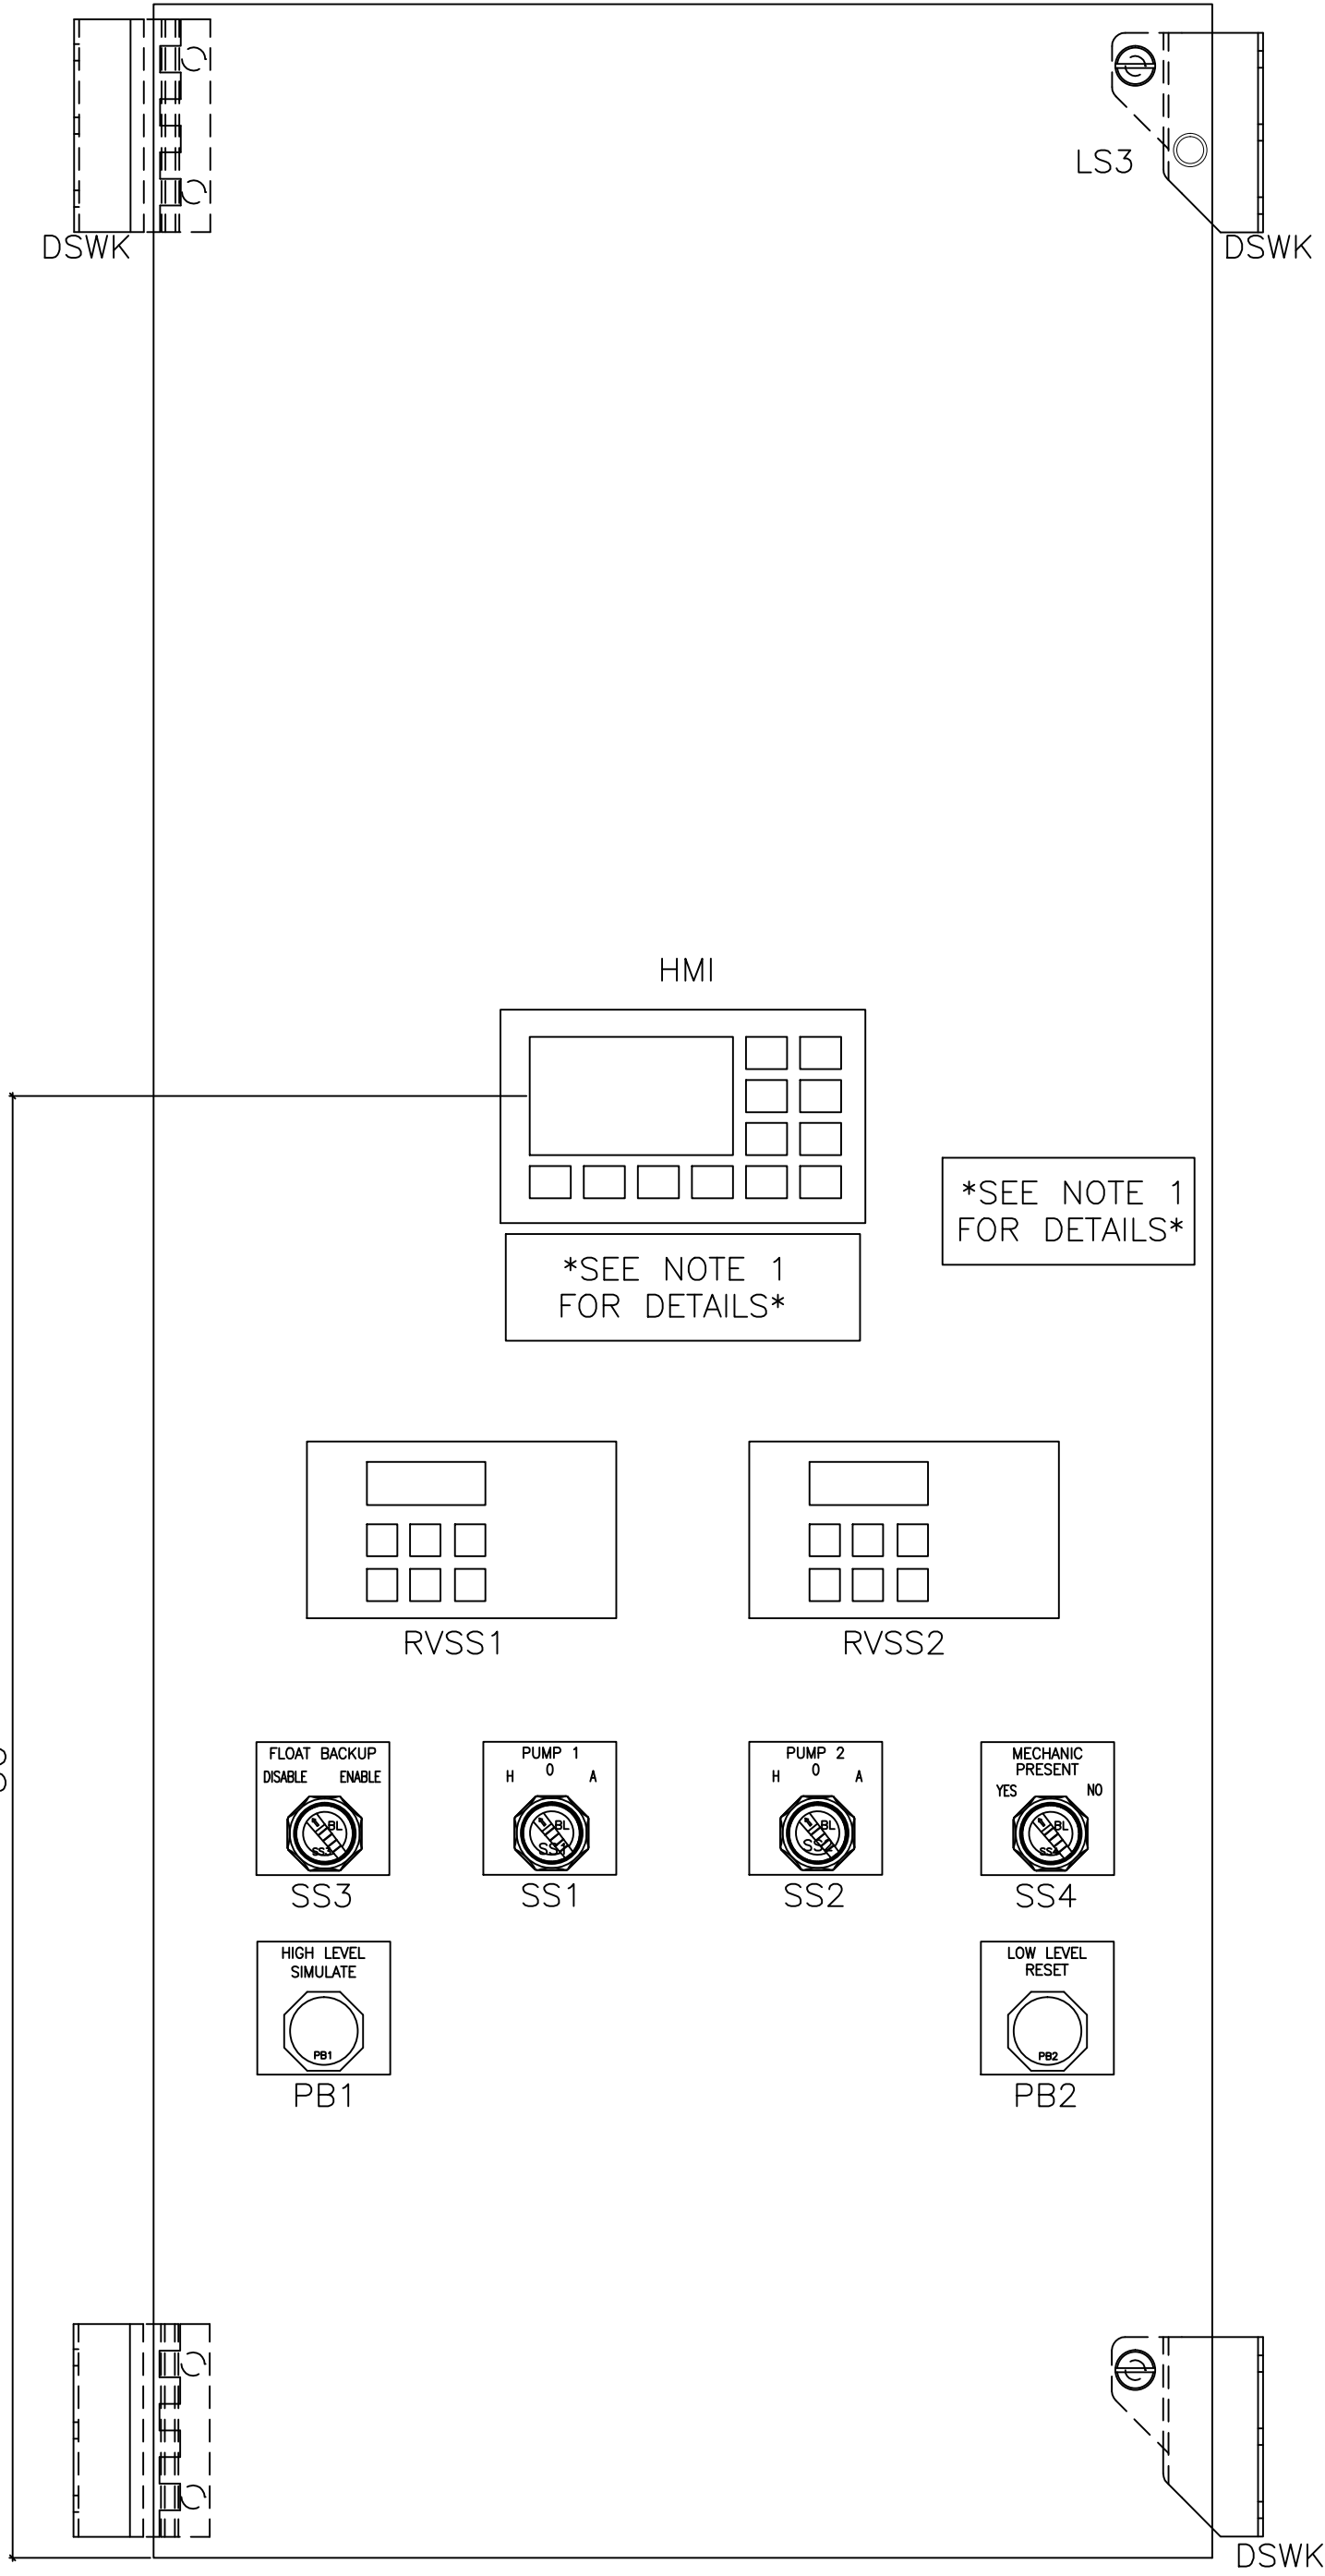


CONTROL PANEL  
DEADFRONT LAYOUT

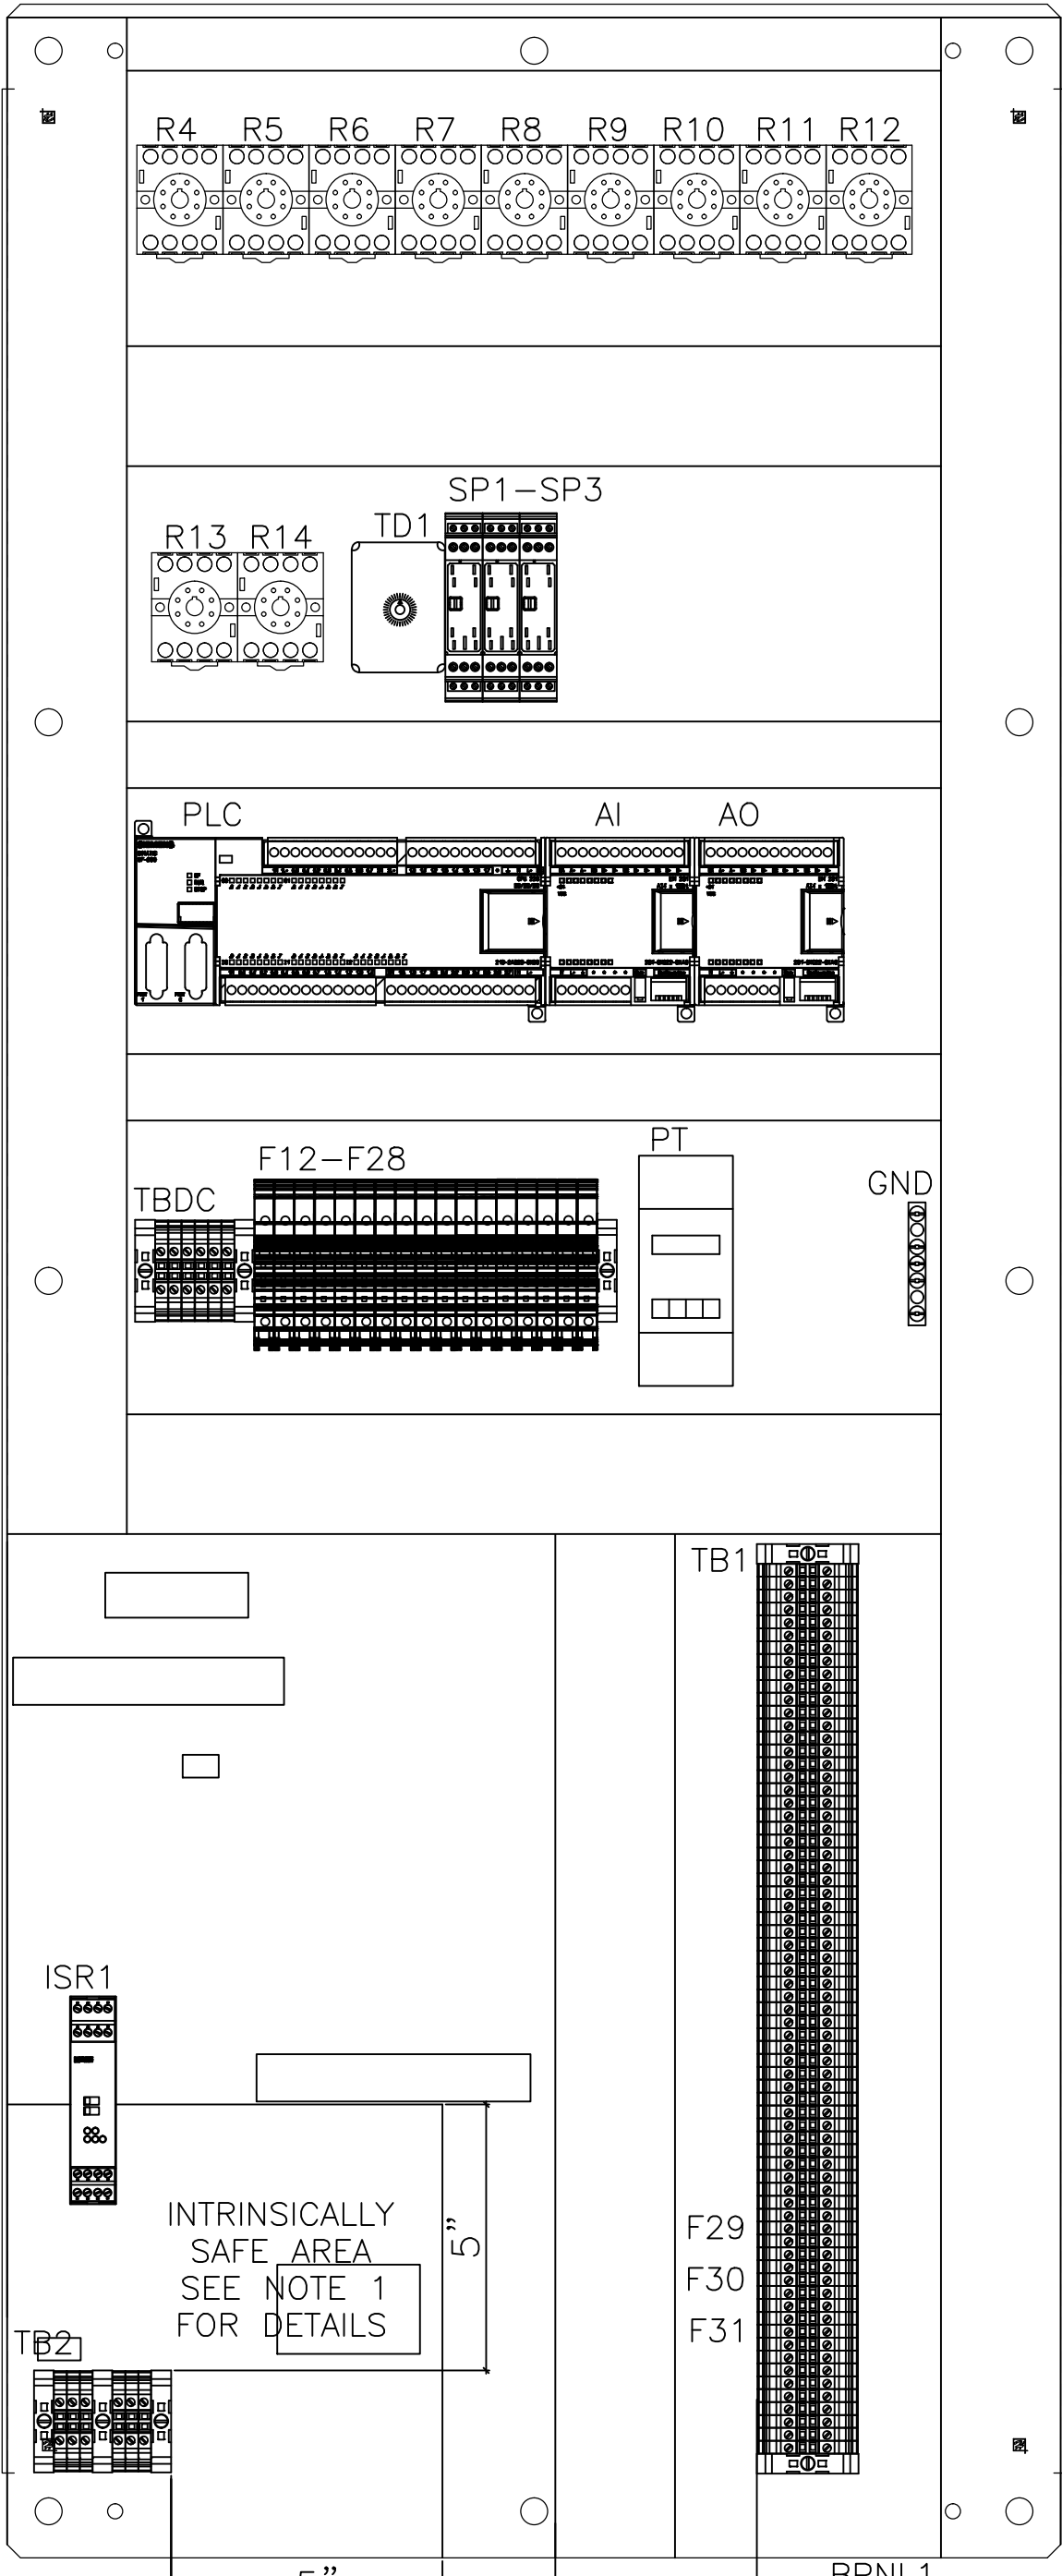

CONTROL ENCLOSURE  
BACKPANEL LAYOUT

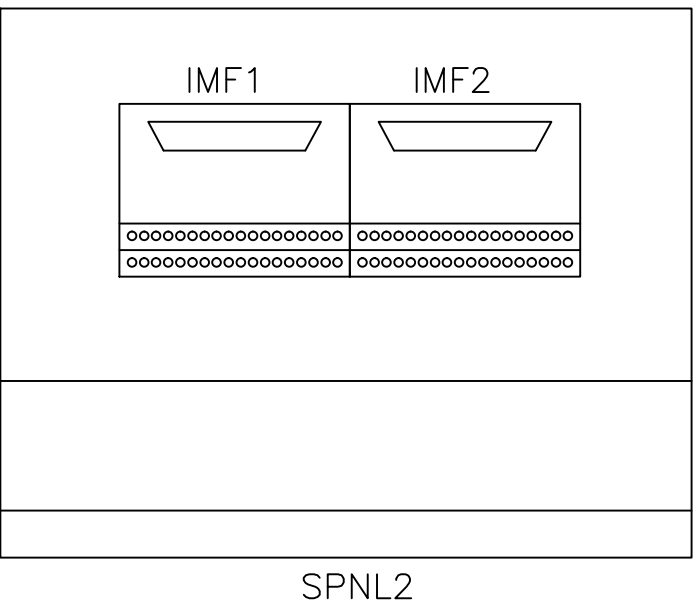

CONTROL ENCLOSURE  
LEFT SIDEPANEL LAYOUT

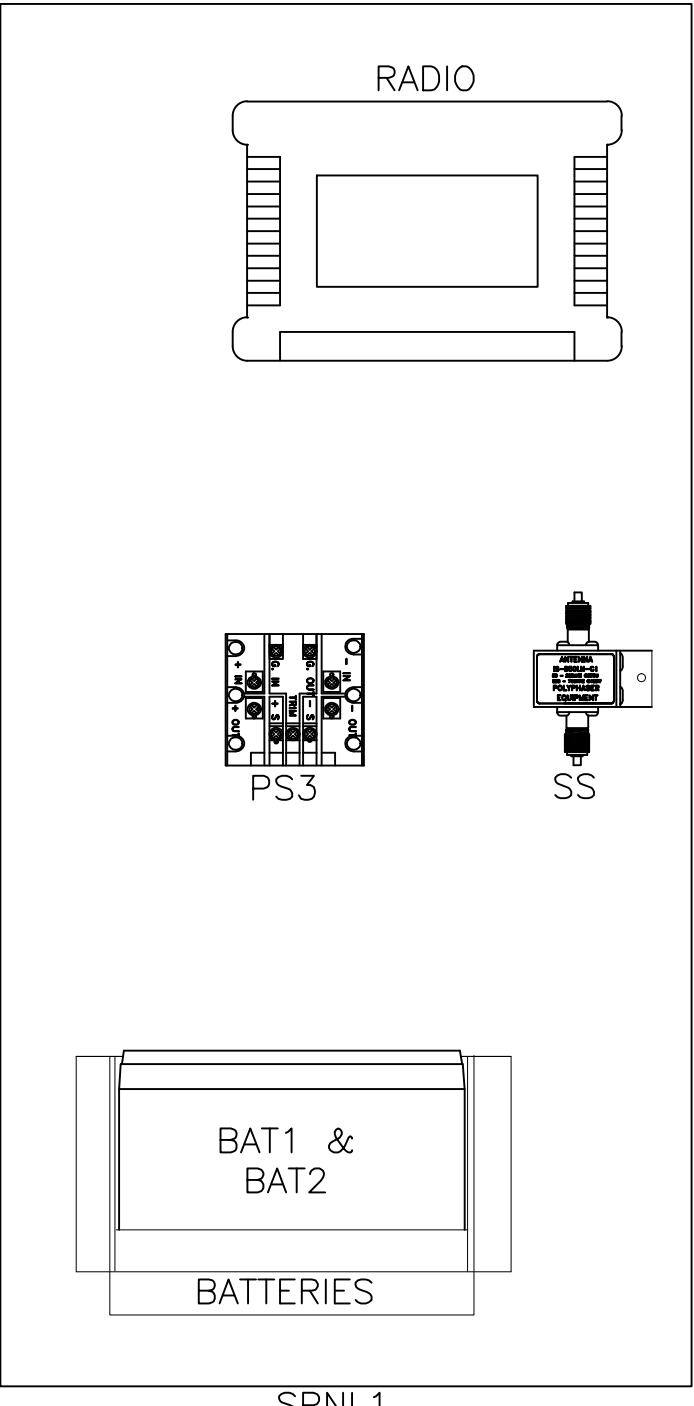

CONTROL ENCLOSURE  
RIGHT SIDEPANEL LAYOUT


| ALL WORK SHALL BE CONSTRUCTED IN ACCORDANCE WITH THE LATEST EDITION OF THE E.C.U.A. STANDARD SPECIFICATIONS |                        |                     |                                                                                  |                  |                       |     |      |                           |            |                                                                                       |                   |                       |     |
|-------------------------------------------------------------------------------------------------------------|------------------------|---------------------|----------------------------------------------------------------------------------|------------------|-----------------------|-----|------|---------------------------|------------|---------------------------------------------------------------------------------------|-------------------|-----------------------|-----|
| 480V RVSS Equipment List                                                                                    |                        |                     |                                                                                  |                  |                       |     |      |                           |            |                                                                                       |                   |                       |     |
| Item                                                                                                        | Tag                    | Panel               | Description                                                                      | Manufacturer     | Model                 | Qty | Item | Tag                       | Panel      | Description                                                                           | Manufacturer      | Model                 | Qty |
| 1                                                                                                           | ENC1                   | All                 | 60X24X18 NEMA 4X SS Enclosure                                                    | Hoffman          | A602418SSF5N4         | 4   | 75   | -                         | -          | Antenna Tower 5' Base Section, ROHN R-SB25G5 (Ship Loose)                             | Tessco            | 64559                 | 1   |
| 2                                                                                                           | BPNL1                  | All                 | 60x24 Painted Steel Backpanel                                                    | Hoffman          | A60P24F1              | 4   | 76   | -                         | -          | Antenna Tower 10' Mid Section, ROHN R-25G (Ship Loose)                                | Tessco            | 56866                 | 1   |
| 3                                                                                                           | SPNL1                  | Pump 1, 2 & Control | 28"H x 12"W Aluminum Sidepanel                                                   | EWS              | Custom                | 3   | 77   | -                         | -          | Antenna Tower 9' Top Section, ROHN R-25AG2 (Ship Loose)                               | Tessco            | 70080                 | 1   |
| 4                                                                                                           | DFNT                   | Power & Control     | 60x24 Aluminum Deadfront Panel                                                   | EWS              | Custom                | 2   | 78   | -                         | -          | 21' 1-1/4" S.S. Antenna Mast (Ship Loose)                                             | Bell Steel        | 23008                 | 1   |
| 5                                                                                                           | DSWK                   | Power & Control     | Door Swing Kit                                                                   | Hoffman          | ANADFK                | 2   | 79   | F18, F19                  | Control    | 1/4A Fuse                                                                             | Bussmann          | AGC-1/4               | 2   |
| 6                                                                                                           | FRM                    | All                 | Expanded Metal Stainless Steel Frame                                             | EWS              | SEE DRAWINGS          | 1   | 80   | F16, F17, F23, F24        | Control    | 2A Fuse                                                                               | Bussmann          | AGC-2                 | 4   |
| 7                                                                                                           | PDB                    | Power               | Incoming Power Distribution Block PDB                                            | Square D         | SEE HP TABLE SHEET 11 | 1   | 81   | SS1, SS2                  | Control    | 3 Position Selector Switch, 30MM                                                      | Square D          | 9001SKS43BH2          | 2   |
| 8                                                                                                           | PDB                    | Power               | Incoming Power Distribution Block PDB Cover                                      | Square D         | SEE HP TABLE SHEET 11 | 1   | 82   | R2-R13                    | Control    | 24VDC 3PDT General Purpose Relay w/ Indicator Lamp                                    | Potter Brumfield  | KRPA-14DN-24          | 12  |
| 9                                                                                                           | GND                    | Power               | Power Panel Ground Bar                                                           | Square D         | PK15GTA-L             | 1   | 83   | SF1, SF2                  | Control    | 120V Seal Failure Relay                                                               | ATC               | SPM-120-AAA-10K       | 2   |
| 10                                                                                                          | ENC3                   | Power               | 16"H x 16"W x 8"D Screw Cover Type 3R Enclosure                                  | Hoffman          | A16168GSC             | 1   | 84   | ISR1                      | Control    | Intrinsically Safe Barrier Relay, 24VDC                                               | Phoenix Contact   | 2685476               | 1   |
| 11                                                                                                          | CB1                    | Power               | 600V Main Circuit Breaker                                                        | Square D         | SEE HP TABLE SHEET 11 | 1   | 85   | TB2                       | Control    | Terminal Block, Blue TB2                                                              | Phoenix Contact   | 3044115               | 4   |
| 12                                                                                                          | CB2                    | Power               | 600V Emergency Circuit Breaker                                                   | Square D         | SEE HP TABLE SHEET 11 | 1   | 86   | TB2                       | Control    | Terminal Block, Blue End Barrier, TB2                                                 | Phoenix Contact   | 3047235               | 1   |
| 13                                                                                                          | CB1,CB2                | Power               | Mechanical Interlock for H/J Frame Circuit Breakers                              | Square D         | S29369                | 1   | 87   | TB2                       | Control    | Ground Terminal Blocks, TB2                                                           | Phoenix Contact   | 3044128               | 2   |
| 14                                                                                                          | CB1,CB2                | Power               | Door Mounted Rotary Handle for H/J Frame Circuit Breakers                        | Square D         | S29338                | 2   | 88   | PB1, PB2                  | Control    | Push Button, Black 1NO 1NC                                                            | Square D          | 9001SKR1BH13          | 2   |
| 15                                                                                                          | GEN REC                | Power               | NEMA 4X Generator Receptacle                                                     | Appleton         | AR20044RS             | 1   | 89   | SS3, SS4                  | Control    | 2 Position Selector Switch, 30MM                                                      | Square D          | 9001SKS11BH2          | 2   |
| 16                                                                                                          | PDB1                   | Power               | Main Power Distribution Block                                                    | Square D         | SEE HP TABLE SHEET 11 | 1   | 90   | TD1                       | Control    | 24VDC 0-180 Second Time Delay Relay                                                   | Square D          | RE48ATM12MW           | 1   |
| 17                                                                                                          | PDB1                   | Power               | Main Power Distribution Block Cover                                              | Square D         | SEE HP TABLE SHEET 11 | 1   | 91   | TD1                       | Control    | 8 Pin Relay Base                                                                      | ABB               | NDS-8                 | 1   |
| 18                                                                                                          | F1-F3, F38-F40         | Power               | 3 Pole Rejection type Fuse Block                                                 | Bussmann         | BC6033PQ              | 2   | 92   | F20, F27, F28             | Control    | 1/10A Fuse                                                                            | Bussmann          | AGC-1/10              | 3   |
| 19                                                                                                          | F1-F3, F38-F40         | Power               | 1A Rejection Type Fuse, Class CC                                                 | Bussmann         | KTK-R-1               | 6   | 93   | HMI                       | Control    | TD400C Text Display                                                                   | Siemens           | 6AV6 640-0AA00-0AX1   | 1   |
| 20                                                                                                          | F1-F3, F38-F40         | Power               | Fuse Cover                                                                       | Bussmann         | SAMI-7N               | 6   | 94   | F21, F22                  | Control    | 1A Fuse                                                                               | Bussmann          | AGC-1                 | 2   |
| 21                                                                                                          | PM                     | Power               | 480V Phase Monitor                                                               | Timemark         | A257B                 | 1   | 95   | PLC                       | Control    | S7-200 Dual Com Port Processor w/ 24 DI & 16 DO Points                                | Siemens           | 6ES7 216-2AD23-0XB0   | 1   |
| 22                                                                                                          | PM                     | Power               | 480V, 8-Pin Relay Base                                                           | ABB              | OT08PC                | 1   | 96   | AI                        | Control    | S7-200 4 Point AI Module                                                              | Siemens           | 6ES7 231-0HC22-0XA0   | 1   |
| 23                                                                                                          | CB3-CB6                | Power               | Breaker Stand                                                                    | EWS              | Custom                | 1   | 97   | AO                        | Control    | S7-200 2 Point AO Module                                                              | Siemens           | 6ES7 232-0HB22-0XA0   | 1   |
| 24                                                                                                          | CB3                    | Power               | 30A 480V 3 Pole Circuit Breaker, Main Surge Arrestor                             | Square D         | HDL36030              | 1   | 98   | PLC                       | Control    | S7-200 Communication cable PC/PP1 RS-232/485                                          | Siemens           | 6ES7 901-3CB30-0XA0   | 1   |
| 25                                                                                                          | SA                     | Power               | Main Surge Arrestor                                                              | SSI              | SDLA3N4               | 1   | 99   | SP1-SP3                   | Control    | Plug In DI Surge Suppression, PT 4x1...DC                                             | Phoenix Contact   | 2838322               | 3   |
| 26                                                                                                          | CB4, CB5               | Power               | 600V 3 Pole Circuit Breaker, Starter                                             | Square D         | SEE HP TABLE SHEET 11 | 2   | 100  | SP1-SP3                   | Control    | Terminal Block Base for Plugable Surge Supression, PT 4x1-BE                          | Phoenix Contact   | 2839363               | 3   |
| 27                                                                                                          | CB4,CB5                | Power               | H & J Frame Circuit Breaker Locking System                                       | Square D         | S29371                | 2   | 101  | LS1-LS4                   | Control    | Panel Intrusion Switches, N.C. Contacts                                               | NSI               | 76030PS               | 4   |
| 28                                                                                                          | PDB2A, PDB3A           | Pump 1 & 2          | Power Distribution Block                                                         | Square D         | SEE HP TABLE SHEET 11 | 2   | 102  | F25                       | Control    | 1-1/2A Fuse                                                                           | Bussmann          | AGC-1-1/2             | 1   |
| 29                                                                                                          | PDB2A, PDB3A           | Pump 1 & 2          | Power Distribution Block Cover                                                   | Square D         | SEE HP TABLE SHEET 11 | 2   | 103  | F26                       | Control    | 3/4A Fuse                                                                             | Bussmann          | AGC-3/4               | 1   |
| 30                                                                                                          | RVSS1, RVSS2           | Pump 1 & 2          | 480V Reduced Voltage Soft Starter                                                | Solcon           | SEE HP TABLE SHEET 11 | 2   | 104  | PT                        | Control    | Process Transmitter                                                                   | Endress & Hauser  | RMA42AAAH2            | 1   |
| 31                                                                                                          | RVSS1, RVSS2           | Control             | Remote keypad for Solcon RVS-DN SoftStarter                                      | Solcon           | DISP6640043           | 2   | 105  | PT                        | -          | Submersible Level Transducer, 33ft Range w/ 60ft Cable & Mounting Clamp (Ship Loose ) | Endress & Hauser  | FMX21-FE221HGE21APO   | 1   |
| 32                                                                                                          | IMM1, IMM2             | Pump 1 & 2          | FLKM-037 SUB/S Interface Cable Male                                              | Phoenix Contact  | 2281115               | 2   | 106  | F29-F31                   | Control    | 24VDC Fused Terminal Block With Indication                                            | Phoenix Contact   | 3046090               | 3   |
| 33                                                                                                          | IMF1, IMF2             | Control             | FLKM-037 SUB/B Interface Cable Female                                            | Phoenix Contact  | 2281212               | 2   | 107  | F29-F31                   | Control    | 1/4A Fuse, Analog Inputs                                                              | Bussmann          | GMA-250               | 3   |
| 34                                                                                                          | IMM1, IMM2, IMF1, IMF2 | Pump 1, 2 & Control | 37 Pin D-Sub Cable, DB-37 Male to DB-37 Female                                   | GC Electronics   | 45-463                | 2   | 108  | VR1, VR2                  | Control    | 6A Fuse, RVSS Control Power                                                           | Bussmann          | AGC-6                 | 2   |
| 35                                                                                                          | SPNL2                  | Control             | 10"H x 12"W Aluminum Sidepanel                                                   | EWS              | Custom                | 1   | 109  | TBPP,1,DC,P1, 1A, P2 & 2A | All        | Terminal Block, Gray 26-10 AWG Wire                                                   | Phoenix Contact   | 3044102               | 126 |
| 36                                                                                                          | GND                    | Pump 1 & 2          | Power Panel to Starter Panel Ground                                              | NSI              | 2-0T                  | 2   | 110  | TBPP,1,DC,P1, 1A, P2 & 2A | All        | Terminal Block End Barrier                                                            | Phoenix Contact   | 3047028               | 8   |
| 37                                                                                                          | PDB2, PDB3             | Pump 1 & 2          | Motor Power Distribution Block PDB2&3, (1)#14-2/0.....(1)#14-2/0                 | Square D         | 9080LBA362101         | 2   | 111  | TBPP,1,DC,P1, 1A, P2 & 2A | All        | Terminal Block End Anchor                                                             | Phoenix Contact   | 800886                | 17  |
| 38                                                                                                          | PDB2, PDB3             | Pump 1 & 2          | Motor Power Distribution Block PDB2&3 Cover                                      | Square D         | 9080LB23              | 2   | 112  | TBP1A, TBP2A              | Pump 1 & 2 | Terminal Block, Gray 26-8 AWG Wire, TBVFD1A & TBVFD2A                                 | Phoenix Contact   | 3044131               | 8   |
| 39                                                                                                          | F4, F5, F7, F8         | Pump 1 & 2          | 3-1/2A Rejection Type Fuse, RVSS CPT Primary                                     | Bussmann         | FNQ-R-3-1/2           | 4   | 113  | GND                       | Control    | Control Panel Ground Bar                                                              | Square D          | PK5GTA                | 3   |
| 40                                                                                                          | CPT1, CPT2             | Pump 1 & 2          | 480/120V 750VA Transformer                                                       | Square D         | 9070TF750D1           | 2   | 114  |                           | -          | Meter Socket (SHIP LOOSE)                                                             | Milbank           | SEE HP TABLE SHEET 11 | 1   |
| 41                                                                                                          | CPT1, CPT2             | Pump 1 & 2          | Transformer Finger Safe Cover, VFD CPT Primary                                   | Square D         | 9070FSC-2             | 2   | 115  | -                         | -          | Stainless Steel 60' Float (SHIP LOOSE)                                                | Anchor Scientific | P60NO-SST             | 2   |
| 42                                                                                                          | CPT1, CPT2             | Pump 1 & 2          | Fuse Puller, RVSS CPT                                                            | Square D         | 9070FP-1              | 2   | 116  | -                         | -          | Insulated Ground Neutral (SHIP LOOSE)                                                 | Square D          | SN400LA               | 1   |
| 43                                                                                                          | F6, F9                 | Pump 1 & 2          | 10A Fuse, RVSS CPT Secondary                                                     | Bussmann         | FNQ-10                | 2   | 117  | -                         | -          | Ground Bar Kit (SHIP LOOSE)                                                           | Square D          | PKDGTJ250             | 1   |
| 44                                                                                                          | CB6                    | Power               | 25A 480V 2 Pole Circuit Breaker, XF1 Transformer Primary                         | Square D         | HDL26025              | 1   | 118  | -                         | -          | NEMA 4A S.S. Disconnect (SHIP LOOSE)                                                  | Square D          | J250DS                | 1   |
| 45                                                                                                          | XF1                    | Power               | 5kVA 480V/240-120V Transformer, NEMA 3R Stainless Steel                          | Square D         | 5S1FSS                | 1   | 119  | -                         | -          | Antenna Mast Stabilization Plate (Ship Loose)                                         | EWS               | Custom                | 1   |
| 46                                                                                                          | CB7-CB13               | Power               | Hinged Aluminum Bracked for Mounting 240/120V Circuit Breakers through Deadfront | EWS              | Custom                | 1   | 120  | -                         | -          | Stainless Steel 'U' Bolt, 2" Pole, 5/16" Diameter Bolt w/ 2-1/2" Threads (SHIP LOOSE) |                   |                       | 1   |
| 47                                                                                                          | CB7                    | Power               | 30A 240/120V 2 Pole Circuit Breaker, XF1 Transformer Secondary                   | Square D         | QOU230                | 1   | 121  | -                         | -          | 5/16" Stainless Steel Flat Washer for 'U' Bolt (SHIP LOOSE)                           |                   |                       | 2   |
| 48                                                                                                          | PDB4                   | Power               | 240V/120V Power Distribution Block PDB4, (1) #14-2 ... (4) #18-10                | Square D         | 9080LBA361104         | 1   | 122  | -                         | -          | 5/16" Stainless Steel Lock Washer for 'U' Bolt (SHIP LOOSE)                           |                   |                       | 2   |
| 49                                                                                                          | CB8                    | Power               | 20A, 240V, 2 Pole Circuit Breaker                                                | Square D         | QOU220                | 1   | 123  | -                         | -          | 5/16" Stainless Steel Nut for 'U' Bolt (SHIP LOOSE)                                   |                   |                       | 2   |
| 50                                                                                                          | REC1                   | Power               | 20A, 250V, 6-20R Receptacle                                                      | P&S              | 5872I                 | 1   | 124  | -                         | -          | Stainless Steel 'U' Bolt, 1/4" Diameter (SHIP LOOSE)                                  |                   |                       | 2   |
| 51                                                                                                          | CB9, CB10              | Power               | 20A, 120V 1 Pole Circuit Breaker                                                 | Square D         | QOU120                | 2   | 125  | -                         | -          | 1/4" Stainless Steel 1/4" Nut for 'U' Bolt (SHIP LOOSE)                               |                   |                       | 4   |
| 52                                                                                                          | REC2                   | Power               | 120V 20A GFCI Duplex Receptacle NEMA5-20R                                        | P&S              | 2094-I                | 1   | 126  | -                         | -          | 1-1/4" Reduction Bushing for Antenna Tower, ROHN R-TB50 (SHIP LOOSE)                  | Tessco            | 36882                 | 1   |
| 53                                                                                                          | REC1, REC2             | Power               | Custom Receptacle Cover NEMA 4X S.S.                                             | HOFFMAN          | HIDRPSS-MOD           | 1   | 127  | PLC                       | Control    | S7-200 Memory Module                                                                  | Siemens           | 6ES7 2918GF230AX0     | 1   |
| 54                                                                                                          | REC1, REC2             | Power               | 3/4 1G AL FD BOX                                                                 | Appelton         | 4CS-1/2               | 2   | 128  | N                         | Power      | Generator Neutral Block, (1)#6-400kcmil ... (6)#14-2                                  | Square D          | 9080LBA163106         | 1   |
| 55                                                                                                          | CB11                   | Power               | 15A, 120V, 1 Pole Circuit Breaker                                                | Square D         | QOU115                | 1   | 129  | N                         | Power      | Generator Neutral Block Cover                                                         | Square D          | 9080LB31              | 1   |
| 56                                                                                                          | CB12                   | Power               | 10A, 120V, 1 Pole Circuit Breaker                                                | Square D         | QOU110                | 1   | 130  | SPNL3                     | Power      | 32"x12" Aluminum Sidepanel                                                            | EWS               | Custom                | 1   |
| 57                                                                                                          | R1                     | Power               | 120V 3PDT General Purpose Relay w/ Indicator Lamp                                | Potter Brumfield | KRPA-14AN-120         | 1   | 131  | FM                        | Control    | Flow Meter                                                                            | Endress & Hauser  | 50P Compact           | 1   |
| 58                                                                                                          | R1-R13, SF1, SF2       | All                 | 11 Pin Relay Base                                                                | ABB              | NDS-11                | 15  | 132  | PR                        | Control    | Pressure Transmitter (0 - 150 PSI Transmitter)                                        | Endress & Hauser  | PMP71-AAC1P61RAAMA    | 1   |
| 59                                                                                                          | F10, F11               | Power               | Fused Terminal Block w/ 120V Blown Fuse Indication                               | Allen Bradley    | 1492-H4               | 4   | 133  | PM2                       | Power      | Voltage Monitor, Sentron PAC3100                                                      | Siemens           | 7KM3133=0BA00-3AA0    | 1   |
| 60                                                                                                          | -                      | Power & Control     | 1492-H4 &H5 Fused Terminal Block End Cover                                       | Allen Bradley    | 1492-N37              | 2   | 134  | HTR                       | Pump 1 & 2 | Space Heater, 550W                                                                    | Stego             | 02700-9-00            | 2   |
| 61                                                                                                          | F10, F11               | Power               | 3A Fuse, Power Supply Primary                                                    | Bussmann         | AGC-3                 | 2   | 135  | TBCT                      | Power      | Terminal Block, DIN Rail, Test Disconnect                                             | Phoenix Contact   | 3047400               | 6   |
| 62                                                                                                          | PS1, PS2               | Power               | 10A 24VDC Power Supply                                                           | Phoenix Contact  | 2938604               | 2   | 136  | TBCT                      | Power      | Terminal Block, C-ME 6/2                                                              | Phoenix Contact   | 3034442               | 3   |
| 63                                                                                                          | D1, D2                 | Power               | 10A Diode, P1000A                                                                | Newark           | 51R7094               | 2   | 137  | TBCT                      | Power      | Switching Jumper, POS 2, Gray/Orange                                                  | Phoenix Contact   | 3034468               | 3   |
| 64                                                                                                          | -                      | Power               | Custom Stand/Lexan Hinged Cover w/ Alum Stand for TBPP & Power Supply Fuses      | EWS              | Custom                | 1   | 138  | TBCT                      | Power      | Cover, 2.2M                                                                           | Phoenix Contact   | 3047426               | 1   |
| 65                                                                                                          | F12-F28                | Control             | Fused Terminal Block w/ 24VDC Blown Fuse Indication                              | Allen Bradley    | 1492-H5               | 17  | 139  | CT1, CT2                  | Power      | Current Transformer, 200:5 Ratio                                                      | Square D          | SEE HP TABLE SHEET 11 |     |
| 66                                                                                                          | F12-F15                | Control             | 10A Fuse, Power Supply Secondary & Batteries                                     | Bussmann         | AGC-10                | 4   | 140  | GFM                       | Power      | Ground Fault Module                                                                   | Square D          | SEE HP TABLE SHEET 11 |     |
| 67                                                                                                          | BAT1, BAT2             | Control             | 12VDC Battery                                                                    | Power Sonic      | PS1290                | 2   | 141  | F41                       | Power      | 1 Pole Rejection Type Fuse Block                                                      | Bussmann          | BC6031PQ              | 1   |
| 68                                                                                                          | PS3                    | Control             | 24VDC-15VDC Converter, 2A                                                        | Vicor            | V1-J12-EY-B1          | 1   | 142  | F41                       | Power      | 0.6A Rejection Type Fuse, Class CC                                                    | Bussmann          | KTK-R-6/10            | 1   |
| 69                                                                                                          | RADIO                  | Control             | 400MHz Radio                                                                     | GE MDS           | SD04MD                | 1   | 143  | ENC4                      | Power      | 14 X 12 NEMA 4X SS Enclosure                                                          | Hoffman           | LC353020SS            | 1   |
| 70                                                                                                          | RADIO                  | Control             | DB9 Male/Male Gender Changer                                                     | Office Depot     | 946660                | 1   | 144  | ENC4                      | Power      | 2" Galv. Rigid Coupling                                                               | -                 | -                     | 1   |
| 71                                                                                                          | RADIO/SS               | Control             | 3 Foot LMR400UF Coaxial Jumper NMale to TNCMale                                  | Tessco           | 324503                | 1   | 145  | ENC4                      | Power      | 2" x 1-1/2" Reducing Bushing                                                          | Crousehinds       | -                     | 1   |
| 72                                                                                                          | SS                     | Control             | Coaxial Surge Suppressor, 100-512MHz                                             | Polyphaser       | VHF50HN               | 1   | 146  | ENC4                      | Power      | 2" Ring Seal Rubber Gasket                                                            | T&B               | 5267                  | 1   |
| 73                                                                                                          | -                      | -                   | 50FT Coaxial Cable, NMale-Nmale, Wireless Solutions 400-07-07-P50 (Ship Loose )  | Tessco           | 370875                | 1   | 147  | ENC4                      | Power      | Cord Grip, 1.28 - 1.53                                                                | Appleton          | CG-128150             | 1   |
| 74                                                                                                          | -                      | -                   | 400MHz Yagi Antenna w/ N Female Connector, MAXRAD MYA4506N (Ship Loose )         | Tessci           | 37634                 | 1   | 148  | ENC4                      | Power      | 1-1/2" Alum. Hub                                                                      | Crousehinds       | STA-S                 | 1   |

| REVISIONS | BY |
|-----------|----|
|           |    |
|           |    |
|           |    |
|           |    |

IMPROVEMENTS TO WASTEWATER COLLECTION SYSTEM

LIFT STATION CONSTRUCTION DETAILS

ELECTRICAL STANDARDS

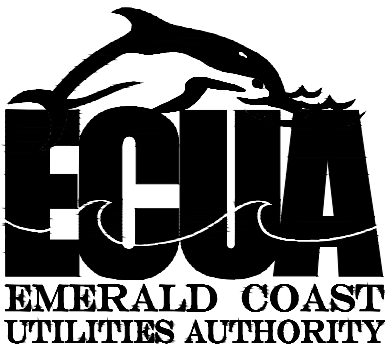

APPROVED BY:

|                  |
|------------------|
| Drawn:           |
| Designed:        |
| Checked:         |
| Date: 12/18/2014 |
| Scale:           |
| Project No:      |
| Sheet No. 10     |
| Of 18 Sheets     |

ALL WORK SHALL BE CONSTRUCTED IN ACCORDANCE WITH THE LATEST EDITION OF THE E.C.U.A. STANDARD SPECIFICATIONS

| Horsepower Related Component's Equipment List |              |                                 |                                 |                                 |                                 |                                 |
|-----------------------------------------------|--------------|---------------------------------|---------------------------------|---------------------------------|---------------------------------|---------------------------------|
| Item                                          | Tag          | Horsepower                      |                                 |                                 |                                 |                                 |
|                                               |              | 20                              | 30                              | 40                              | 50                              | 60                              |
| Incoming Power Distribution Block             | PDB          | 9080LBA362101                   | 9080LBA363101                   | 9080LBA363101                   | 9080LBA363101                   | 9080LBA363101                   |
| Incoming Power Distribution Block Cover       | PDB          | 9080LB23                        | 9080LB33                        | 9080LB33                        | 9080LB33                        | 9080LB33                        |
| Main Circuit Breaker                          | CB1          | HDL36110                        | HDL36150                        | JDL36175                        | JDL36200                        | JDL36225                        |
| Emergency Circuit Breaker                     | CB2          | HDL36110                        | HDL36150                        | JDL36175                        | JDL36200                        | JDL36200                        |
| Main Power Distribution Block                 | PDB1         | 9080LBA363206                   | 9080LBA365208                   | 9080LBA365208                   | 9080LBA365208                   | 9080LBA365208                   |
| Main Power Distribution Block Cover           | PDB1         | 9080LB33                        | 9080LB53                        | 9080LB53                        | 9080LB53                        | 9080LB53                        |
| Starter Circuit Breaker                       | CB4, CB5     | HDL36060SA                      | HDL36080SA                      | HDL36090SA                      | HDL36100SA                      | HDL36110SA                      |
| Motor Power Distribution Block                | PDB2A, PDB3A | 9080LBA362104                   | 9080LBA362104                   | 9080LBA363104                   | 9080LBA363104                   | 9080LBA363104                   |
| Motor Power Distribution Block Cover          | PDB2A, PDB3A | 9080LB23                        | 9080LB23                        | 9080LB33                        | 9080LB33                        | 9080LB33                        |
| 480V RVSS                                     | RVSS1, RVSS2 | RVS-DN-44-480-115-3+M+8+9+D+U-S | RVS-DN-44-480-115-3+M+8+9+D+U-S | RVS-DN-58-480-115-3+M+8+9+D+U-S | RVS-DN-72-480-115-3+M+8+9+D+U-S | RVS-DN-85-480-115-3+M+8+9+D+U-S |
| Meter Socket                                  | -            | UAP9701-RRL                     | UAP9701-RRL                     | UAP9701-RRL                     | UAP3566-X-HSP                   | UAP3566-X-HSP                   |
| Current Transformer                           | CT1-CT3      | 2NR-201                         | 2NR-202                         | 2NR-203                         | 2NR-204                         | 2NR-251                         |
| Ground Fault Module                           | GFM          | Check with "Square D"           | Check with "Square D"           | Check with "Square D"           | Check with "Square D"           | Check with "Square D"           |


| Horsepower Related Power Conductors, CGB's and Hubs |                    |                  |                  |                    |                    |                    |
|-----------------------------------------------------|--------------------|------------------|------------------|--------------------|--------------------|--------------------|
| Conductor Tag                                       |                    | Horsepower       |                  |                    |                    |                    |
|                                                     |                    | 20               | 30               | 40                 | 50                 | 60                 |
| P-01, P-03 & P-04                                   | Description        | (3)#2            | (3)#1            | (3)#2/0            | (3)#3/0            | (3)#4/0            |
|                                                     | Manufacturer       | N/A              | N/A              | N/A                | N/A                | N/A                |
|                                                     | Catalog #          | N/A              | N/A              | N/A                | N/A                | N/A                |
|                                                     | Length (Max Ft)    | N/A              | N/A              | N/A                | N/A                | N/A                |
|                                                     | Cable Dia (in)     | 0.384"           | 0.446"           | 0.532"             | 0.584"             | 0.642"             |
|                                                     | Appleton Connector | (3) -CG-3150     | (3) -CG-3775     | (3) -CG-5075       | (3) -CG-5075       | (3) -CG-6275       |
|                                                     | Connector Range    | 0.312"-0.437"    | 0.375"-0.500"    | 0.500"-0.625"      | 0.500"-0.625"      | 0.625"-0.750"      |
|                                                     | Meyers Hub         | (3) 1/2" - STA-1 | (3) 3/4" - STA-2 | (3) 3/4" - STA-2   | (3) 3/4" - STA-2   | (3) 3/4" - STA-2   |
| P-02A                                               | Description        | (1)#6            | (1)#6            | (1)#6              | (1)#6              | (1)#4              |
|                                                     | Manufacturer       | N/A              | N/A              | N/A                | N/A                | N/A                |
|                                                     | Catalog #          | N/A              | N/A              | N/A                | N/A                | N/A                |
|                                                     | Length (Max Ft)    | N/A              | N/A              | N/A                | N/A                | N/A                |
|                                                     | Cable Dia (in)     | 0.254"           | 0.254"           | 0.254"             | 0.254"             | 0.324"             |
|                                                     | Appleton Connector | (1)-GC-1850      | (1)-GC-1850      | (1)-GC-1850        | (1)-GC-1850        | (1)-GC-3150        |
|                                                     | Connector Range    | 0.187"-0.312"    | 0.187"-0.312"    | 0.187"-0.312"      | 0.187"-0.312"      | 0.312"-0.437"      |
|                                                     | Hub                | (1) 1/2" - STA-1 | (1) 1/2" - STA-1 | (1) 1/2" - STA-1   | (1) 1/2" - STA-1   | (1) 1/2" - STA-1   |
| P-02B                                               | Description        | (1)#6            | (1)#6            | (1)#6              | (1)#6              | (1)#4              |
|                                                     | Manufacturer       | Southwire        | Southwire        | Southwire          | Southwire          | Southwire          |
| P-05 & P-06                                         | Description        | (3)#2            | (3)#1            | (3)#2/0            | (3)#3/0            | (3)#3/0            |
|                                                     | Manufacturer       | N/A              | N/A              | N/A                | N/A                | N/A                |
|                                                     | Catalog #          | N/A              | N/A              | N/A                | N/A                | N/A                |
|                                                     | Length (Max Ft)    | N/A              | N/A              | N/A                | N/A                | N/A                |
|                                                     | Cable Dia (in)     | 0.384"           | 0.446"           | 0.532"             | 0.584"             | 0.584"             |
|                                                     | Appleton Connector | (3) -CG-3150     | (3) -CG-3775     | (3) -CG-5075       | (3) -CG-5075       | (3) -CG-5075       |
|                                                     | Connector Range    | 0.312"-0.437"    | 0.375"-0.500"    | 0.500"-0.625"      | 0.500"-0.625"      | 0.500"-0.625"      |
|                                                     | Hub                | (3) 1/2" - STA-1 | (3) 3/4" - STA-2 | (3) 3/4" - STA-2   | (3) 3/4" - STA-2   | (3) 3/4" - STA-2   |
| P-07 & P-09                                         | Description        | (3)#8 W/G, TC    | (3)#6 W/G, TC    | (3)#2 W/G, TC      | (3)#2 W/G, TC      | (3)#2 W/G, TC      |
|                                                     | Manufacturer       | Houston Wire     | Houston Wire     | Houston Wire       | Houston Wire       | Houston Wire       |
|                                                     | Catalog #          | HW 154 00803     | HW 154 00603     | HW 154 00203       | HW 154 00203       | HW 154 00203       |
|                                                     | Length (Max Ft)    | 19 FT            | 19 FT            | 19 FT              | 19 FT              | 19 FT              |
|                                                     | Cable Dia (in)     | 0.58"            | 0.69"            | 1.03"              | 1.03"              | 1.03"              |
|                                                     | Appleton Connector | (2) - CG-5075    | (2) - CG-6275    | (2) - CG-100125    | (2) - CG-100125    | (2) - CG-100125    |
|                                                     | Connector Range    | 0.500"-0.625"    | 0.625"-0.750"    | 1.000"-1.125"      | 1.000"-1.125"      | 1.000"-1.125"      |
|                                                     | Hub                | (2) 3/4" - STA-2 | (2) 3/4" - STA-2 | (2) 1-1/4" - STA-4 | (2) 1-1/4" - STA-4 | (2) 1-1/4" - STA-4 |
| P-08 & P-10                                         | Description        | (3)#8            | (3)#6            | (3)#2              | (3)#2              | (3)#2              |
|                                                     | Manufacturer       | Southwire        | Southwire        | Southwire          | Southwire          | Southwire          |

| REVISIONS | BY |
|-----------|----|
|           |    |
|           |    |
|           |    |
|           |    |
|           |    |

IMPROVEMENTS TO WASTEWATER COLLECTION SYSTEM

LIFT STATION CONSTRUCTION DETAILS

ELECTRICAL STANDARDS

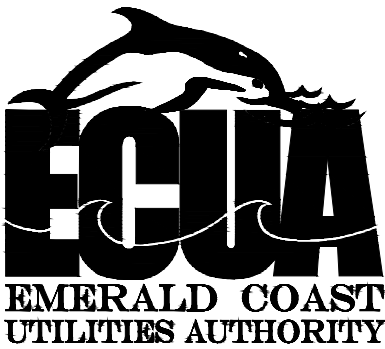

APPROVED BY:

|                  |
|------------------|
| Drawn:           |
| Designed:        |
| Checked:         |
| Date: 12/18/2014 |
| Scale:           |
| Project No:      |
| Sheet No. 11     |
| Of 18 Sheets     |

| Power & Control Conductors, CGB's and Hubs |                             |                      |               |                 |                |                                      |                       |                               |                          |                          |
|--------------------------------------------|-----------------------------|----------------------|---------------|-----------------|----------------|--------------------------------------|-----------------------|-------------------------------|--------------------------|--------------------------|
| Cable Number                               | Description                 | Manufacturer         | Catalog Numer | Length (Max Ft) | Cable Diameter | Appleton Liquidtight Cable Connector | Connector Cable Range | Crouse-Hinds Myers Hub        | From Panel/Enclosure     | To Panel/Enclosure       |
| P-13                                       | (3)#8 AWG W/GND, Tray Cable | Houston Wire & Cable | HW 154 00803  | 6 FT            | 0.58"          | (1) - CG-5075                        | 0.500"-0.625"         | (1) 3/4" - STA-2              | Power Panel              | 480/240-120V Transformer |
| P-14                                       | (3)#6 AWG W/GND, Tray Cable | Houston Wire & Cable | HW 154 00603  | 6 FT            | 0.69"          | (1) - CG-6275                        | 0.625"-0.750"         | (1) 3/4" - STA-2              | 480/240-120V Transformer | Power Panel              |
| P-15                                       | 3-1/C #12 AWG               | N/A                  | N/A           | AS REQ'D        | N/A            | N/A                                  | N/A                   | N/A                           | Power Panel              | Power Panel              |
| P-16                                       | 3-1/C #12 AWG               | N/A                  | N/A           | AS REQ'D        | N/A            | N/A                                  | N/A                   | N/A                           | Power Panel              | Power Panel              |
| C-01                                       | (16) #14 AWG, Tray Cable    | Houston Wire & Cable | HW 151 01416  | 24 FT           | 0.68"          | (2) - CG-6275                        | 0.625"-0.750"         | (2) 3/4" - STA-2              | Power Panel              | Control Panel            |
| C-02                                       | (16) #14 AWG, Tray Cable    | Houston Wire & Cable | HW 151 01416  | 22 FT           | 0.68"          | (2) - CG-6275                        | 0.625"-0.750"         | (2) 3/4" - STA-2              | Pump 1 Panel             | Control Panel            |
| C-03                                       | (16) #14 AWG, Tray Cable    | Houston Wire & Cable | HW 151 01416  | 19 FT           | 0.68"          | (2) - CG-6275                        | 0.625"-0.750"         | (2) 3/4" - STA-2              | Pump 2 Panel             | Control Panel            |
| C-04                                       | 1 Pair #16 SH, Tray Cable   | Houston Wire & Cable | HW 120 01601  | 22 FT           | 0.33"          | (2) - CG-2575                        | 0.250"-0.375"         | (2) 3/4" - STA-2              | Pump 1 Panel             | Control Panel            |
| C-05                                       | 1 Pair #16 SH, Tray Cable   | Houston Wire & Cable | HW 120 01601  | 19 FT           | 0.33"          | (2) - CG-2575                        | 0.250"-0.375"         | (2) 3/4" - STA-2              | Pump 2 Panel             | Control Panel            |
| PUMP 1-PWR                                 | Per Mfg Specs               | N/A                  | N/A           | N/A             | N/A            | CG Series based on Mfg Specs         | N/A                   | STA Series based on Mfg Specs | Field (Pump 1)           | Pump 1 Panel             |
| PUMP 1-MTP                                 | Per Mfg Specs               | N/A                  | N/A           | N/A             | N/A            | CG Series based on Mfg Specs         | N/A                   | STA Series based on Mfg Specs | Field (Pump 1)           | Pump 1 Panel             |
| PUMP 1-SF                                  | Per Mfg Specs               | N/A                  | N/A           | N/A             | N/A            | CG Series based on Mfg Specs         | N/A                   | STA Series based on Mfg Specs | Field (Pump 1)           | Pump 1 Panel             |
| PUMP 2-PWR                                 | Per Mfg Specs               | N/A                  | N/A           | N/A             | N/A            | CG Series based on Mfg Specs         | N/A                   | STA Series based on Mfg Specs | Field (Pump 2)           | Pump 2 Panel             |
| PUMP 2-MTP                                 | Per Mfg Specs               | N/A                  | N/A           | N/A             | N/A            | CG Series based on Mfg Specs         | N/A                   | STA Series based on Mfg Specs | Field (Pump 2)           | Pump 2 Panel             |
| PUMP 2-SF                                  | Per Mfg Specs               | N/A                  | N/A           | N/A             | N/A            | CG Series based on Mfg Specs         | N/A                   | STA Series based on Mfg Specs | Field (Pump 2)           | Pump 2 Panel             |
| Float Switch 1                             | Float Switch Cable          | BY OTHERS            | N/A           | N/A             | 0.56"          | (1) - CG-5050                        | 0.500"-0.625"         | (1) 1/2" - STA-1              | Field (Float Switch)     | Control Panel            |
| Float Switch 2                             | Float Switch Cable          | BY OTHERS            | N/A           | N/A             | 0.56"          | (1) - CG-5050                        | 0.500"-0.625"         | (1) 1/2" - STA-1              | Field (Float Switch)     | Control Panel            |
| Pressure Xducer                            | Pressure Transducer Cable   | BY OTHERS            | N/A           | N/A             | 0.35"          | (1) - G-3150                         | 0.312"-0.437"         | (1) 1/2" - STA-1              | Field (Float Switch)     | Control Panel            |
| Antenna COAX                               | Coaxial Cable               | BY OTHERS            | N/A           | N/A             | 0.408"         | (1) - CG-3750                        | 0.375"-0.500"         | (1) 1/2" - STA-1              | Field (Antenna)          | Control Panel            |
| Comm-1                                     | (37) #18 AWG, Tray Cable    | Houston Wire & Cable | HW15001837    | 20 FT           | 0.74"          | (1) - CG-6275                        | 0.625"-0.750"         | (1) 3/4" - STA-2              | Control Panel            | Pump 1 Panel             |
| Comm-2                                     | (37) #18 AWG, Tray Cable    | Houston Wire & Cable | HW15001837    | 20 FT           | 0.74"          | (1) - CG-6275                        | 0.625"-0.750"         | (1) 3/4" - STA-2              | Control Panel            | Pump 2 Panel             |

SERVICING CT & TESTING AMMETERS INSTRUCTIONS

WARNING

NEVER LEAVE THE CT CIRCUIT OPEN ALWAYS SHORT THE CIRCUIT. WHEN MAINTENANCE IS REQUIRED ENSURE TO FOLLOW THE INSTRUCTIONS BELOW. FAILURE TO DO SO MAY RESULT IN HIGH VOLTAGE SURGE THAT COULD INJURE PERSONAL AND DAMAGE EQUIPMENT.

THE CALIBRATION & DISCONNECT PROCESS

- Loosen the screws on the SB-ME 2-8 and move the shorting bar from position A to B to short the outputs of the CT.
- Secure the shorting bar by tightening the screws. The CT is now neutralized and the circuit is "safe" to open.
  - For circuits that include an ME knife-disconnect terminal block, the knife disconnects can now be safely opened.
- The test signal can now be injected into the transducer/meter side of the circuit by inserting the signal probes into the test adapters or connecting the signal to the disconnected wiring of the measurement circuit.

To return the unit to normal operation, perform the above steps in reverse order:

- Disconnect the test signal/probes from the transducer wires or remove probes from the test plugs.
  - For circuits that include the ME, the knife disconnect must now be CLOSED.
- Open the switching bridge and return to normal operation.
- Loosen the screws and move the shorting bar from position B to A and snap into place.
- Tighten the screws to prevent movement and inadvertent shorting of the CT.

The CT measurement circuit is now functional

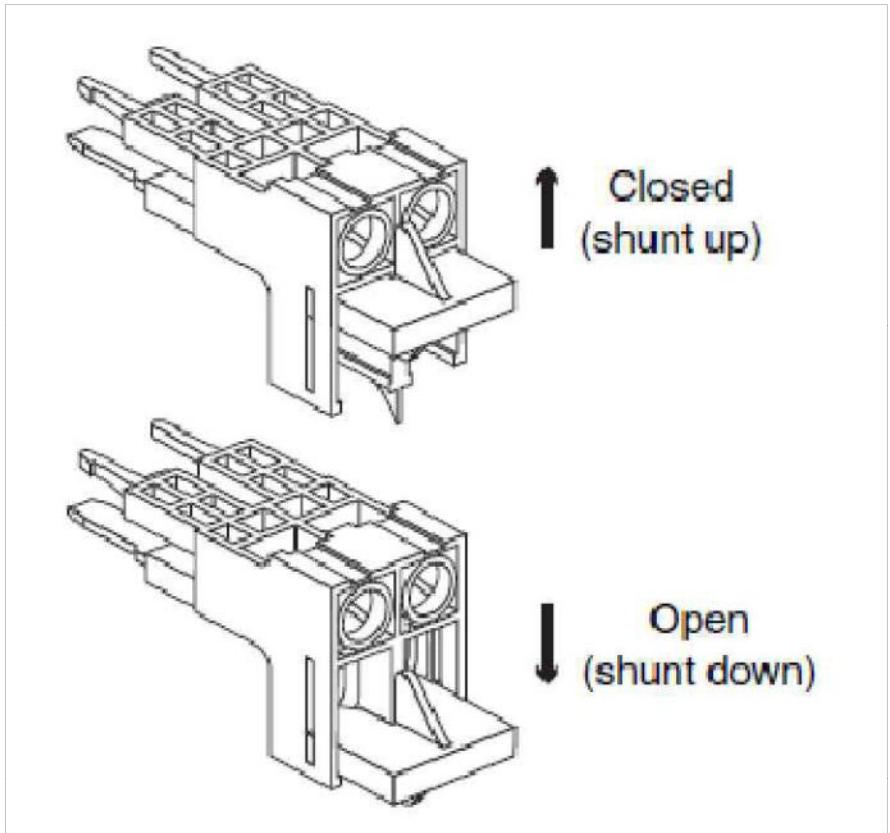


FIGURE 1: SB-ME 2-8 switching bridge


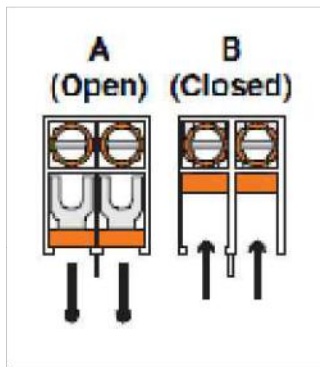


FIGURE 2: SB-ME 2-8 switching bridge

| REVISIONS | BY |
|-----------|----|
|           |    |
|           |    |
|           |    |
|           |    |

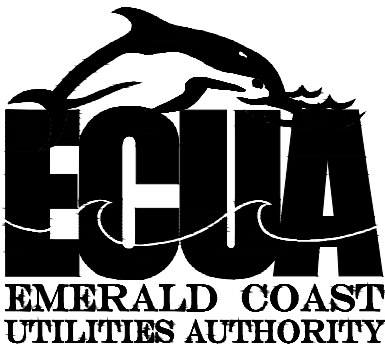

APPROVED BY:

|                  |
|------------------|
| Drawn:           |
| Designed:        |
| Checked:         |
| Date: 12/18/2014 |
| Scale:           |
| Project No:      |
| Sheet No. 12     |
| Of 18 Sheets     |

|                  |
|------------------|
| Drawn:           |
| Designed:        |
| Checked:         |
| Date: 12/18/2014 |
| Scale:           |
| Project No:      |
| Sheet No. 13     |
| Of 18 Sheets     |

ALL WORK SHALL BE CONSTRUCTED IN ACCORDANCE WITH THE LATEST EDITION OF THE E.C.U.A. STANDARD SPECIFICATIONS


| REVISIONS | BY |
|-----------|----|
|           |    |
|           |    |
|           |    |
|           |    |

- NOTES:
- 1.TOP AND BOTTOM OF BASE TO BE LEFT OPEN.
  - 2.DRILL TOP OF BASE TO ATTACH ENCLOSURES AS REQUIRED.
  - 3.DRILL BOTTOM OF BASE TO ATTACH TO SLAB AS REQUIRED.

ATTENTION


THIS LAYOUT IS ONE OF TWO (2) POSSIBLE CHOICES – SEE SHEET 14 FOR THE OTHER OPTION. IF THIS LAYOUT OPTION IS SELECTED, SEE SHEET 7A FOR ASSOCIATED PANEL LAYOUT DETAILS.

IMPROVEMENTS TO WASTEWATER COLLECTION SYSTEM  
LIFT STATION CONSTRUCTION DETAILS  
ELECTRICAL STANDARDS

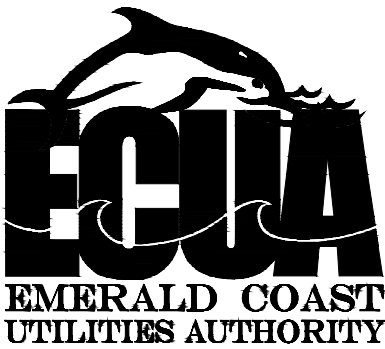


APPROVED BY:

|                  |
|------------------|
| Drawn:           |
| Designed:        |
| Checked:         |
| Date: 12/18/2014 |
| Scale:           |
| Project No:      |
| Sheet No. 14A    |
| Of 18 Sheets     |

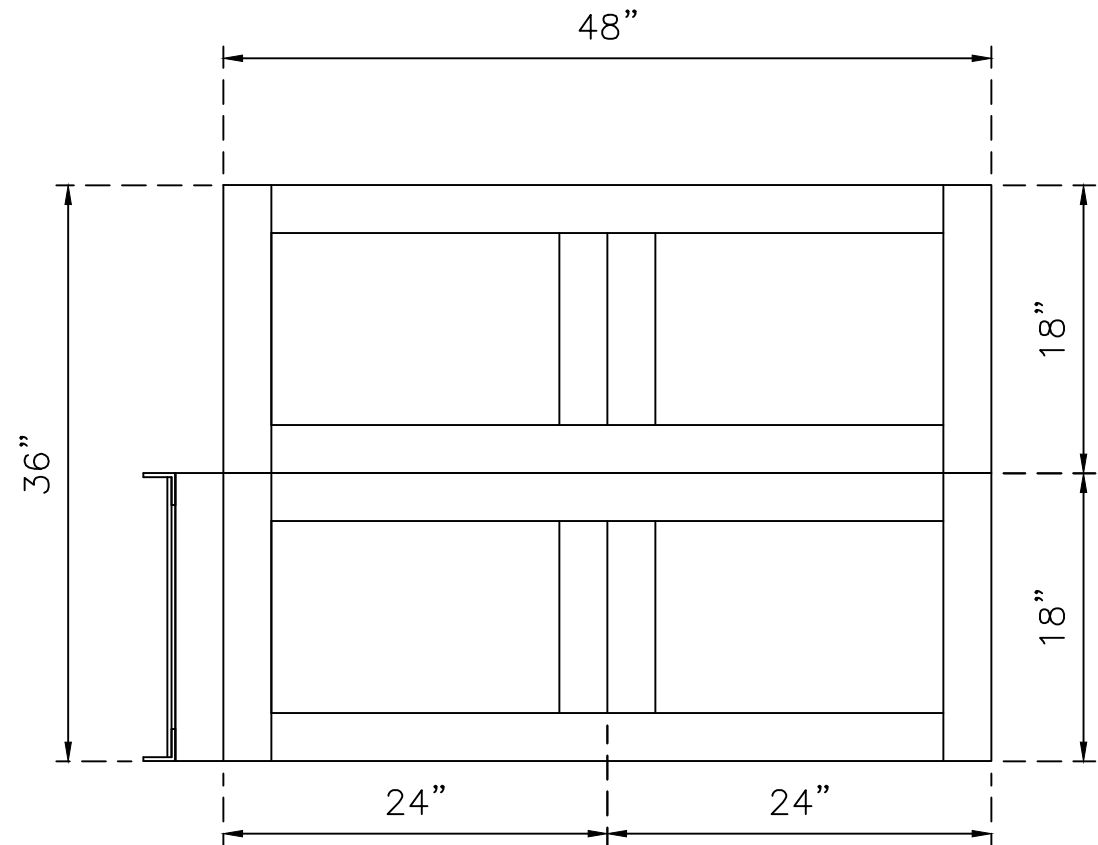


TOP VIEW

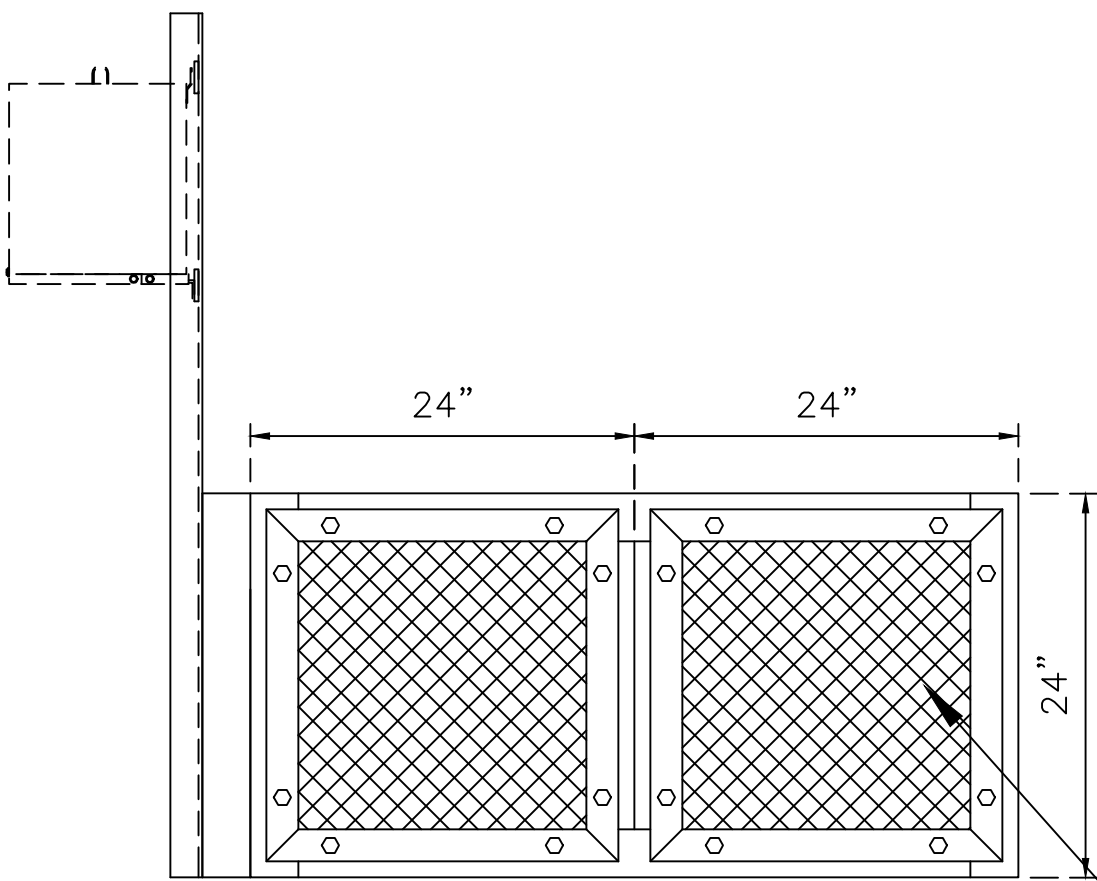


FRONT VIEW

FRONT OF BASE WILL HAVE REMOVABLE PANELS AT EACH OPENING AS SHOWN. ATTACH SCREENS TO BACK SIDE OF REMOVABLE PANELS

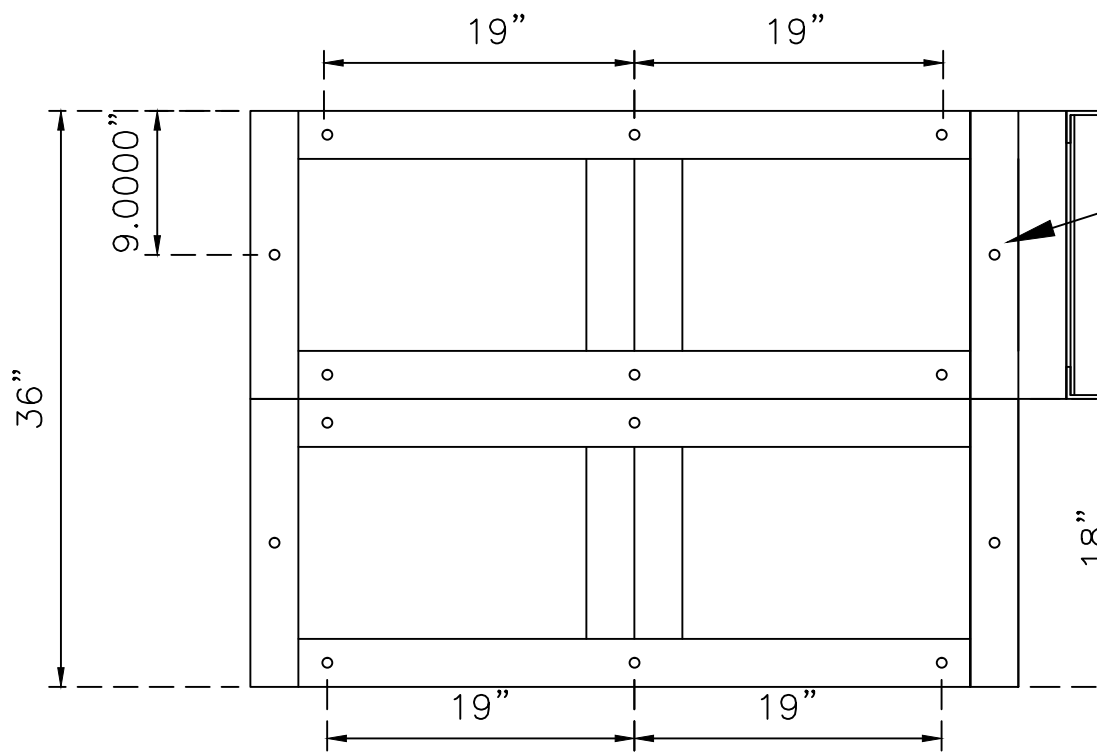


BOTTOM VIEW

DRILL (12) 5/8"Ø HOLES AS SHOWN, CENTERED ON ANGLE

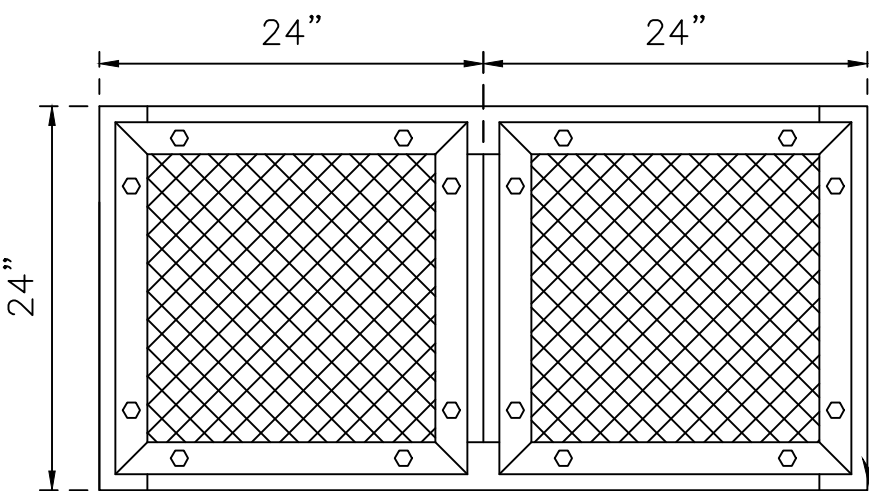

BACK VIEW

ENTIRE BASE MADE FROM 3" STAINLESS STEEL ANGLE, WELDED

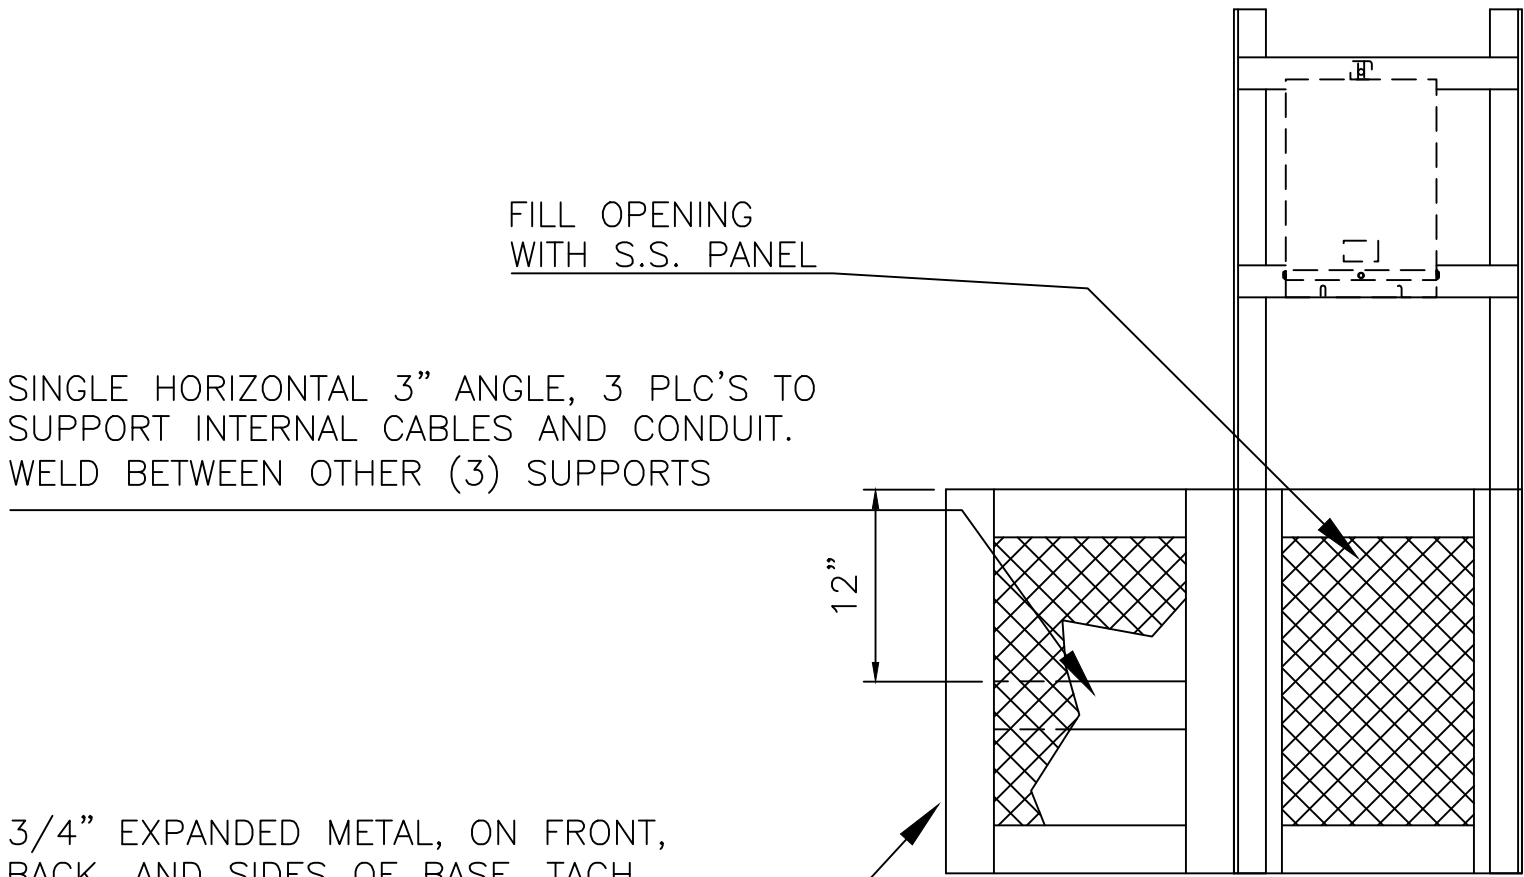


END VIEW

SINGLE HORIZONTAL 3" ANGLE, 3 PLC'S TO SUPPORT INTERNAL CABLES AND CONDUIT. WELD BETWEEN OTHER (3) SUPPORTS

FILL OPENING WITH S.S. PANEL

3/4" EXPANDED METAL, ON FRONT, BACK, AND SIDES OF BASE. TACH WELDED TO THE INSIDE OF BASE

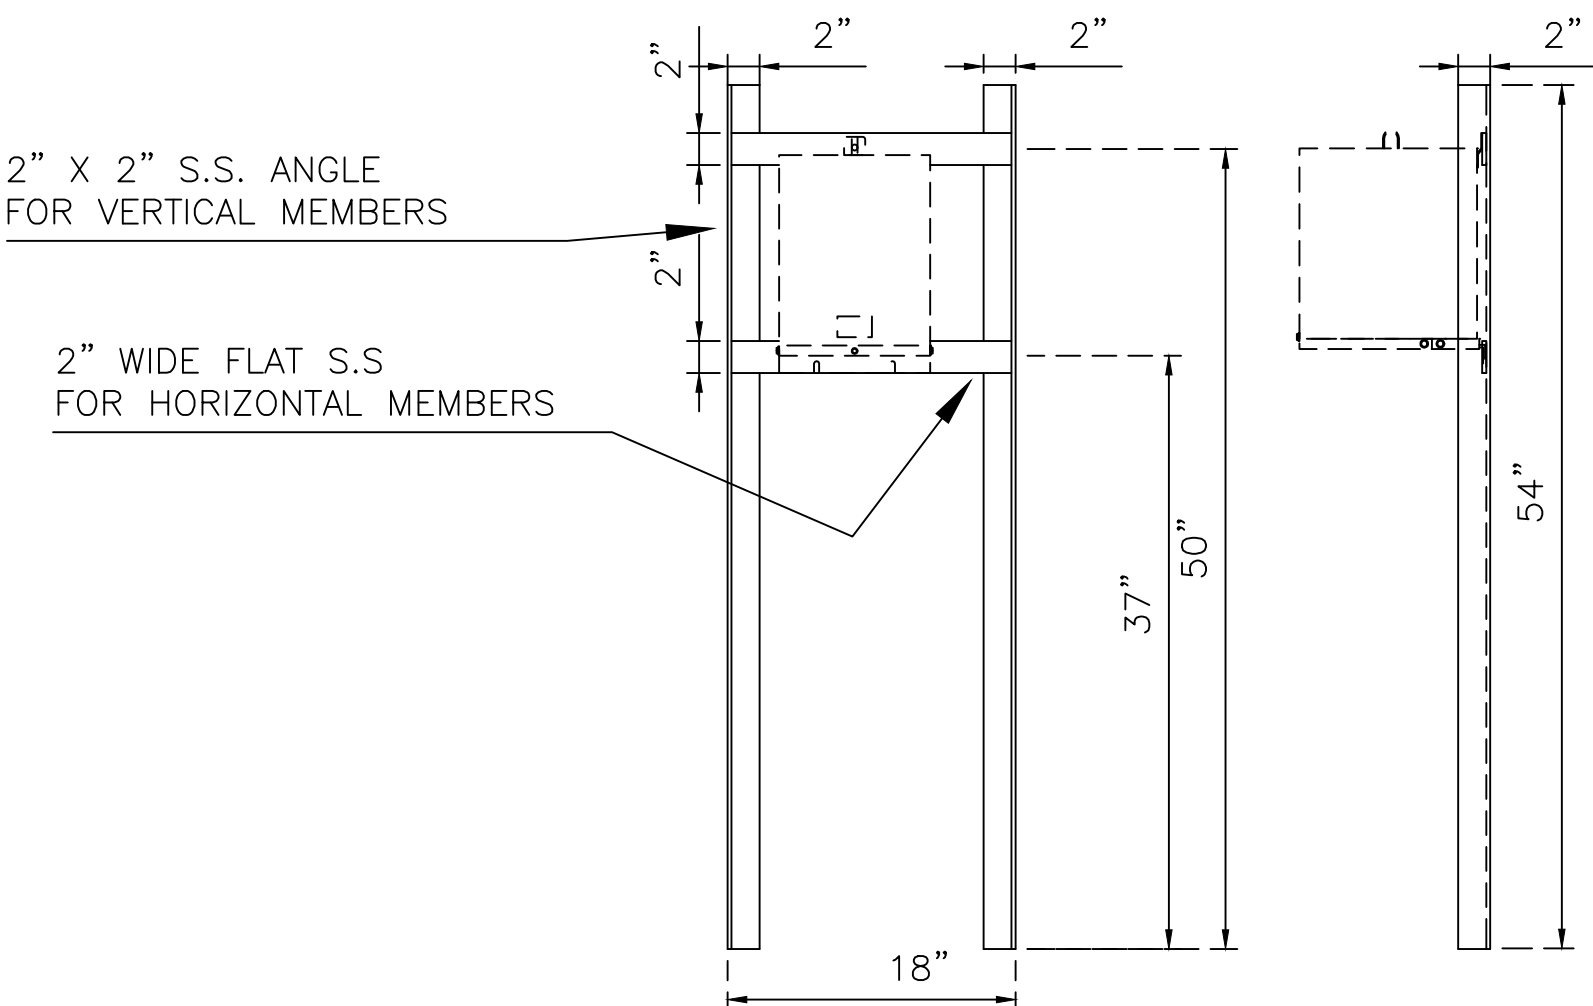


RACK DETAILS

2" X 2" S.S. ANGLE FOR VERTICAL MEMBERS

2" WIDE FLAT S.S. FOR HORIZONTAL MEMBERS

| REVISIONS | BY |
|-----------|----|
|           |    |
|           |    |
|           |    |
|           |    |

IMPROVEMENTS TO WASTEWATER COLLECTION SYSTEM  
LIFT STATION CONSTRUCTION DETAILS  
ELECTRICAL STANDARDS

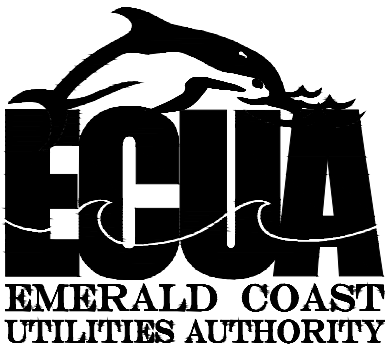

APPROVED BY:

| Power Panel Fuse Schedule |            |         |      |                           |
|---------------------------|------------|---------|------|---------------------------|
| Fuse                      | Type       | Voltage | Amps | Description               |
| F1                        | KTK-R-1    | 600     | 1A   | PM1 Phase Monitor A Phase |
| F2                        | KTK-R-1    | 600     | 1A   | PM1 Phase Monitor B Phase |
| F3                        | KTK-R-1    | 600     | 1A   | PM1 Phase Monitor C Phase |
| F10                       | AGC-3      | 250     | 3A   | Power Supply 1 Primary    |
| F11                       | AGC-3      | 250     | 3A   | Power Supply 2 Primary    |
| F38                       | KTK-R-1    | 600     | 1A   | PM2 Power Monitor A Phase |
| F39                       | KTK-R-1    | 600     | 1A   | PM2 Power Monitor B Phase |
| F40                       | KTK-R-1    | 600     | 1A   | PM2 Power Monitor C Phase |
| F41                       | KTK-R-6/10 | 600     | .6A  | Power Monitor             |

| Pump 1 Panel Fuse Schedule |             |         |        |                      |
|----------------------------|-------------|---------|--------|----------------------|
| Fuse                       | Type        | Voltage | Amps   | Description          |
| F4                         | FNQ-R-3-1/2 | 600     | 3-1/2A | Pump 1 CPT Phase A   |
| F5                         | FNQ-R-3-1/2 | 600     | 3-1/2A | Pump 1 CPT Phase C   |
| F6                         | FNQ-10      | 500     | 10A    | Pump 1 CPT Secondary |
| F32                        | AGC-6       | 250     | 6A     | RVSS Control Power   |

| Pump 2 Panel Fuse Schedule |             |         |        |                      |
|----------------------------|-------------|---------|--------|----------------------|
| Fuse                       | Type        | Voltage | Amps   | Description          |
| F7                         | FNQ-R-3-1/2 | 600     | 3-1/2A | Pump 2 CPT Phase A   |
| F8                         | FNQ-R-3-1/2 | 600     | 3-1/2A | Pump 2 CPT Phase C   |
| F9                         | FNQ-10      | 500     | 10A    | Pump 2 CPT Secondary |
| F33                        | AGC-6       | 250     | 6A     | RVSS Control Power   |

| Nameplate Data   |    |    |     |     |     |
|------------------|----|----|-----|-----|-----|
| Total Load (FLA) | 73 | 99 | 127 | 155 | 181 |
| Motor Hp         | 20 | 30 | 40  | 50  | 60  |
| Motor FLA        | 27 | 40 | 52  | 65  | 77  |

| Torque Rating Table                 |                  |                  |                  |                  |                  |
|-------------------------------------|------------------|------------------|------------------|------------------|------------------|
| Component                           | Horsepower       |                  |                  |                  |                  |
|                                     | 20               | 30               | 40               | 50               | 60               |
| Incoming Distribution Block (PDB1)  | 120lb-in/13.5N-m | 275lb-in/31.0N-m | 275lb-in/31.0N-m | 275lb-in/31.0N-m | 275lb-in/31.0N-m |
| Main Ground Block                   | 35lb-in/3.9N-m   | 35lb-in/3.9N-m   | 35lb-in/3.9N-m   | 35lb-in/3.9N-m   | 35lb-in/3.9N-m   |
| Motor Distribution Block (PDB2 & 3) | 40lb-in/4.5N-m   | 120lb-in/13.5N-m | 120lb-in/13.5N-m | 120lb-in/13.5N-m | 120lb-in/13.5N-m |
| Motor Ground Block                  | 35lb-in/4.0N-m   | 45lb-in/5.1N-m   | 45lb-in/5.1N-m   | 45lb-in/5.1N-m   | 45lb-in/5.1N-m   |

| Control Panel Fuse Schedule |           |         |        |                              |
|-----------------------------|-----------|---------|--------|------------------------------|
| Fuse                        | Type      | Voltage | Amps   | Description                  |
| F12                         | AGC-10    | 250     | 10A    | Power Supply 1 Secondary     |
| F13                         | AGC-10    | 250     | 10A    | Power Supply 2 Secondary     |
| F14                         | AGC-10    | 250     | 10A    | Control Power                |
| F15                         | AGC-10    | 250     | 10A    | Batteries                    |
| F16                         | AGC-2     | 250     | 2A     | Radio Power Supply Primary   |
| F17                         | AGC-2     | 250     | 2A     | Radio Power Supply Secondary |
| F18                         | AGC-1/4   | 250     | 1/4A   | Pump 1 Moter Thermal         |
| F19                         | AGC-1/4   | 250     | 1/4A   | Pump 2 Moter Thermal         |
| F20                         | AGC-1/10  | 250     | 1/10A  | Operator Interface           |
| F21                         | AGC-1     | 250     | 1A     | Digital Inputs 0.0-1.4       |
| F22                         | AGC-1     | 250     | 1A     | Digital Inputs 1.5-2.7       |
| F23                         | AGC-2     | 250     | 2A     | Digital Outputs 0.0-0.7      |
| F24                         | AGC-2     | 250     | 2A     | Digital Outputs 1.0-1.7      |
| F25                         | AGC-1-1/2 | 250     | 1-1/2A | PLC Power                    |
| F26                         | AGC-3/4   | 250     | 3/4A   | Process Transmitter Supply   |
| F27                         | AGC-1/10  | 250     | 1/10A  | Analog Inputs                |
| F28                         | AGC-1/10  | 250     | 1/10A  | Analog Outputs               |
| F29                         | GMA-1/4   | 250     | 1/4A   | Analog Input 2               |
| F30                         | GMA-1/4   | 250     | 1/4A   | Analog Input 3               |
| F31                         | GMA-1/4   | 250     | 1/4A   | Analog Input 4               |

| HMI BUTTON LEGEND |                              |
|-------------------|------------------------------|
| F1                | FAULT RESET/ENABLE INTRUSION |
| SHIFT+F1          | DISABLE INTRUSION            |
| F2                | ALTERNATE PUMP ASSIGNMENTS   |
| F3                | RESET PUMP 1 RUNTIME         |
| SHIFT+F3          | RESET PUMP 2 RUNTIME         |
| F4                | ALARMS SCREEN                |
| F5                | OVERVIEW SCREEN              |
| F6                | PUMP 1 SCREEN                |
| F7                | PUMP 2 SCREEN                |
| F8                | SETPOINTS SCREEN             |

CONTROL PANEL ISR INFORMATION TAGS

THIS AREA IN BLUE IS FOR INTRINSICALLY SAFE CIRCUITS AND DEVICES ONLY. THIS AREA INCLUDES THE AIR SPACE DIRECTLY IN FRONT OF THE BLUE AREA BETWEEN THE BACKPANEL AND THE ENCLOSURE WALLS AND DOOR INCLUDING THE BOTTOM OF THE ENCLOSURE. ONLY INTRINSICALLY SAFE DEVICES AND WIRING ARE ALLOWED IN THIS AREA. DO NOT ROUTE NON-INTRINSICALLY SAFE WIRING THROUGH THIS AREA OF ENCLOSURE.

WARNING

SUBSTITUTION OF COMPONENTS MAY IMPAIR INTRINSIC SAFETY

CONTROL PANEL EXTERIOR TAG INFORMATION

WARNING

TO PREVENT IGNITION OF FLAMMABLE OR COMBUSTIBLE ATMOSPHERES DISCONNECT POWER BEFORE SERVICING

PROVIDES INTRINSICALLY SAFE CIRCUIT EXTENSIONS FOR USE IN CLASS 1, GROUPS A, B, C, AND D WHEN CONNECTED PER REFERENCE DRAWINGS ON MAIN NAMEPLATE LABEL

CONTROL PANEL DEADFRONT TAG INFORMATION

SECURELY FASTEN ALL INNER DOOR LATCHES BEFORE CLOSING OUTER DOOR. FAILURE TO FOLLOW THESE INSTRUCTIONS COULD CAUSE THE OUTER DOOR TO JAM WHEN RE-OPENED

|                  |
|------------------|
| Drawn:           |
| Designed:        |
| Checked:         |
| Date: 12/18/2014 |
| Scale:           |
| Project No:      |
| Sheet No. 15     |
| Of 18 Sheets     |

CONTROL / INSTALLATION DRAWING  
MACX MCR-EX Series

Doc.-No.: 83104549-04


Art.Nr.     Model Number

2865476    MACX MCR-EX-SL-2NAM-RO  
~~2924087    MACX MCR-EX-SL-2NAM-RO-SP~~

WARNING – EXPLOSION HAZARD – Substitution of components may impair suitability for Class I, Division 2.

WARNING – EXPLOSION HAZARD – Do not disconnect equipment unless power has been removed or the area is known to be non-hazardous.

WARNING – Exposure to some chemicals may degrade the sealing properties of materials used in the sealed relays.

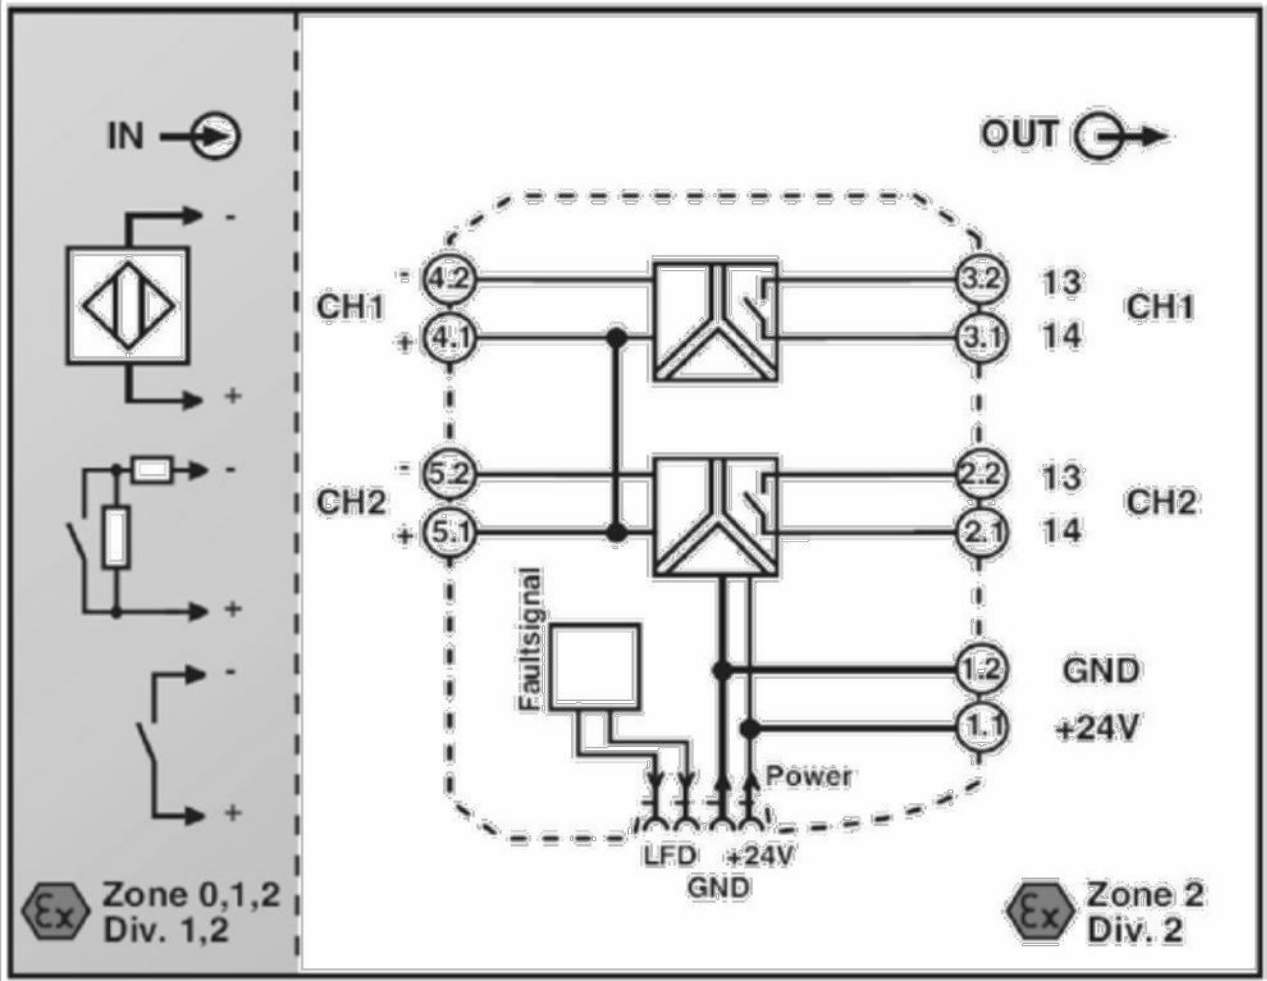

**HAZARDOUS AREA**  
Class I, Division 1, Groups A,B,C,D  
Class II, Division 1, Groups E,F,G  
Class III, Division 1  
Class I, Zone 0,1,2, Groups IIC,IIB,IIA

**NON HAZARDOUS AREA**  
or Class I, Division 2, Groups A,B,C,D  
or Class I, Zone 2, Groups IIC,IIB,IIA


- I. The Entity Concept allows interconnection of intrinsically safe apparatus with associated apparatus not specifically examined in combination as a system. Selected Intrinsically Safe Equipment must be third party listed as intrinsically safe for the application and have intrinsically safe entity parameters conforming with table 1 below:
- Tabelle 1:
- | I.S. Equipment                     |   | Associated Apparatus                |
|------------------------------------|---|-------------------------------------|
| V max (or U <sub>i</sub> )         | ≥ | Voc or Vt (or U <sub>o</sub> )      |
| I max (or I <sub>i</sub> )         | ≥ | Isc or It (or I <sub>o</sub> )      |
| P max (or P <sub>i</sub> )         | ≥ | P <sub>o</sub>                      |
| C <sub>i</sub> + C <sub>able</sub> | ≤ | C <sub>a</sub> (or C <sub>o</sub> ) |
| L <sub>i</sub> + L <sub>able</sub> | ≤ | L <sub>a</sub> (or L <sub>o</sub> ) |
- II. Capacitance and inductance of the field wiring from the intrinsically safe equipment to the associated apparatus shall be calculated and must be included in the system calculations as shown under I. Where the cable capacitance and inductance per foot are not known, the following values shall be used: C<sub>able</sub> = 60 pF / ft., L<sub>able</sub> = 0.2 µH / ft.
- III. The output current of this associated apparatus is limited by a resistor such that the output voltage-current plot is a straight line drawn between open-circuit voltage and short-circuit current.
- IV. This associated apparatus has not been evaluated for use in combination with another associated apparatus.
- V. This associated apparatus may also be connected to simple apparatus as defined in Article 504.2 and installed and temperature classified in accordance with Article 504.10(B) of the National Electrical Code (ANSI/NFPA70), or other local codes applicable.
- VI. Associated apparatus must be installed in an enclosure (which meets the requirements of ANSI/ISA S82) suitable for the application in accordance with the National Electrical Code (ANSI/NFPA 70) for installation in the United States, the Canadian Electrical Code for installation in Canada, or other local codes, as applicable.
- VII. When using as non-incendive device for Class I, Division 2 or Class I, Zone 2 do not snap equipment onto or off the T-connector, or connect and disconnect non-intrinsically safe-lines unless power has been removed or the area is known to be non hazardous.
- VIII. Intrinsically safe circuits must be wired separately in according with Article 504.20 of the National Electrical Code (ANSI/NFPA 70) for installation in the United States, the Canadian Electrical Code Part 1, Appendix F for installation in Canada, or other local codes, as applicable.
- IX. When multiple circuits extend from the same piece of associated apparatus, they must be installed in separate cables or in one cable having suitable insulation. Refer to Article 504.30(B) of the National Electrical Code (ANSI/NFPA 70) and Instrument Society of America Recommended Practice ISA RP12.6 for installing intrinsically safe equipment.
- X. When using as non-incendive device for Class I, Division 2 or Class I, Zone 2 with exposure to some chemicals a periodically inspect of the relays for any degradation of properties and a replacement if degradation is found is recommended.

|         |                           | output circuit - hazardous zone |                 |                |         |         |            | Group A, B or IIC |               | Group C or IIB |               | Group D or IIA |               | input circuit - hazardous zone |                |                 |         |         |
|---------|---------------------------|---------------------------------|-----------------|----------------|---------|---------|------------|-------------------|---------------|----------------|---------------|----------------|---------------|--------------------------------|----------------|-----------------|---------|---------|
| Art.Nr. | Model Number              | Terminal                        | Voc or Uo / Vdc | Isc or Io / mA | Po / mW | Ci / nF | Li / mH    | Ca or Co / nF     | La or Lo / mH | Ca or Co / nF  | La or Lo / mH | Ca or Co / nF  | La or Lo / mH | Terminal                       | Vmax or Ui / V | Imax or Ii / mA | Ci / nF | Li / mH |
| 2865476 | MACX MCR-EX-SL-2NAM-RO    | 4.1-4.2<br>5.1.5.2              | 9,6             | 10             | 25      | 1,1     | negligible | 510               | 100           | 2700           | 100           | -              | -             | -                              | -              | -               | -       | -       |
|         |                           |                                 |                 |                |         |         |            | 840               | 5             | 4400           | 5             |                |               |                                |                |                 |         |         |
|         |                           |                                 |                 |                |         |         |            | 1200              | 1             | 6300           | 1             |                |               |                                |                |                 |         |         |
|         |                           |                                 |                 |                |         |         |            | 3600              | 0,01          | 26000          | 0,01          |                |               |                                |                |                 |         |         |
| 2924087 | MACX MCR-EX-SL-2NAM-RO-SP | 4.1-4.2<br>5.1.5.2              | 9,6             | 10             | 25      | 1,1     | negligible | 510               | 100           | 2700           | 100           | -              | -             | -                              | -              | -               | -       | -       |
|         |                           |                                 |                 |                |         |         |            | 840               | 5             | 4400           | 5             |                |               |                                |                |                 |         |         |
|         |                           |                                 |                 |                |         |         |            | 1200              | 1             | 6300           | 1             |                |               |                                |                |                 |         |         |
|         |                           |                                 |                 |                |         |         |            | 3600              | 0,01          | 26000          | 0,01          |                |               |                                |                |                 |         |         |

|         |                           | power supply circuit |             |                              |                     |  | Max. Surrounding Air Temperature Rating: 60°C | signal circuit - safe zone |        |       | interface circuit |  |
|---------|---------------------------|----------------------|-------------|------------------------------|---------------------|--|-----------------------------------------------|----------------------------|--------|-------|-------------------|--|
| Art.Nr. | Model Number              | Terminal             | T-Connector | Un = 24 V - 20% +25% U range | Um                  |  | Ambient Temperature Range: Tamb               | Terminal                   | output | input | socket            |  |
| 2865476 | MACX MCR-EX-SL-2NAM-RO    | 1.1-1.2              | yes         | 19,2 ... 30 V DC             | 253 V AC / 125 V DC |  | -20...+60°C                                   | 3.1-3.2 + 2.1-2.2          | X      | -     | -                 |  |
| 2924087 | MACX MCR-EX-SL-2NAM-RO-SP | 1.1-1.2              | yes         | 19,2 ... 30 V DC             | 253 V AC / 125 V DC |  | -20...+60°C                                   | 3.1-3.2 + 2.1-2.2          | X      | -     | -                 |  |

| REVISIONS | BY |
|-----------|----|
|           |    |
|           |    |
|           |    |
|           |    |

IMPROVEMENTS TO WASTEWATER COLLECTION SYSTEM  
LIFT STATION CONSTRUCTION DETAILS  
ELECTRICAL STANDARDS

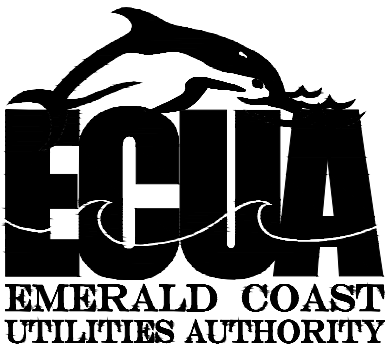





APPROVED BY:

|                  |
|------------------|
| Drawn:           |
| Designed:        |
| Checked:         |
| Date: 12/18/2014 |
| Scale:           |
| Project No:      |
| Sheet No. 16     |
| Of 18 Sheets     |

GENERAL ELECTRICAL NOTES

NEW WORK:

1. ENTIRE ELECTRICAL INSTALLATION SHALL BE IN ACCORDANCE WITH THE LATEST EDITION (UNLESS NOTED OTHERWISE) OF THE FOLLOWING CODES AND STANDARDS:  
1.1. NATIONAL ELECTRICAL CODE (NFPA 70).  
1.2. STANDARD FOR FIRE PROTECTION IN WASTEWATER TREATMENT AND COLLECTION FACILITIES (NFPA 820).
2. THE CONTRACTOR SHALL BE RESPONSIBLE FOR READING ALL PROJECT SPECIFICATIONS AND WILL BE RESPONSIBLE FOR MEETING ALL REQUIREMENTS OUTLINED IN THE SPECIFICATIONS.
3. CONTRACTOR SHALL COORDINATE ALL WORK WITH OTHER TRADES PRIOR TO ROUGH-IN AND INSTALLATION.
4. WORKING SPACE FOR ALL ELECTRICAL AND CONTROL EQUIPMENT OPERATING AT 600V VOLTS OR LESS TO GROUND AND LIKELY TO REQUIRE EXAMINATION, ADJUSTMENT, SERVICING, OR MAINTENANCE WHILE ENERGIZED SHALL COMPLY WITH NEC, ARTICLE 110.26.
5. THE ELECTRICAL DESIGN PROVIDES A NUMBER OF BRANCH CIRCUITS, AMPACITY AND OVERCURRENT PROTECTION FOR OTHER DIVISIONS DESIGN BASIS EQUIPMENT CONFORMING TO MANUFACTURER'S SPECIFICATIONS AVAILABLE AT TIME OF DESIGN. THE CONTRACTOR SHALL VERIFY ALL EQUIPMENT LOADS PRIOR TO ROUGH-IN. IF REQUIREMENTS OF EQUIPMENT ACTUALLY PROVIDED UNDER CONTRACT FOR CONSTRUCTION ARE DIFFERENT, CONTRACTOR SHALL MAKE ALL CHANGES NECESSARY WITHOUT INCREASE IN THE CONTRACT AMOUNT. SUCH CHANGES SHALL BE BASED UPON REQUIREMENTS, NAMEPLATE VALUES AND CODE REQUIREMENTS, WHICHEVER IS MORE STRINGENT, AND MAY INCLUDE, BUT ARE NOT LIMITED TO: SIZE OF CONDUCTORS, SIZE OF CONDUIT, QUANTITY OF CONDUCTORS AND CONDUITS, TYPE AND SIZE OF CIRCUIT BREAKER OR DISCONNECT, OVERLOADS, FULL-VOLTAGE STARTERS, REDUCED VOLTAGE SOFT STARTERS, VARIABLE FREQUENCY DRIVES, AND FUSE PROTECTION.
6. THE ELECTRICAL CONTRACTOR IS REQUIRED TO COORDINATE, PROVIDE, AND INSTALL A FULLY OPERATIONAL AND CODE COMPLIANT ELECTRICAL SYSTEM. THIS MAY INCLUDE THE ADDITION OF ELECTRICAL ITEMS NOT SHOWN ON THE ELECTRICAL PLANS, BUT REQUIRED FOR SYSTEM OPERATION.
7. CONTRACTOR SHALL COORDINATE INSTALLATION OF ELECTRICAL SERVICE WITH ELECTRICAL UTILITY COMPANY PROVIDING ELECTRICAL SERVICE TO FACILITY. CONTRACTOR SHALL PAY ALL FEES ASSESSED BY ELECTRICAL UTILITY COMPANY TO PROVIDE ELECTRICAL SERVICE TO FACILITY.
8. CONTRACTOR SHALL EXCAVATE AND CONDUCT DEMOLITION SO AS TO AVOID DAMAGE TO EXISTING UTILITIES AND OTHER UNDERGROUND OR CONCEALED ITEMS. IF EXISTING OR NEW ITEMS ARE DAMAGED, THE CONTRACTOR SHALL NOTIFY THE OWNER AT ONCE OF ALL DAMAGE AND SHALL REPAIR (OR REPLACE IF NECESSARY) TO THE ORIGINAL CONDITION TO THE SATISFACTION OF OWNER AND ENGINEER AT NO CHARGE IN THE CONTRACT AMOUNT.
9. THE CONTRACTOR SHALL BE RESPONSIBLE FOR PROVIDING DETAILED ELECTRICAL AND CONTROL EQUIPMENT LAYOUT DRAWINGS TO THE ENGINEER AND OWNER FOR APPROVAL PRIOR TO INSTALLATION.
10. ALL CONDUITS NOT LOCATED UNDER SLAB SHALL HAVE A MINIMUM BURIAL DEPTH OF 42", UNLESS NOTED OTHERWISE.
11. CONDUITS SHALL BE BURIED 42" (MINIMUM) BELOW GRADE WITH MARKER TAPE 6" ABOVE TOP OF CONDUIT, UNLESS NOTED OTHERWISE.
12. MINIMUM SIZE CONDUIT SHALL BE 1" (UNLESS NOTED OTHERWISE).
13. CONDUIT ROUTINGS AND DEVICE/EQUIPMENT LOCATIONS SHOWN ARE DIAGRAMMATIC ONLY. CONTRACTOR SHALL FIELD ROUTE AND LOCATE AS REQUIRED.
14. CONTRACTOR SHALL PROVIDE PULL BOXES IN POWER CIRCUIT CONDUIT AS REQUIRED TO LIMIT THE NUMBER OF BENDS TO A MAXIMUM OF 270° OR THREE 90° BENDS.
15. ALL WIRE SHALL BE COPPER.
16. ALL ELECTRICAL CIRCUITS SHALL INCLUDE A GREEN GROUNDING CONDUCTOR SIZED PER NEC.
17. CONDUCTORS SHALL BE TERMINATED ON TERMINAL BLOCKS.
18. THE CONTRACTOR SHALL TAG ALL POWER AND CONTROL SYSTEM CABLING AT ALL TERMINATION POINTS.
19. FINAL CONNECTION TO ALL EQUIPMENT IS SHOWN DIAGRAMMATIC. PROVIDE FINAL CONNECTION AS REQUIRED PER MANUFACTURER OF EQUIPMENT.
20. CONTRACTOR SHALL MAINTAIN A SET OF PRINTS AND MARK-UP DURING CONSTRUCTION TO REFLECT "AS-BUILT" CONDITIONS. PRINTS SHALL BE DELIVERED TO THE ENGINEER UPON COMPLETION OF THE PROJECT.
21. ALL HARDWARE SHALL BE STAINLESS STEEL.
22. ALUMINUM CONDUIT SHALL BE COATED WITH (2) WRAPS OF ANTI-CORROSION TAPE OR RUN THROUGH A SCHEDULE 80 PVC SLEEVE TO WHEN IN CONTACT WITH CONCRETE.
23. BARE COPPER SHALL BE COATED WITH (2) WRAPS OF ANTI-CORROSION TAPE OR RUN THROUGH A SCHEDULE 80 PVC SLEEVE TO WHEN IN CONTACT WITH CONCRETE.
24. ENGINEER OF RECORD SHALL BE RESPONSIBLE FOR FINAL SIZING OF ALL EQUIPMENT.

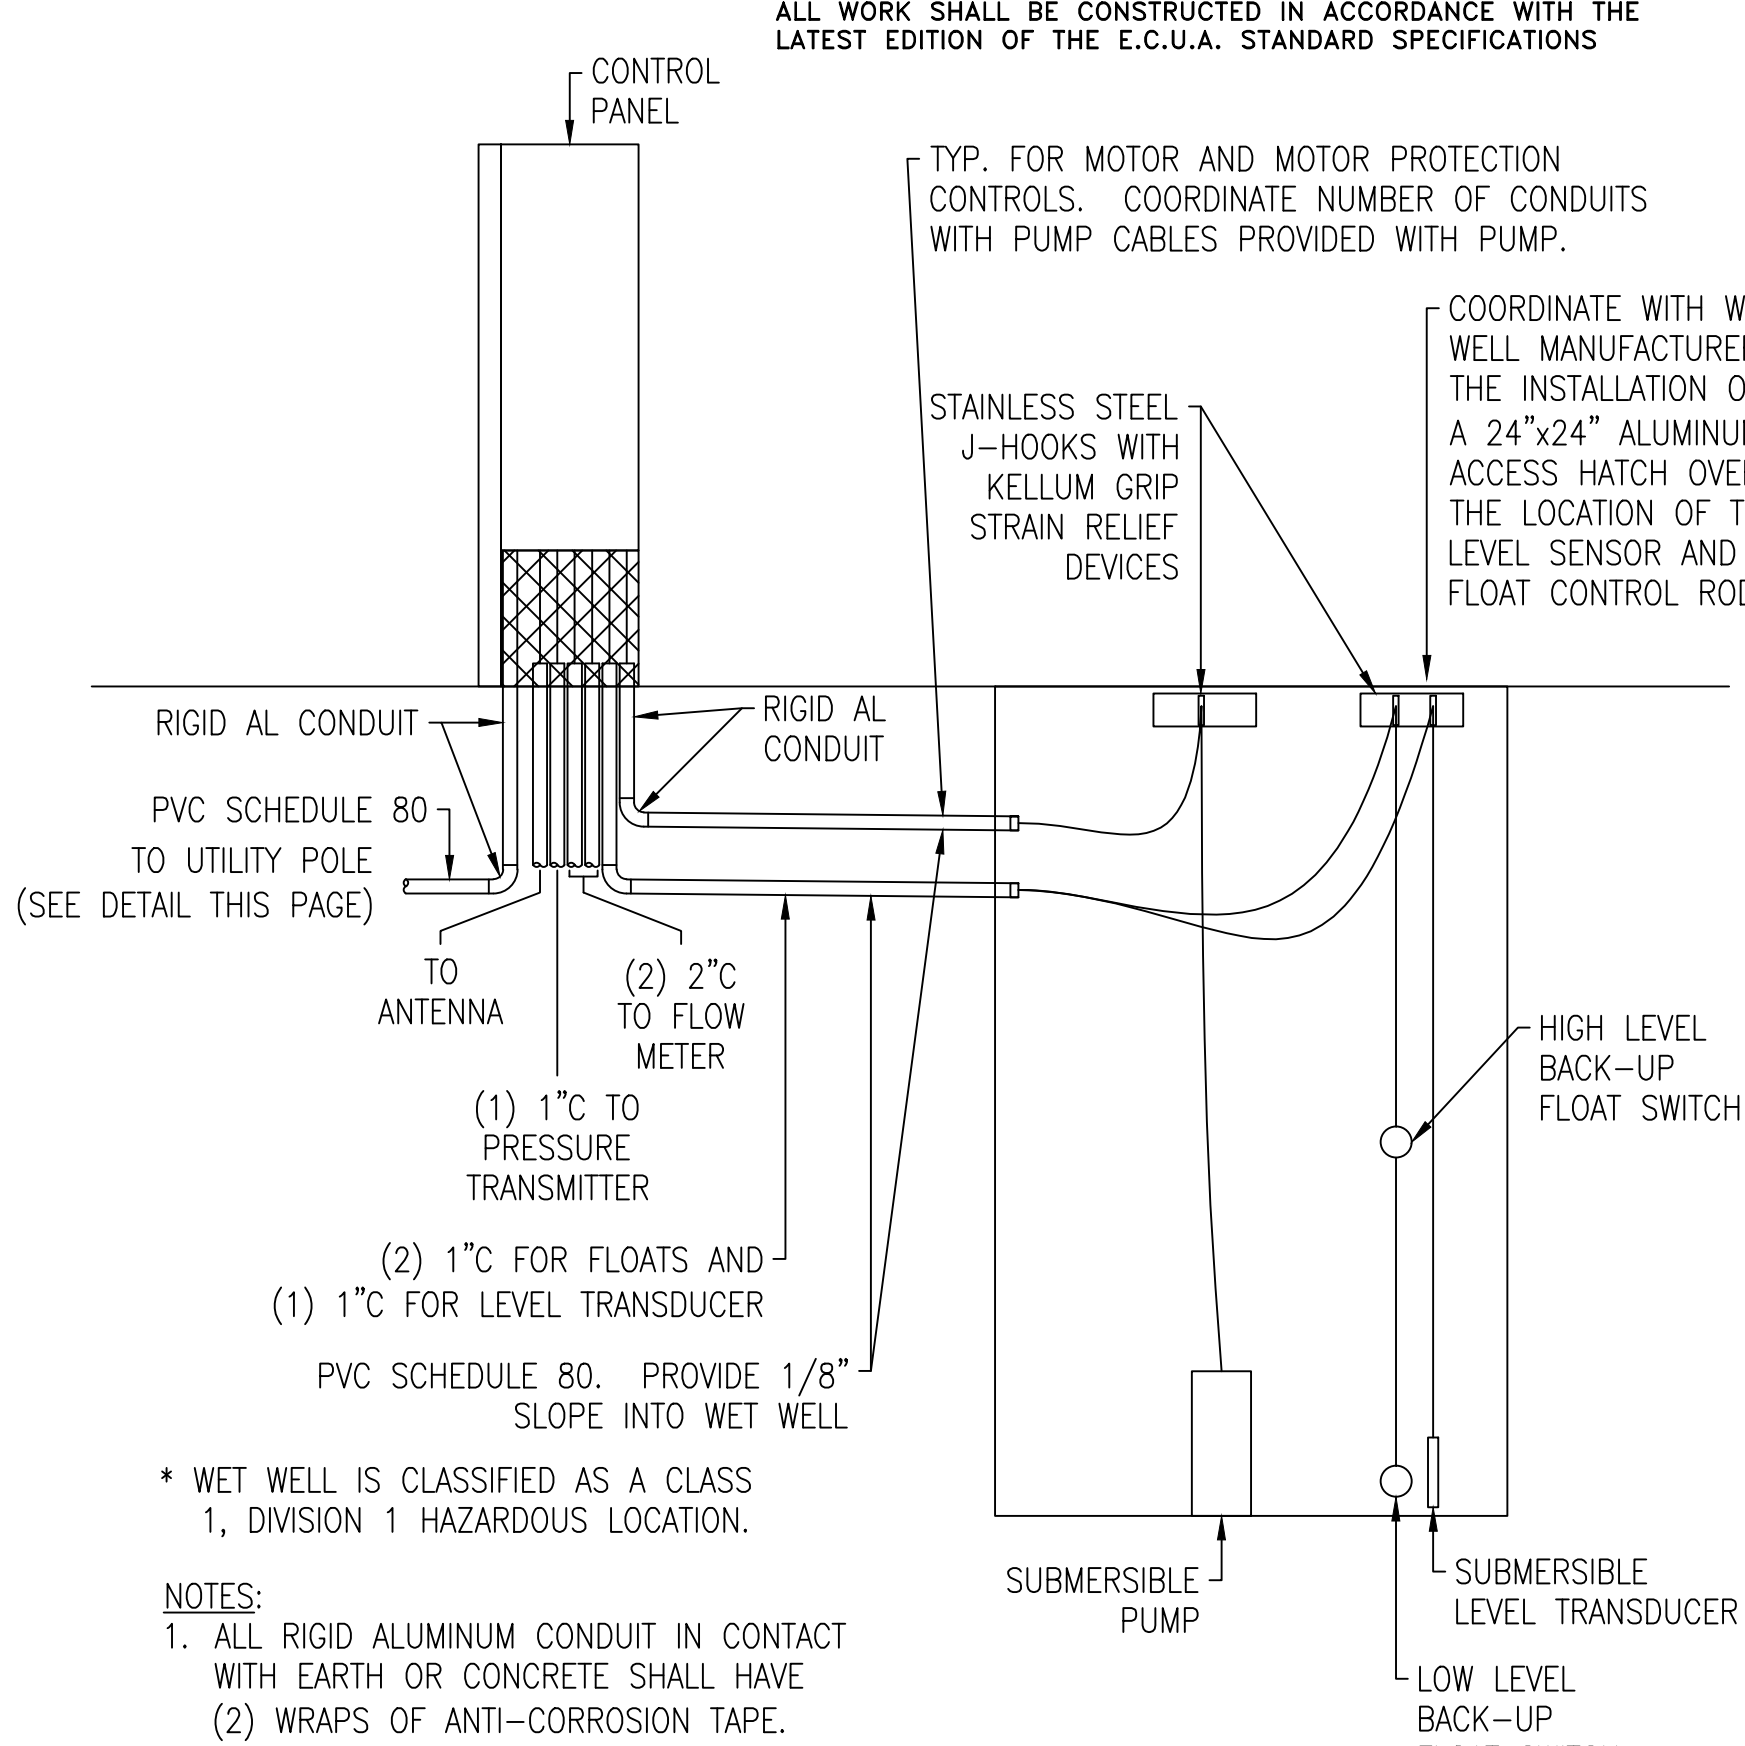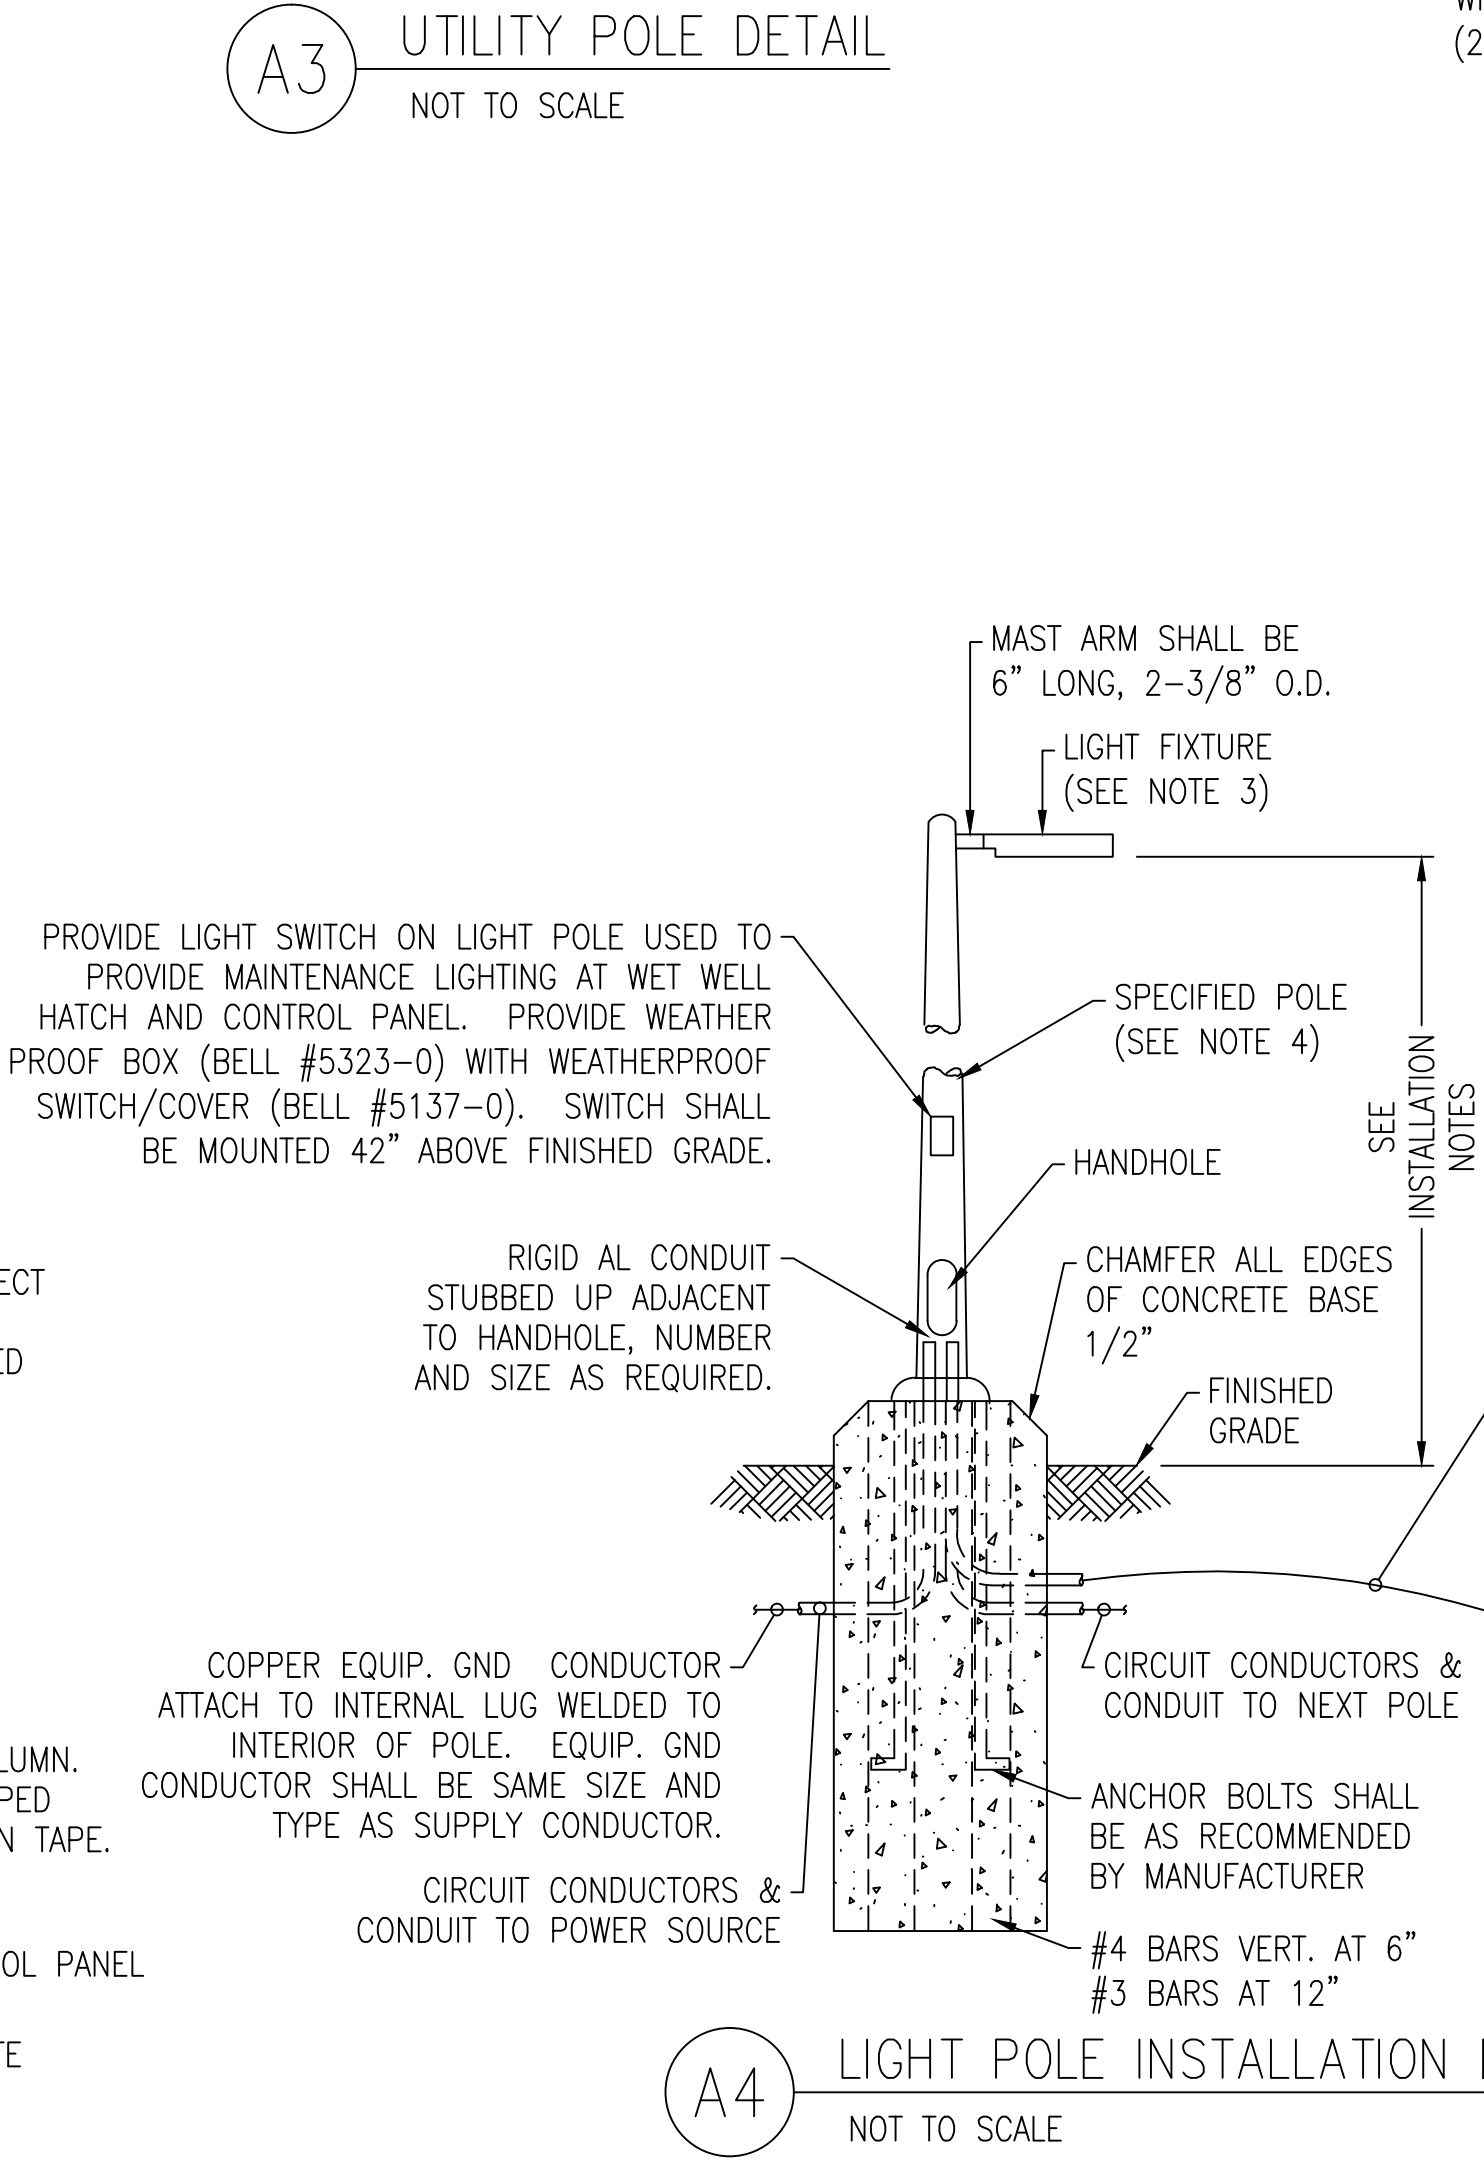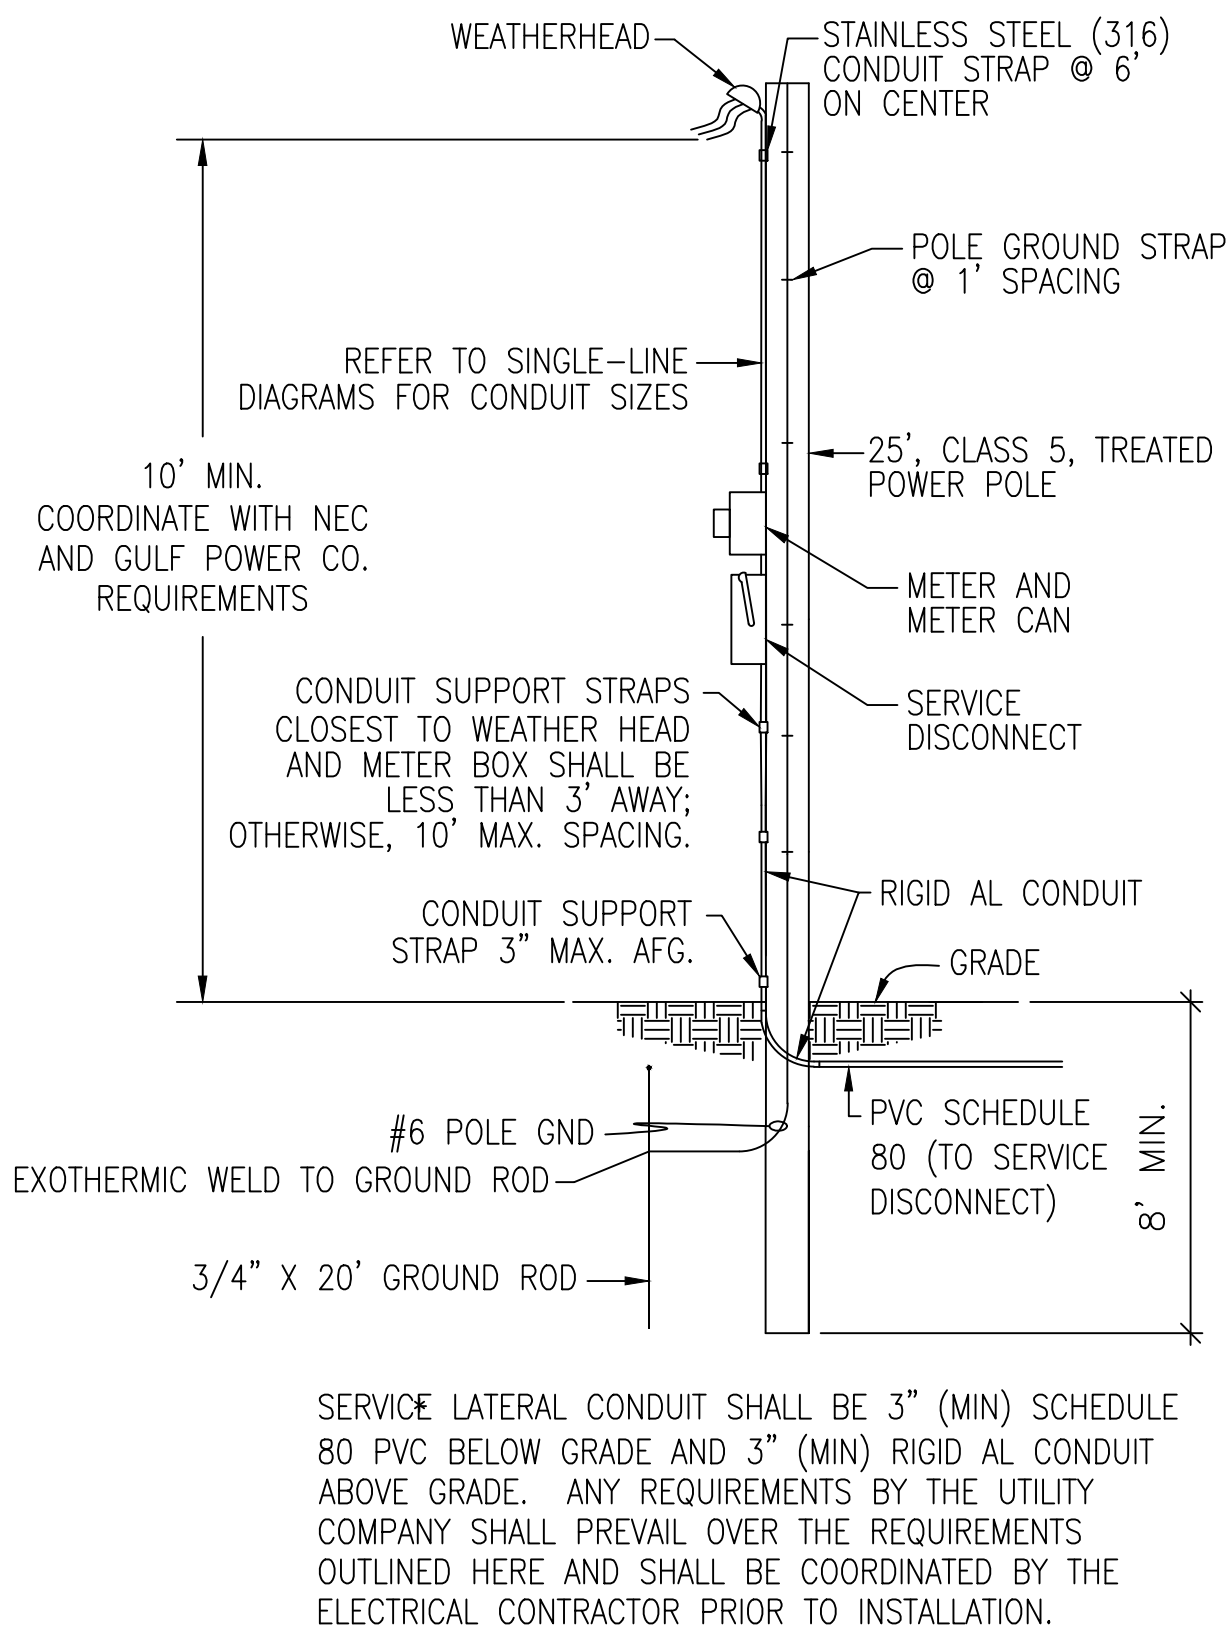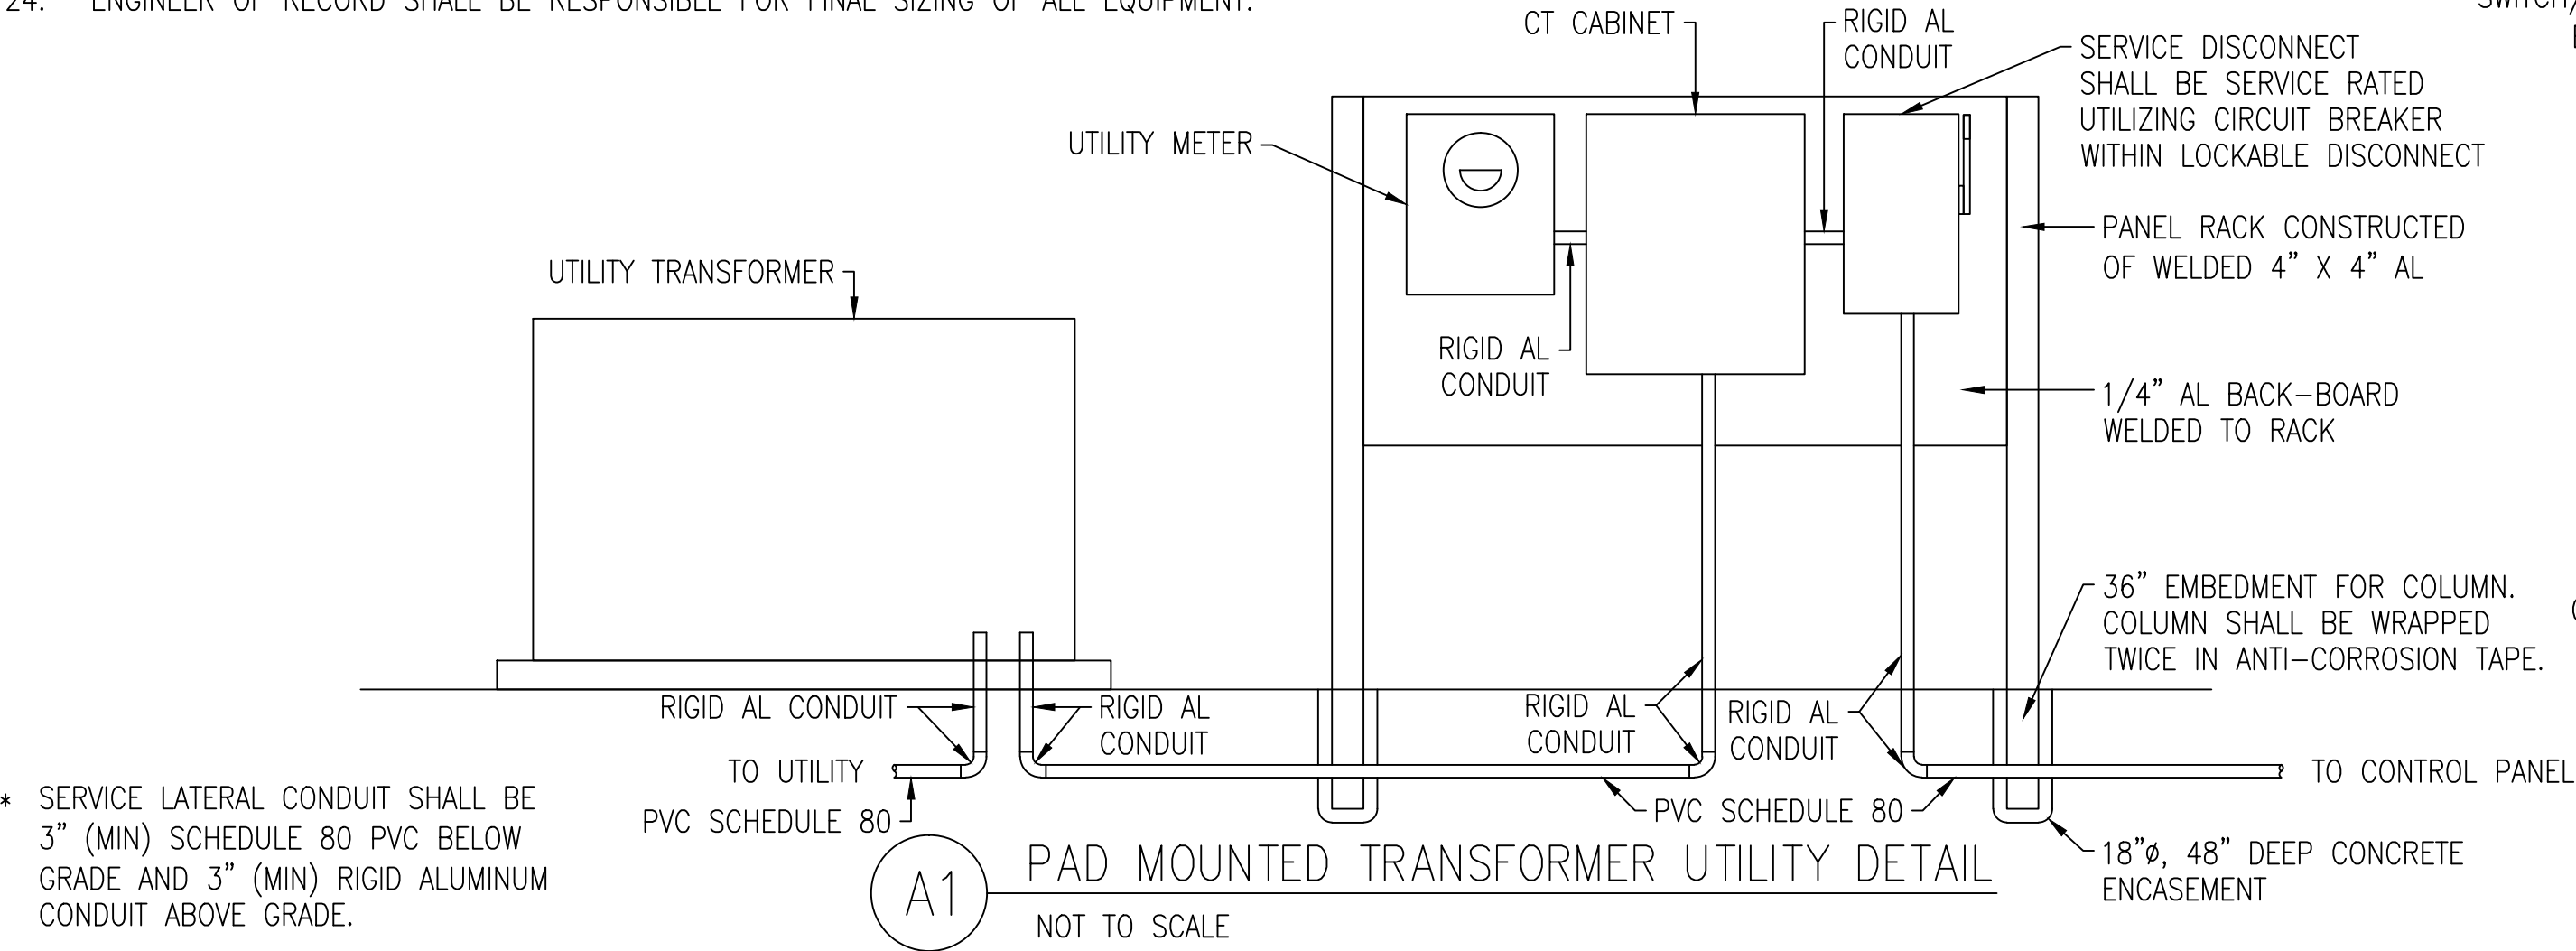

ALL WORK SHALL BE CONSTRUCTED IN ACCORDANCE WITH THE LATEST EDITION OF THE E.C.U.A. STANDARD SPECIFICATIONS

TYP. FOR MOTOR AND MOTOR PROTECTION CONTROLS. COORDINATE NUMBER OF CONDUITS WITH PUMP CABLES PROVIDED WITH PUMP.

COORDINATE WITH WET WELL MANUFACTURER THE INSTALLATION OF A 24"x24" ALUMINUM ACCESS HATCH OVER THE LOCATION OF THE LEVEL SENSOR AND FLOAT CONTROL ROD.

RIGID AL CONDUIT

PVC SCHEDULE 80 TO UTILITY POLE (SEE DETAIL THIS PAGE)

TO ANTENNA

(2) 2"C TO FLOW METER

(1) 1"C TO PRESSURE TRANSMITTER

(2) 1"C FOR FLOATS AND (1) 1"C FOR LEVEL TRANSDUCER

PVC SCHEDULE 80. PROVIDE 1/8" SLOPE INTO WET WELL

\* WET WELL IS CLASSIFIED AS A CLASS 1, DIVISION 1 HAZARDOUS LOCATION.

NOTES:

1. ALL RIGID ALUMINUM CONDUIT IN CONTACT WITH EARTH OR CONCRETE SHALL HAVE

(2) WRAPS OF ANTI-CORROSION TAPE.

CONTROL PANEL

STAINLESS STEEL J-HOOKS WITH KELLUM GRIP STRAIN RELIEF DEVICES

HIGH LEVEL BACK-UP FLOAT SWITCH

SUBMERSIBLE PUMP

SUBMERSIBLE LEVEL TRANSDUCER

LOW LEVEL BACK-UP FLOAT SWITCH

GRADE

10' MIN. COORDINATE WITH NEC AND GULF POWER CO. REQUIREMENTS

WEATHERHEAD

STAINLESS STEEL (316) CONDUIT STRAP @ 6" ON CENTER

POLE GROUND STRAP @ 1' SPACING

METER AND METER CAN

SERVICE DISCONNECT

RIGID AL CONDUIT

GRADE

PVC SCHEDULE 80 (TO SERVICE DISCONNECT)

8' MIN.

3/4" X 20' GROUND ROD

#6 POLE GND

EXOTHERMIC WELD TO GROUND ROD

CONDUIT SUPPORT STRAP 3" MAX. AFG.

CONDUIT SUPPORT STRAPS CLOSEST TO WEATHER HEAD AND METER BOX SHALL BE LESS THAN 3' AWAY; OTHERWISE, 10' MAX. SPACING.

REFER TO SINGLE-LINE DIAGRAMS FOR CONDUIT SIZES

10' MIN. COORDINATE WITH NEC AND GULF POWER CO. REQUIREMENTS

WEATHERHEAD

STAINLESS STEEL (316) CONDUIT STRAP @ 6" ON CENTER

POLE GROUND STRAP @ 1' SPACING

METER AND METER CAN

SERVICE DISCONNECT

RIGID AL CONDUIT

GRADE

PVC SCHEDULE 80 (TO SERVICE DISCONNECT)

8' MIN.

3/4" X 20' GROUND ROD

#6 POLE GND

EXOTHERMIC WELD TO GROUND ROD

CONDUIT SUPPORT STRAP 3" MAX. AFG.

CONDUIT SUPPORT STRAPS CLOSEST TO WEATHER HEAD AND METER BOX SHALL BE LESS THAN 3' AWAY; OTHERWISE, 10' MAX. SPACING.

REFER TO SINGLE-LINE DIAGRAMS FOR CONDUIT SIZES

10' MIN. COORDINATE WITH NEC AND GULF POWER CO. REQUIREMENTS

WEATHERHEAD

STAINLESS STEEL (316) CONDUIT STRAP @ 6" ON CENTER

POLE GROUND STRAP @ 1' SPACING

METER AND METER CAN

SERVICE DISCONNECT

RIGID AL CONDUIT

GRADE

PVC SCHEDULE 80 (TO SERVICE DISCONNECT)

8' MIN.

3/4" X 20' GROUND ROD

#6 POLE GND

EXOTHERMIC WELD TO GROUND ROD

CONDUIT SUPPORT STRAP 3" MAX. AFG.

CONDUIT SUPPORT STRAPS CLOSEST TO WEATHER HEAD AND METER BOX SHALL BE LESS THAN 3' AWAY; OTHERWISE, 10' MAX. SPACING.

REFER TO SINGLE-LINE DIAGRAMS FOR CONDUIT SIZES

10' MIN. COORDINATE WITH NEC AND GULF POWER CO. REQUIREMENTS

WEATHERHEAD

STAINLESS STEEL (316) CONDUIT STRAP @ 6" ON CENTER

POLE GROUND STRAP @ 1' SPACING

METER AND METER CAN

SERVICE DISCONNECT

RIGID AL CONDUIT

GRADE

PVC SCHEDULE 80 (TO SERVICE DISCONNECT)

8' MIN.

3/4" X 20' GROUND ROD

#6 POLE GND

EXOTHERMIC WELD TO GROUND ROD

CONDUIT SUPPORT STRAP 3" MAX. AFG.

CONDUIT SUPPORT STRAPS CLOSEST TO WEATHER HEAD AND METER BOX SHALL BE LESS THAN 3' AWAY; OTHERWISE, 10' MAX. SPACING.

REFER TO SINGLE-LINE DIAGRAMS FOR CONDUIT SIZES

10' MIN. COORDINATE WITH NEC AND GULF POWER CO. REQUIREMENTS

WEATHERHEAD

STAINLESS STEEL (316) CONDUIT STRAP @ 6" ON CENTER

POLE GROUND STRAP @ 1' SPACING

METER AND METER CAN

SERVICE DISCONNECT

RIGID AL CONDUIT

GRADE

PVC SCHEDULE 80 (TO SERVICE DISCONNECT)

8' MIN.

3/4" X 20' GROUND ROD

#6 POLE GND

EXOTHERMIC WELD TO GROUND ROD

CONDUIT SUPPORT STRAP 3" MAX. AFG.

CONDUIT SUPPORT STRAPS CLOSEST TO WEATHER HEAD AND METER BOX SHALL BE LESS THAN 3' AWAY; OTHERWISE, 10' MAX. SPACING.

REFER TO SINGLE-LINE DIAGRAMS FOR CONDUIT SIZES

10' MIN. COORDINATE WITH NEC AND GULF POWER CO. REQUIREMENTS

WEATHERHEAD

STAINLESS STEEL (316) CONDUIT STRAP @ 6" ON CENTER

POLE GROUND STRAP @ 1' SPACING

METER AND METER CAN

SERVICE DISCONNECT

RIGID AL CONDUIT

GRADE

PVC SCHEDULE 80 (TO SERVICE DISCONNECT)

8' MIN.

3/4" X 20' GROUND ROD

#6 POLE GND

EXOTHERMIC WELD TO GROUND ROD

CONDUIT SUPPORT STRAP 3" MAX. AFG.

CONDUIT SUPPORT STRAPS CLOSEST TO WEATHER HEAD AND METER BOX SHALL BE LESS THAN 3' AWAY; OTHERWISE, 10' MAX. SPACING.

REFER TO SINGLE-LINE DIAGRAMS FOR CONDUIT SIZES

10' MIN. COORDINATE WITH NEC AND GULF POWER CO. REQUIREMENTS

WEATHERHEAD

STAINLESS STEEL (316) CONDUIT STRAP @ 6" ON CENTER

POLE GROUND STRAP @ 1' SPACING

METER AND METER CAN

SERVICE DISCONNECT

RIGID AL CONDUIT

GRADE

PVC SCHEDULE 80 (TO SERVICE DISCONNECT)

8' MIN.

3/4" X 20' GROUND ROD

#6 POLE GND

EXOTHERMIC WELD TO GROUND ROD

CONDUIT SUPPORT STRAP 3" MAX. AFG.

CONDUIT SUPPORT STRAPS CLOSEST TO WEATHER HEAD AND METER BOX SHALL BE LESS THAN 3' AWAY; OTHERWISE, 10' MAX. SPACING.

REFER TO SINGLE-LINE DIAGRAMS FOR CONDUIT SIZES

10' MIN. COORDINATE WITH NEC AND GULF POWER CO. REQUIREMENTS

WEATHERHEAD

STAINLESS STEEL (316) CONDUIT STRAP @ 6" ON CENTER

POLE GROUND STRAP @ 1' SPACING

METER AND METER CAN

SERVICE DISCONNECT

RIGID AL CONDUIT

GRADE

PVC SCHEDULE 80 (TO SERVICE DISCONNECT)

8' MIN.

3/4" X 20' GROUND ROD

#6 POLE GND

EXOTHERMIC WELD TO GROUND ROD

CONDUIT SUPPORT STRAP 3" MAX. AFG.

CONDUIT SUPPORT STRAPS CLOSEST TO WEATHER HEAD AND METER BOX SHALL BE LESS THAN 3' AWAY; OTHERWISE, 10' MAX. SPACING.

REFER TO SINGLE-LINE DIAGRAMS FOR CONDUIT SIZES

10' MIN. COORDINATE WITH NEC AND GULF POWER CO. REQUIREMENTS

WEATHERHEAD

STAINLESS STEEL (316) CONDUIT STRAP @ 6" ON CENTER

POLE GROUND STRAP @ 1' SPACING

METER AND METER CAN

SERVICE DISCONNECT

RIGID AL CONDUIT

GRADE

PVC SCHEDULE 80 (TO SERVICE DISCONNECT)

8' MIN.

3/4" X 20' GROUND ROD

#6 POLE GND

EXOTHERMIC WELD TO GROUND ROD

CONDUIT SUPPORT STRAP 3" MAX. AFG.

CONDUIT SUPPORT STRAPS CLOSEST TO WEATHER HEAD AND METER BOX SHALL BE LESS THAN 3' AWAY; OTHERWISE, 10' MAX. SPACING.

REFER TO SINGLE-LINE DIAGRAMS FOR CONDUIT SIZES

10' MIN. COORDINATE WITH NEC AND GULF POWER CO. REQUIREMENTS

WEATHERHEAD

STAINLESS STEEL (316) CONDUIT STRAP @ 6" ON CENTER

POLE GROUND STRAP @ 1' SPACING

METER AND METER CAN

SERVICE DISCONNECT

RIGID AL CONDUIT

GRADE

PVC SCHEDULE 80 (TO SERVICE DISCONNECT)

8' MIN.

3/4" X 20' GROUND ROD

#6 POLE GND

EXOTHERMIC WELD TO GROUND ROD

CONDUIT SUPPORT STRAP 3" MAX. AFG.

CONDUIT SUPPORT STRAPS CLOSEST TO WEATHER HEAD AND METER BOX SHALL BE LESS THAN 3' AWAY; OTHERWISE, 10' MAX. SPACING.

REFER TO SINGLE-LINE DIAGRAMS FOR CONDUIT SIZES

10' MIN. COORDINATE WITH NEC AND GULF POWER CO. REQUIREMENTS

WEATHERHEAD

STAINLESS STEEL (316) CONDUIT STRAP @ 6" ON CENTER

POLE GROUND STRAP @ 1' SPACING

METER AND METER CAN

SERVICE DISCONNECT

RIGID AL CONDUIT

GRADE

PVC SCHEDULE 80 (TO SERVICE DISCONNECT)

8' MIN.

3/4" X 20' GROUND ROD

#6 POLE GND

EXOTHERMIC WELD TO GROUND ROD

CONDUIT SUPPORT STRAP 3" MAX. AFG.

CONDUIT SUPPORT STRAPS CLOSEST TO WEATHER HEAD AND METER BOX SHALL BE LESS THAN 3' AWAY; OTHERWISE, 10' MAX. SPACING.

REFER TO SINGLE-LINE DIAGRAMS FOR CONDUIT SIZES

10' MIN. COORDINATE WITH NEC AND GULF POWER CO. REQUIREMENTS

WEATHERHEAD

STAINLESS STEEL (316) CONDUIT STRAP @ 6" ON CENTER

POLE GROUND STRAP @ 1' SPACING

METER AND METER CAN

SERVICE DISCONNECT

RIGID AL CONDUIT

GRADE

PVC SCHEDULE 80 (TO SERVICE DISCONNECT)

8' MIN.

3/4" X 20' GROUND ROD

#6 POLE GND

EXOTHERMIC WELD TO GROUND ROD

CONDUIT SUPPORT STRAP 3" MAX. AFG.

CONDUIT SUPPORT STRAPS CLOSEST TO WEATHER HEAD AND METER BOX SHALL BE LESS THAN 3' AWAY; OTHERWISE, 10' MAX. SPACING.

REFER TO SINGLE-LINE DIAGRAMS FOR CONDUIT SIZES

10' MIN. COORDINATE WITH NEC AND GULF POWER CO. REQUIREMENTS

WEATHERHEAD

STAINLESS STEEL (316) CONDUIT STRAP @ 6" ON CENTER

POLE GROUND STRAP @ 1' SPACING

METER AND METER CAN

SERVICE DISCONNECT

RIGID AL CONDUIT

GRADE

PVC SCHEDULE 80 (TO SERVICE DISCONNECT)


8' MIN.

3/4" X 20' GROUND ROD

#6 POLE GND


| REVISIONS | BY |
|-----------|----|
|           |    |
|           |    |
|           |    |
|           |    |

IMPROVEMENTS TO WASTEWATER COLLECTION SYSTEM  
LIFT STATION CONSTRUCTION DETAILS  
ELECTRICAL STANDARDS

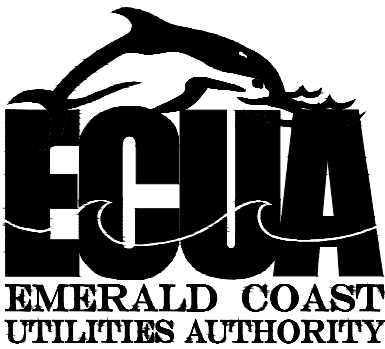


APPROVED BY:

|                  |
|------------------|
| Drawn:           |
| Designed:        |
| Checked:         |
| Date: 12/18/2014 |
| Scale:           |
| Project No:      |
| Sheet No. 18     |
| Of 18 Sheets     |

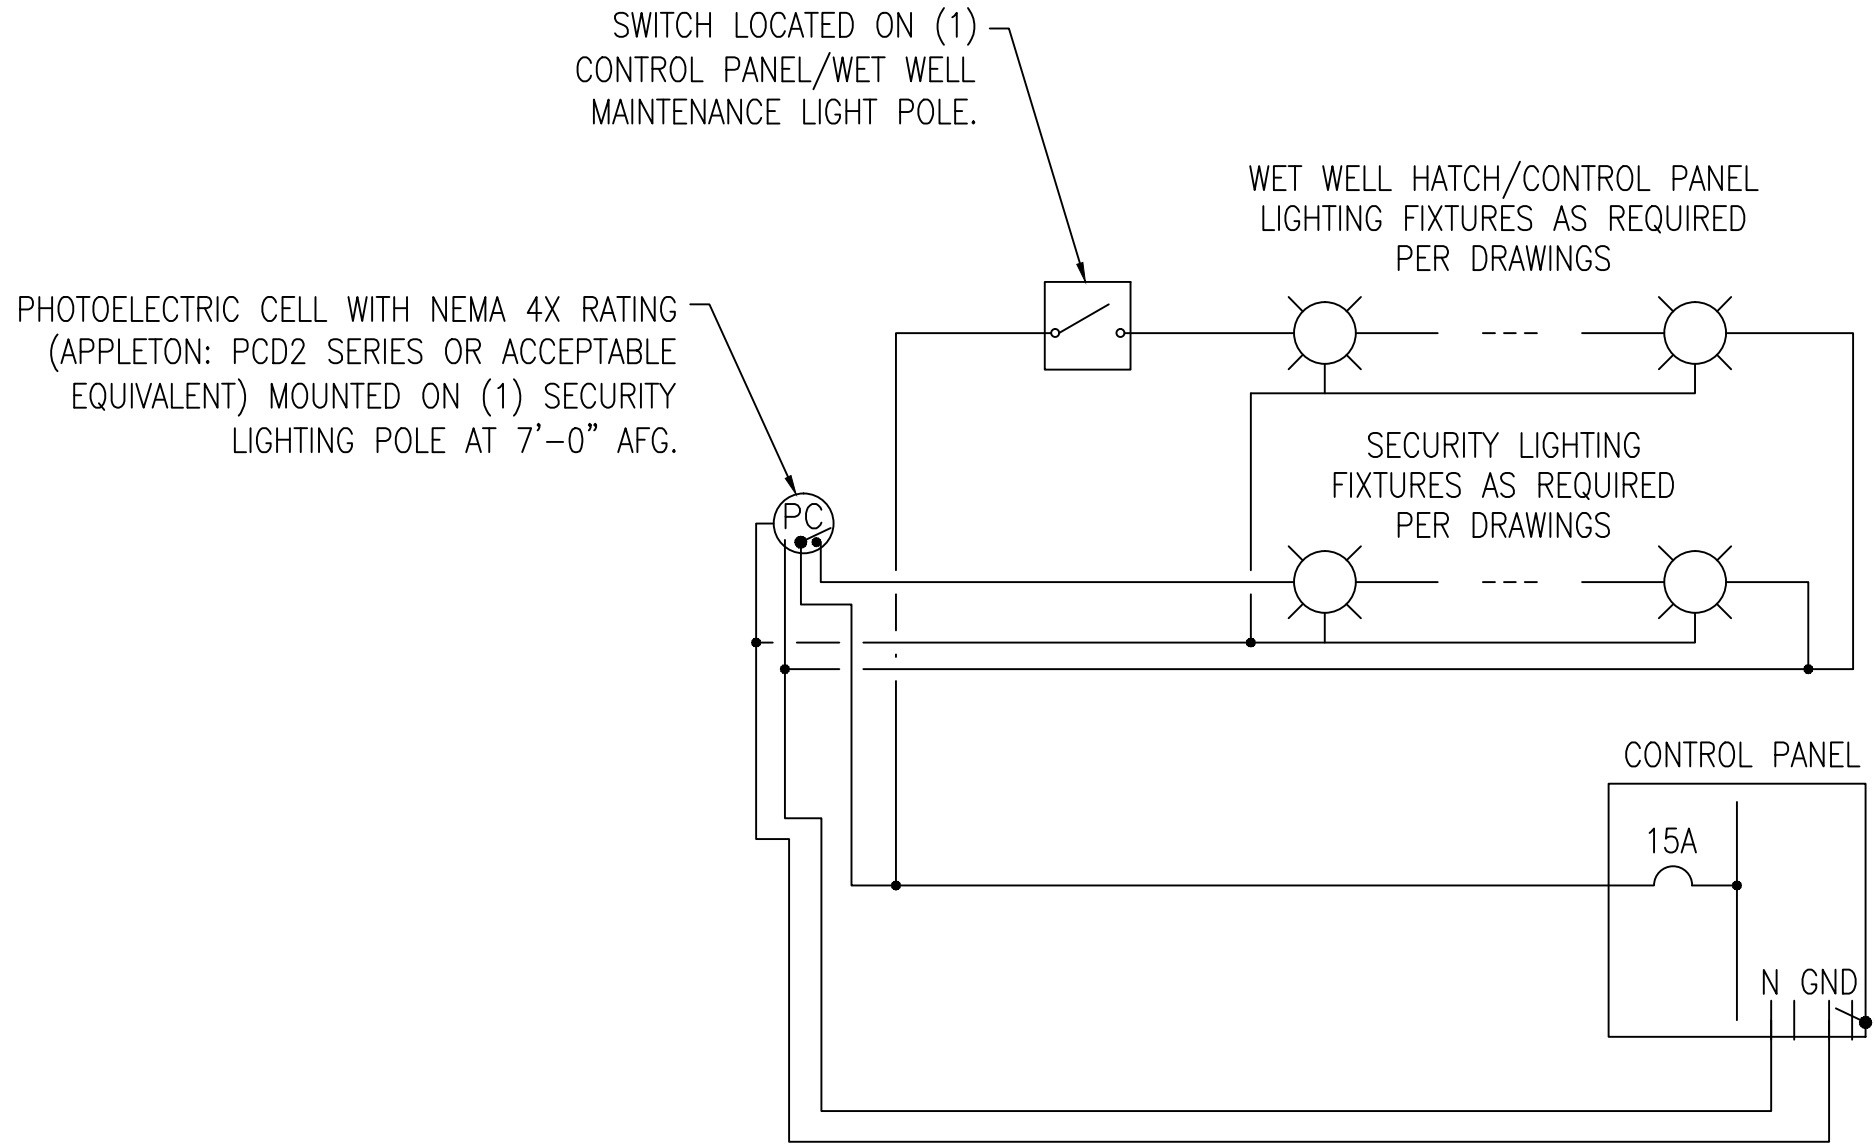

C2 TYPICAL LIGHTING CONTROL DIAGRAM  
NOT TO SCALE

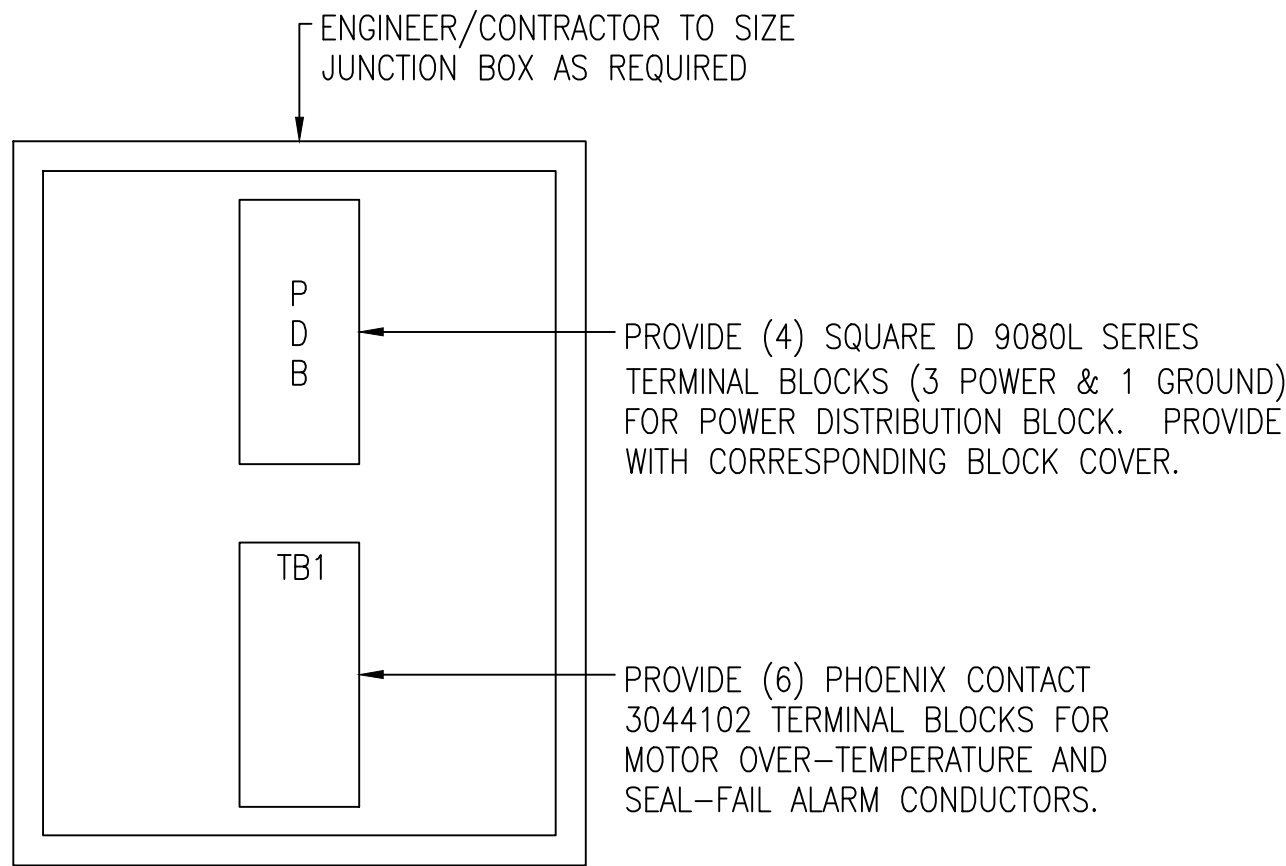


INTERIOR ELEVATION

DETAIL NOTES:

- ALL TERMINAL BLOCKS SHALL BE PROVIDED WITH CORRESPONDING END BRACKETS AND END COVERS.
- PROVIDE SEPARATE GROUND LUG IN EACH JUNCTION BOX, BONDED TO JUNCTION BOX.

A1 TYPICAL PUMP JUNCTION BOX ELEVATION  
NOT TO SCALE

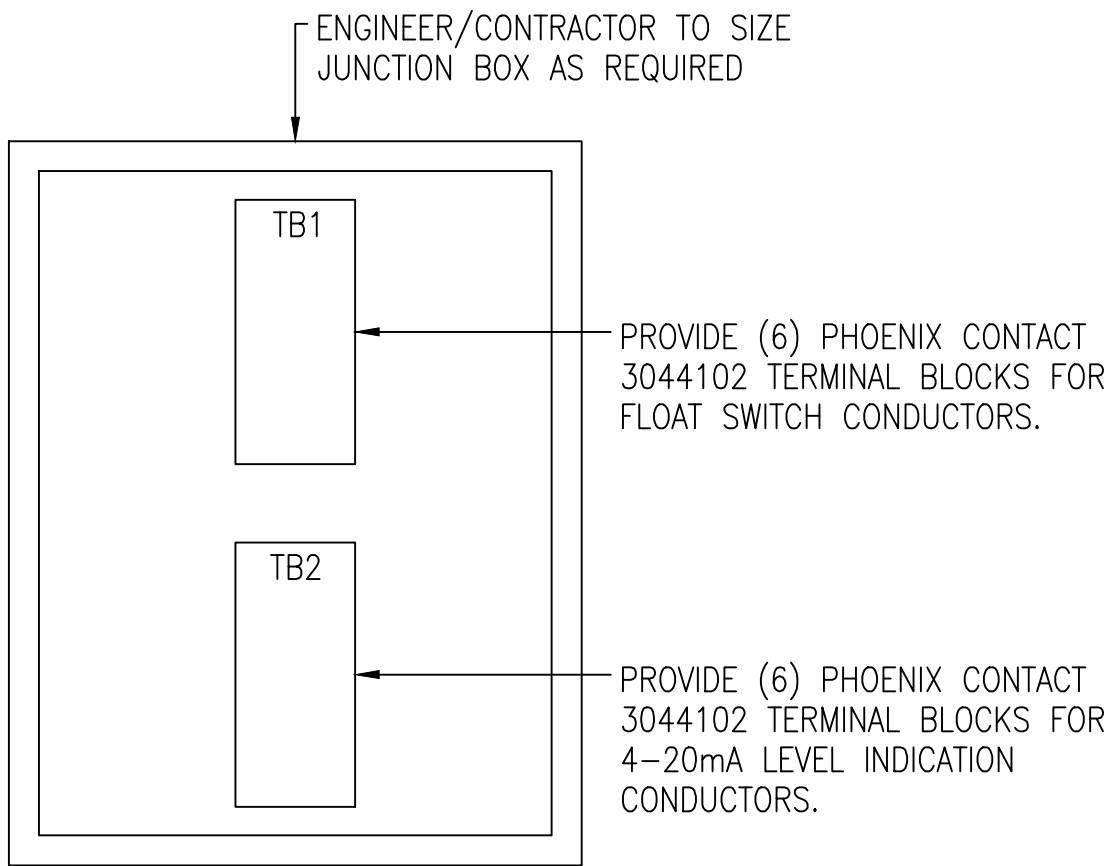


INTERIOR ELEVATION

DETAIL NOTES:

- ALL TERMINAL BLOCKS SHALL BE PROVIDED WITH CORRESPONDING END BRACKETS AND END COVERS.
- PROVIDE SEPARATE GROUND LUG IN EACH JUNCTION BOX, BONDED TO JUNCTION BOX.

A3 TYPICAL LEVEL INDICATION JUNCTION BOX ELEVATION  
NOT TO SCALE

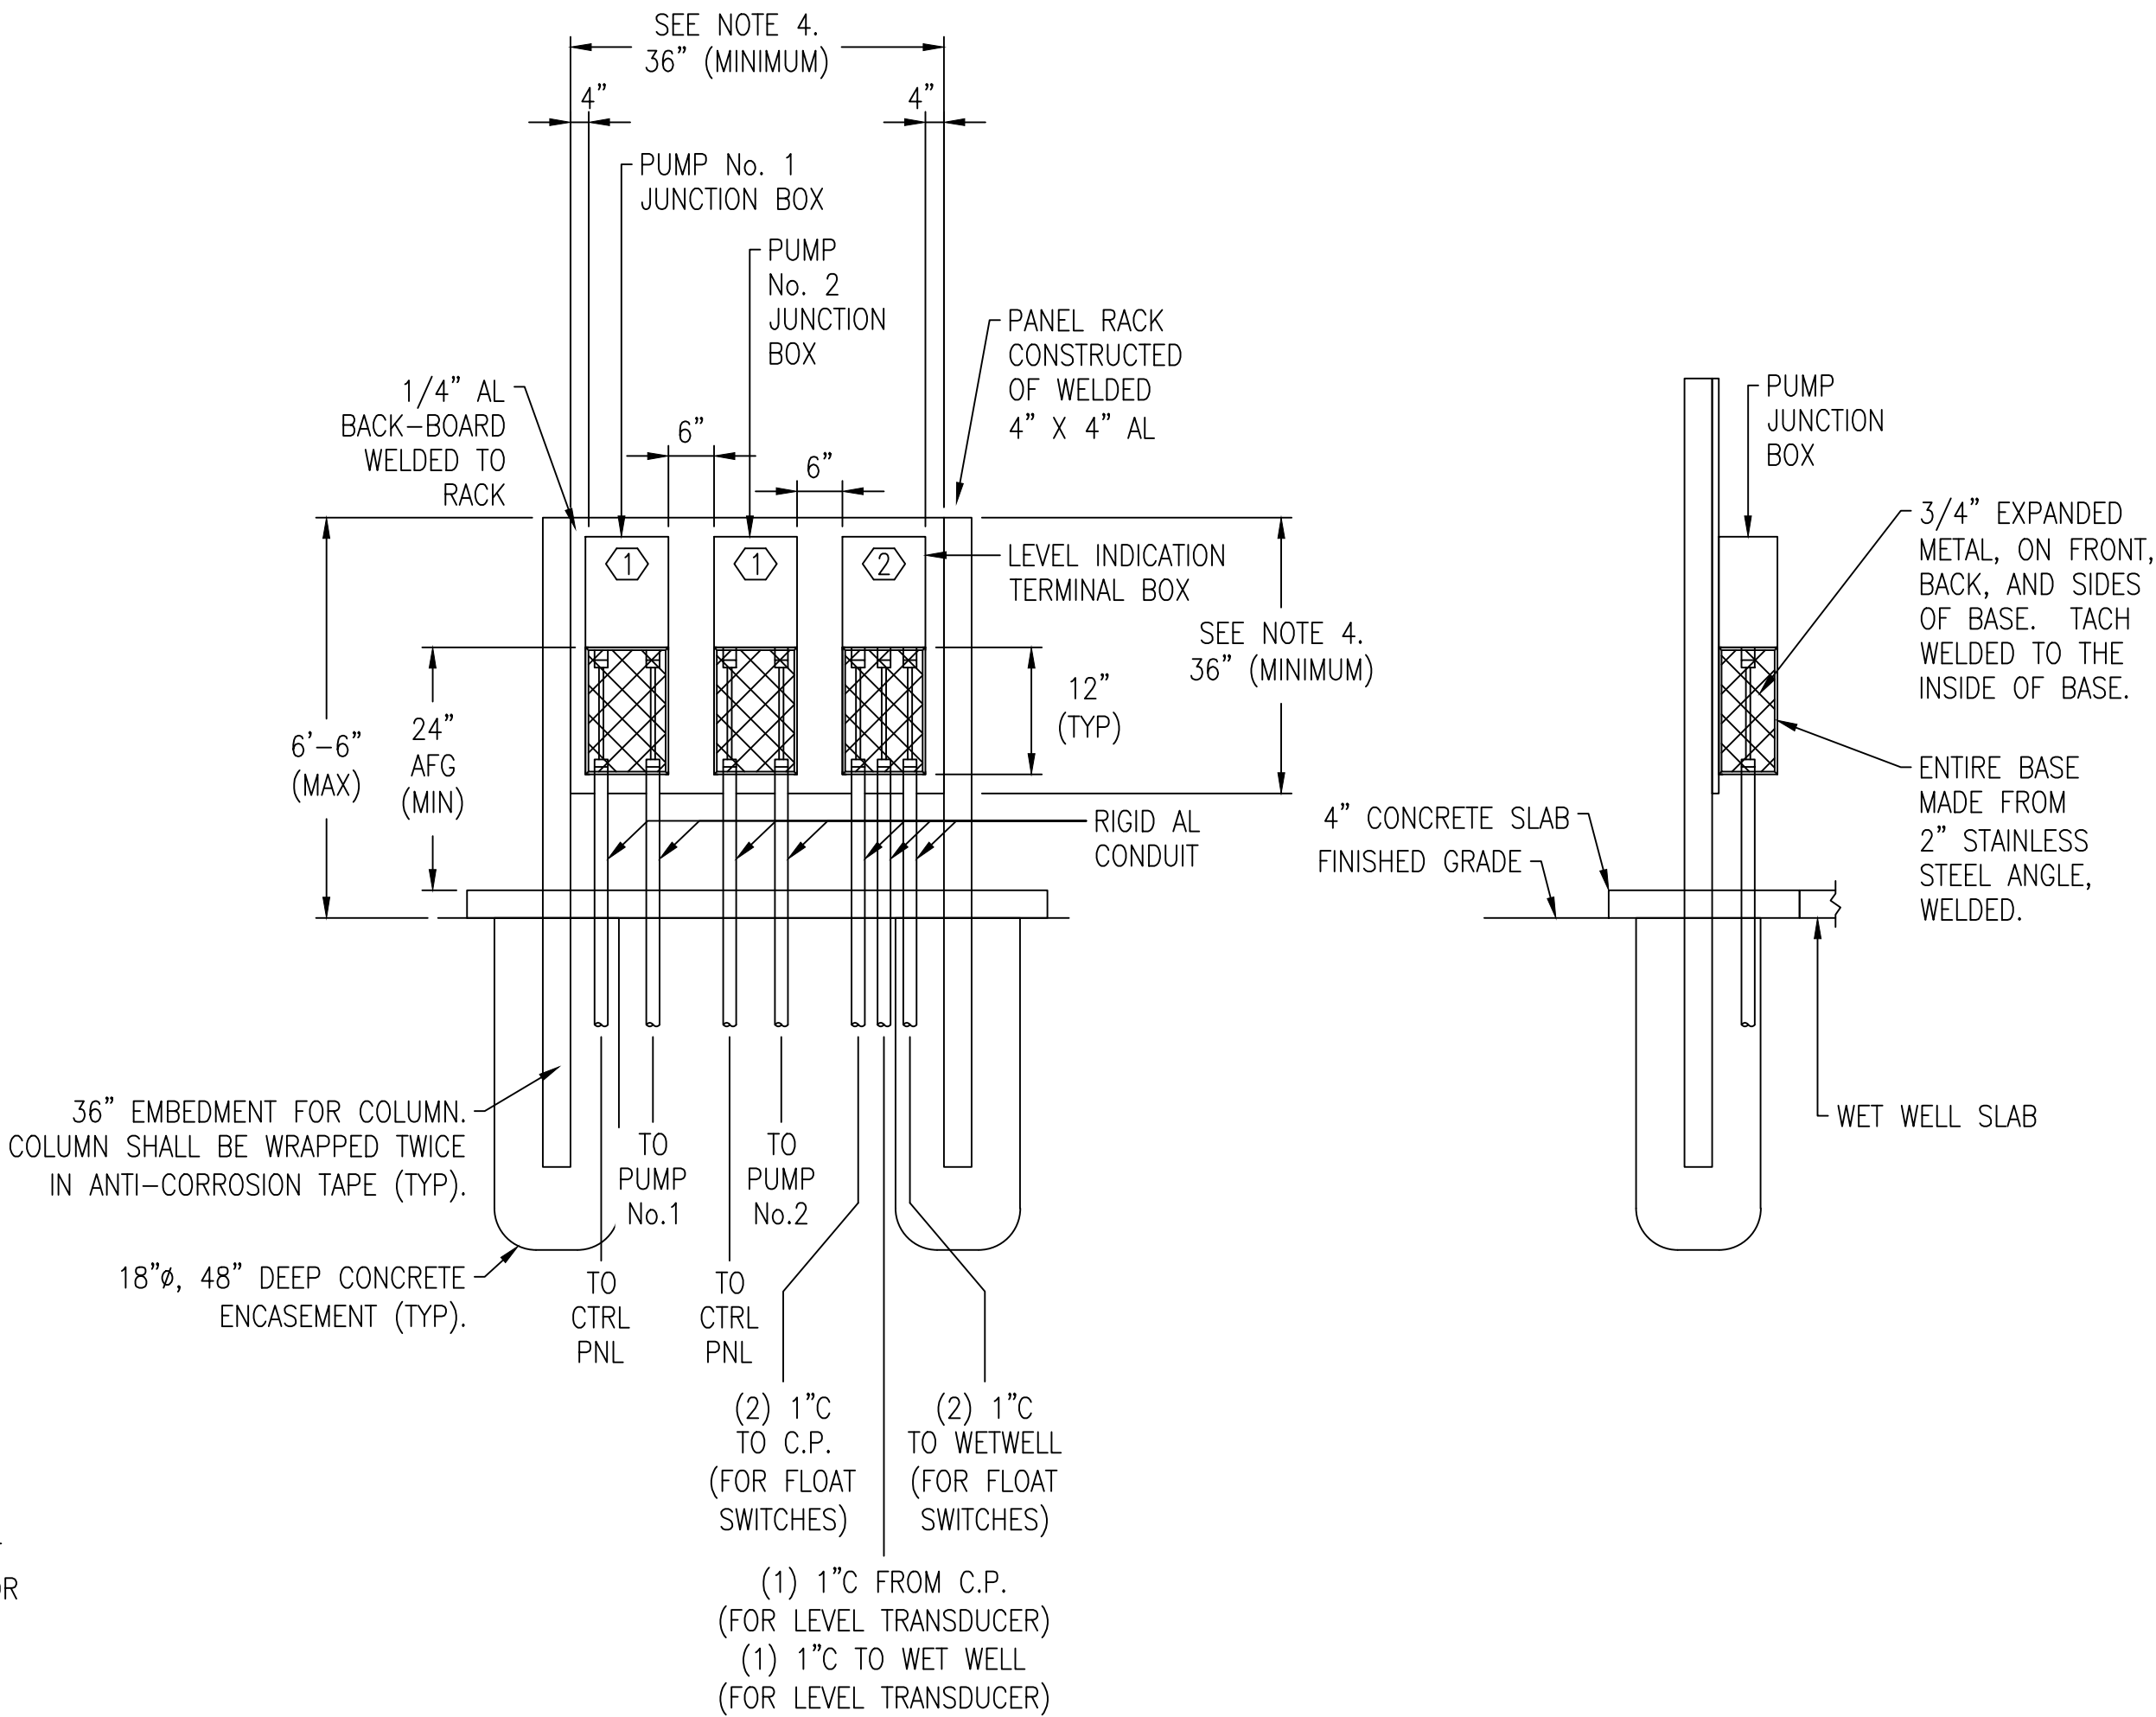

FRONT ELEVATION

SIDE ELEVATION

DETAIL NOTES:

- THIS DETAIL SHALL ONLY APPLY WHEN THE CONTROL PANEL CANNOT BE PLACED WITHIN 10'-0" OF THE WET WELL TO ALLOW FOR CONNECTION OF STANDARD 50 FOOT PUMP CABLE CONNECTIONS.
- BACKBOARD SHALL BE PLACED AT THE EDGE OF THE WET WELL SLAB BETWEEN THE WET WELL AND CONTROL PANEL.
- JUNCTION BOXES SHALL BE MOUNTED SUCH THAT THEY ARE FACING THE WET WELL.
- ENGINEER/CONTRACTOR SHALL SIZE JUNCTION BOXES AND BACKBOARDS BASED UPON INSTALLATION REQUIREMENTS PROVIDED AT TIME OF DESIGN.

KEY NOTES

- ① REFER TO "TYPICAL PUMP JUNCTION BOX ELEVATION" (THIS SHEET) FOR ADDITIONAL REQUIREMENTS.
- ② REFER TO "TYPICAL LEVEL INDICATION JUNCTION BOX ELEVATION" (THIS SHEET) FOR ADDITIONAL REQUIREMENTS.

A4 TYPICAL PUMP JUNCTION BOXES  
NOT TO SCALE