



Recommended P.C. Board Layout
SCALE 8:1

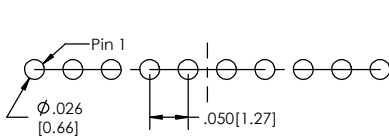


SINGLE ROW

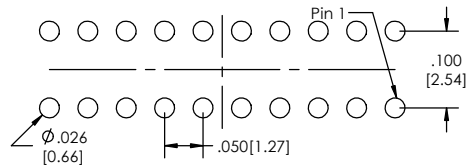


DOUBLE ROW

SINGLE ROW



DOUBLE ROW



LSSH-6 **XX** - **X** - **02** - **XX** - **XXX** - **LF**
(A) (B) (C) (D) (E) (F)

- A. Pins Per Row
- 1 through 40
B. Row Specification
- S= Single Row
- D= Double Row
C. Pin Option
- See Pin Options below
D. Plating Options
- See Plating Options below
E. Polarized Position
- Leave blank if not needed
- If required, specify empty pin position
- e.g. 012 for Pin 12
F. Lead Free

Mates with:
TSHS
TSHC
TSHR
TSHSM
BSTS
BSTC
BSTCM


Plating options	
G	-10µ Gold on Contact Area/ Flash on Tail
T	-Matte Tin all Over
GT	-10µ Gold on Contact Area/ Matte Tin on Tail
H	-30µ Gold on Contact Area/ Matte Tin on Tail
F	-Gold Flash over Entire Pin
FT	-Gold Flash on Contact Area/ Matte Tin on Tail

Pin Style	
Tail	02
.090 [2.30]	


Specifications:
Insertion Depth: .080 [2.03] to .118 [3.00]
Insertion Force- Per Contact- H Plating:
8oz. [2.22N] avg with .018 [0.46] sq. pin
Withdrawal Force- Per Contact- H Plating:
6.0oz. [1.67N] avg. with .018 [0.46] sq. pin
Current Rating: 1.0 Ampere
Insulation Resistance: 1000M Ohms Min.
Dielectric Withstanding: 300V AC
Contact Resistance: 20M Ohms Max.
Operation Temperature: -40°C to +105°C
Max. Process Temperature
Peak: 260°C up to 10 secs.
Process: 230°C up to 60 secs.
Wave: 260°C up to 6 secs.
Manual Solder: 350°C up to 5 secs.

Materials:
Contact Material: Phosphor Bronze
Insulator Material: Nylon 6T
Plating: Au or Sn over 50µ" (1.27) Ni


Tails may be clipped to achieve specific dimensions.
Products cut to specific sizes are uncancellable/ nonreturnable.
Parts are subject to change without notice.






APPLICATION

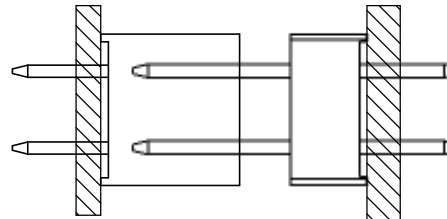

SINGLE ROW



DOUBLE ROW

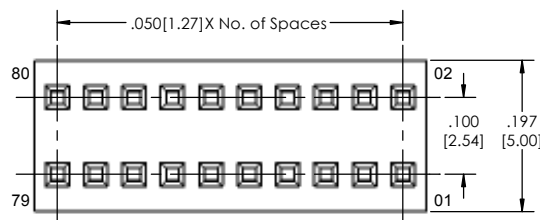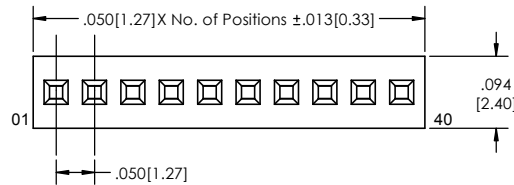

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
Major League Electronics. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
Major League Electronics IS
PROHIBITED.

UNLESS OTHERWISE SPECIFIED:		NAME	DATE
DIMENSIONS ARE IN INCHES		DRAWN	EOW 01/21/15
TOLERANCES:		CHECKED	GWE 01/21/15
ONE DECIMALS ±.100		ENG APPR.	
TWO DECIMAL ±.010		MFG APPR.	
THREE DECIMAL ±.005		ADDRESS:	
FOUR DECIMAL ±.002		2533 Centennial Blvd. Jeffersonville, IN 47130 Phone: 812-670-4174 Fax: 812-670-4175 E-Mail: mle@mlelectronics.com	
NEXT ASSY	USED ON	TITLE: LSSH-6 SERIES	
APPLICATION		DO NOT SCALE DRAWING	
		SIZE	REV
		C	D
		SCALE 8:1	SHEET 1 OF 1

