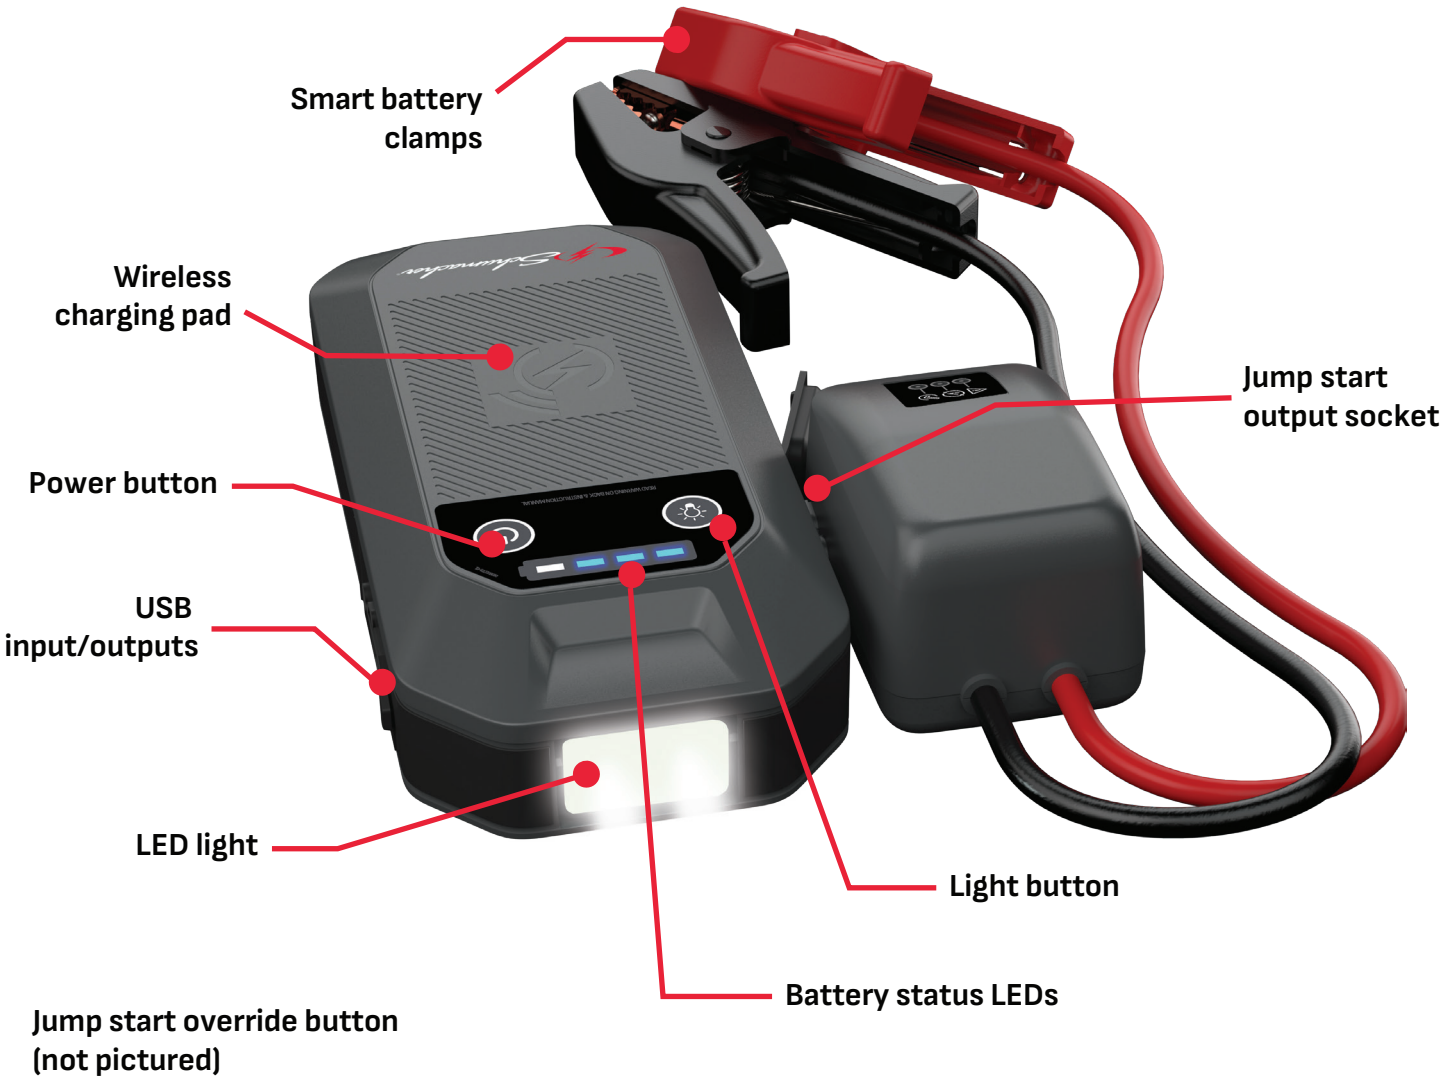


SL1672

1000A 12V Lithium Jump Starter and Portable Power Pack

The Schumacher line of three-in-one lithium portable power packs, jump starters, and LED lights offers superior value and features devices that deliver on the quality that Schumacher has been known for more than 75 years. The Schumacher SL1672 1000A 12V Lithium Jump Starter and Portable Power Pack delivers the power needed to jump start up to 6.0L gas and 3.0L diesel up to 25 times per charge, making it ideal for car, motorcycle, power sport, and lawn equipment batteries. It also boasts advanced features for an exceptional jump starting experience. Pre-Boost technology delivers a breakthrough advantage by safely adding a pre-charge to deeply discharged batteries, while Pre-Heating technology warms batteries in extreme cold, allowing ideal starting conditions. Plus, it has a jump start override feature that allows users to jump start completely discharged batteries.

©2024 SCHUMACHER ELECTRIC CORPORATION | SCHUMACHERELECTRIC.COM

SL1672



What really sets the Schumacher SL1672 apart from the competition is its ability to charge a range of devices via USB-C and USB-A outputs and a 10W wireless charging pad. Forgot your smartphone's charging cable? No problem! The SL1672 has you covered with fast and easy wireless charging.



Specifications	SL1672
Jump Start:	1000 peak amps
Internal Battery Type:	Lithium ion polymer
Battery Capacity:	24 Wh
USB-C Input :	5V DC, 3A | 9V DC, 2A
USB-A Output:	5V DC, 3A | 9V DC, 2A | 12V DC 1.5A
USB-A + USB-C Output:	5V DC | 2.2A + 5V DC | 2.2A
Wireless Charging:	10W max.
Charging Temperature:	32 F to 113 F (0 C to 45 C)
Discharging Temperature:	-4 F to 122 F (-20 C to 50 C)
IP Rating:	IP65 - Water and dust resistant
MAP:	$89.99
MSRP:	$109.99

Features:	
Up to 25 jump starts on a single charge	Jump start override for starting completely discharged batteries
Jump start up to 6.0L gas and 3.0L diesel engines	USB-A and USB-C output ports
Smart battery clamps with quick connect	USB-C input port
Pre-Heating Technology	Three-mode LED work light
Pre-Boost Technology	10W wireless charging pad
Reverse hook-up protection	
Built-in safety: Reverse polarity, short circuit, temperature, battery low voltage, overcurrent, overload, overvoltage, and overcharge protection	
In the box: Schumacher SL1672 1000A 12V Lithium Jump Starter and Portable Power Pack, USB-A to USB-C charging cable,	
smart battery clamps, and user manual	

©2024 SCHUMACHER ELECTRIC CORPORATION | SCHUMACHERELECTRIC.COM