



EROSION CONTROL MATTING NOTES:


- 1. PRIOR TO PLACING EROSION CONTROL MATTING, PREPARE THE SOIL BY RAKING AREA FREE OF CLODS AND LARGE STONES.
- 2. SEED, MULCH AND FERTILIZER SHALL BE DISTRIBUTED AS SPECIFIED OVER THE PREPARED SOIL PRIOR TO PLACING THE EROSION CONTROL MATTING.
- 3. ALL SEAMS SHALL BE OVERLAPPED A MINIMUM OF 12" AND SECURED WITH STAPLES 18" ON CENTER.
- 4. TO SECURE MAT TO GROUND, STAPLE RANDOMLY AT 24" INTERVALS THROUGHOUT, OR AT 12" AT ENDS
- 5. APPROXIMATELY 200 STAPLES PER ROLL
- 6. PLACE EROSION CONTROL MATTING AS DIRECTED BY THE ENGINEER, ON SLOPES GREATER THAN 5:1, AND AS SHOWN ON THESE C4.1 AND W1.1.

EROSION CONTROL MATTING DETAIL SCALE: N.T.S.

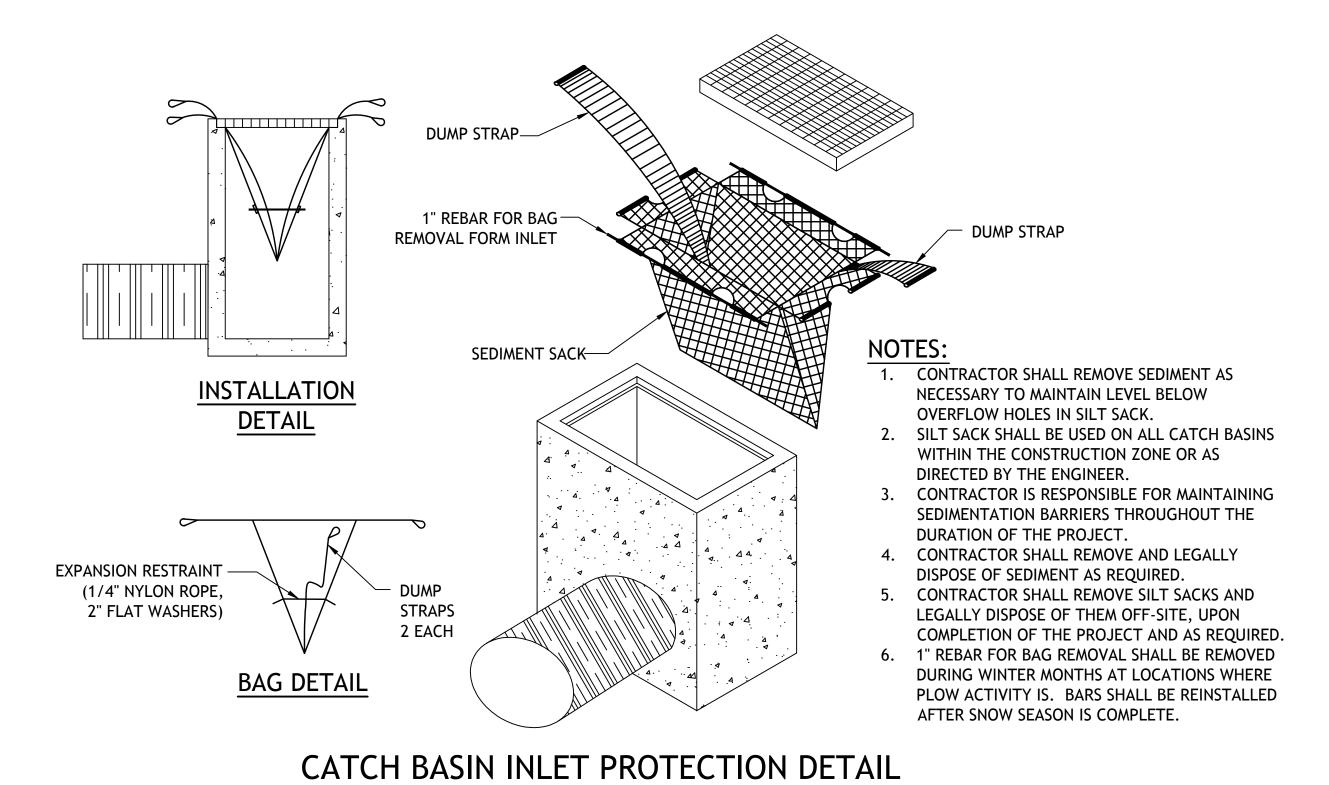

SCALE: N.T.S.



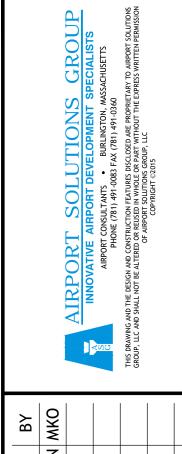

__ 2" x 2" x 24" WOODEN STAKED PLACED 10' O.C.

PLAN

AREA TO BE

PROTECTED

COMPOST FILTER

SOCK (12" TYPICAL)

		4000	THIS DE GROUP	
ВУ	MKO			
DESCRIPTION	12/2016 ADDED PAVEMENT SECTION MKO			
NO. DATE	12/2016			
NO.	_			

COMPOST FILTER SOCK DETAIL SCALE: N.T.S.

WATER FLOW

WORK AREA

— 2" x 2" x 24" WOODEN STAKES PLACED 10' O.C.

(12" TYPICAL)

W W W W W W

- COMPOST FILTER SOCK

AREA TO BE PROTECTED


BLOWN/PLACED -

FILTER MEDIA


WORK AREA

12" MIN.

SECTION

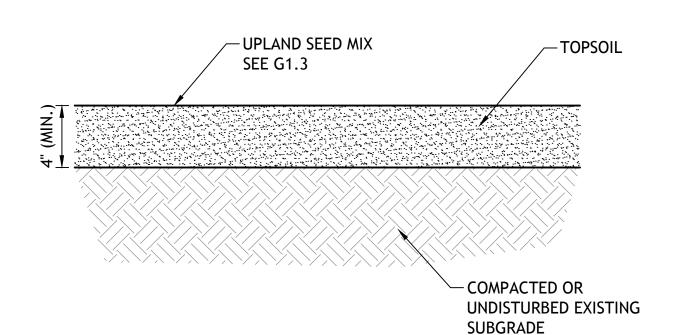

TOPSOIL AND SEED DETAIL SCALE: N.T.S.

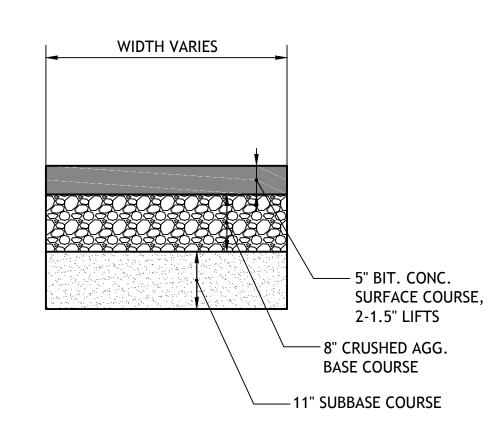

APRON TYPICAL SECTION SCALE: N.T.S.

C2.1

6 OF 8

DRAINAGE DETAILS (1 OF 2)