

Igor® PoE Emergency Network Node – Min

Model: NP50-60-W-N-N-EM

Igor Network and Device Nodes provide the data connectivity and power distribution architecture to create a fully functioning PoE lighting control system. The Igor Gateway software communicates bi-directionally with the nodes to control lighting for each space, as well as to receive signals from sensors and other devices to improve occupant comfort and optimize energy savings.

Emergency Network Nodes

Igor emergency network nodes (*-EM) are a key component to installing a Power over Ethernet emergency lighting system. These nodes are UL 924-FTBR listed for use as emergency LED drivers. When combined with a central emergency power source such as a generator, inverter or UPS,* they provide a fully code compliant emergency lighting solution. During normal operation, these nodes offer full range dimming and control of the LED fixtures and automatically switch into emergency lighting mode when normal building power is lost.

In addition to the emergency lighting functionality, Igor Network Nodes also act as an intelligent hub for the PoE lighting network. They receive power and data from the PoE network switch, interact with connected devices and pass power and data downstream to any daisy-chained Device Nodes via the Igor Bus. As LED fixtures and sensors are connected and configured, the node will automatically report those devices back to the Igor Gateway software for easy plug and play functionality. Each Network Node is also DHCP-enabled and will automatically receive an IP address from the local network to simplify installation and setup.

* - Emergency power source equipment must be UL 924 listed and adequately sized to provide minimum 90-minute runtime based on lighting load.



Product Specifications

Specifications subject to change without notice.

Item	Model: NP50-60-W-N-N-EM	Igor PoE Emergency Network Node—Min
Electrical	PoE PD Interface	IEEE 802.3at-2009 PD Type 2, Class 4 compliant Input with LLDP extensions for negotiating power above 30W using four (4) pairs
	Input Voltage	48-57VDC
	Peak Operating Power	60W max
	Nominal Standby Power	2.0W
	PoE Input Connection	Unshielded female RJ45 jack for use with CAT5e/6 cable to PSE device
	Igor Bus Connection	Unshielded female RJ45 jacks for use with CAT5e/6 cable to Igor Device Node
	Node Power Monitoring	Node energy data is automatically sampled every minute and stored in the Igor Cloud Portal. Accuracy: $\pm 3\%$
	Device Type	Class 2 electrical device
LED Driver Outputs	Output Channel	Single LED driver channel
	Driver Design	Constant current LED driver design, programmable in 10mA increments from 100mA to 1750mA. (Also see the " Operating Window " figure, page 4.)
	Dimming	Full Range dimming control from 1% to 100% in increments as fine as 0.01%. Multiple dimming modes, including Analog CCR (constant current reduction), PWM, and Hybrid (CCR and PWM) mode.
	Output Voltage Range	12-48VDC
	Rated Output Power	53W max
	Protection	Short circuit and open circuit protection
	Connections	Screw terminals, accept 14-26 AWG conductors. Tightening torque: 2.0-3.5 in-lbs. (0.35-0.4 Nm) Luminaire LED engine circuits MUST be isolated; MUST NOT have an electrical path to Ground or to the luminaire housing. Common anode and common cathode circuit designs are not supported by this node model's LED drivers.
Environment	For indoor use only	
	IP Rating	IP20
	Sound Rating	<24dB Class A

Item	Model: NP50-60-W-N-N-EM	Igor PoE Emergency Network Node—Min
Environment (Cont.)	Maximum Case Temp.	85°C
	Operating Temperature	0°C to 70°C
	Operating Humidity	10% to 80% RH non-condensing
	Storage Temperature	-20°C to 85°C
	Storage Humidity	5% to 95% RH non-condensing
Safety & EMC	Safety Standards	UL 2108, CAN/CSA C22.2 No. 9 UL 1598C, CAN/CSA C22.2 No. 250.0-08, CSA B-79A UL 2043, Suitable for Use in Air Handling Spaces (Plenum Rated) UL 924, CAN/CSA C.22.2 No. 141-15 - Emergency Lighting
	Flicker	Compliance with IEEE 1789-2015 Recommended Practices for Modulating Current in High-Brightness LEDs for Mitigating Health Risks to Viewers. (Also see the " Flicker-Free LED Lighting Control " description, page 4.
	EMC Emissions	Compliance to EN 55015:2013
	EMC Immunity	Compliance to EN 61547:2009
	FCC	Compliance to Title 47 Part 15 Subpart B Section 15.109
	EU	RoHS Compliant
Other	Dimensions - Overall	4.54" (90mm) L x 2.87" (73mm) W x 1.10" (28mm) H
	Dimensions - Mounting Tabs Removed	3.54" (90mm) L x 2.87" (73mm) W x 1.10" (28mm) H View Rev. 5.0 Node Dimensions , page 6.
	Rated Lifetime	50,000+ hours
	Origin	Made in USA

Flicker-Free LED Lighting Control

IEEE 1789-2015 contains the IEEE Recommended Practices for Modulating Current in High-Brightness LEDs for Mitigating Health Risks to Viewers and essentially sets the standard for flicker-free lighting. Flicker can be caused by PWM dimming of the light source, including LEDs. Igor PoE Node LED drivers can be programmed for multiple dimming modes, including PWM dimming. Igor drivers implement their PWM dimming mode at a frequency of 1250Hz, which is within the IEEE 1789-2015 standard's "Recommended Operating Area."

Other Igor driver dimming modes include Analog CCR (Constant Current Reduction) dimming, which doesn't cause any flicker of the light source; and Hybrid dimming mode, which utilizes both Analog CCR and PWM dimming. In Hybrid mode, Analog CCR dimming is used at dimming levels >10% and PWM is used at levels <10% to offer very precise low level lighting control and smooth fade on/fade off functionality.

Operating Window

Figure 1 below shows the recommended output voltage and current ranges for the Igor Network and Device Nodes based on the specified node ambient temperatures. Driver performance cannot be guaranteed outside the operating window.

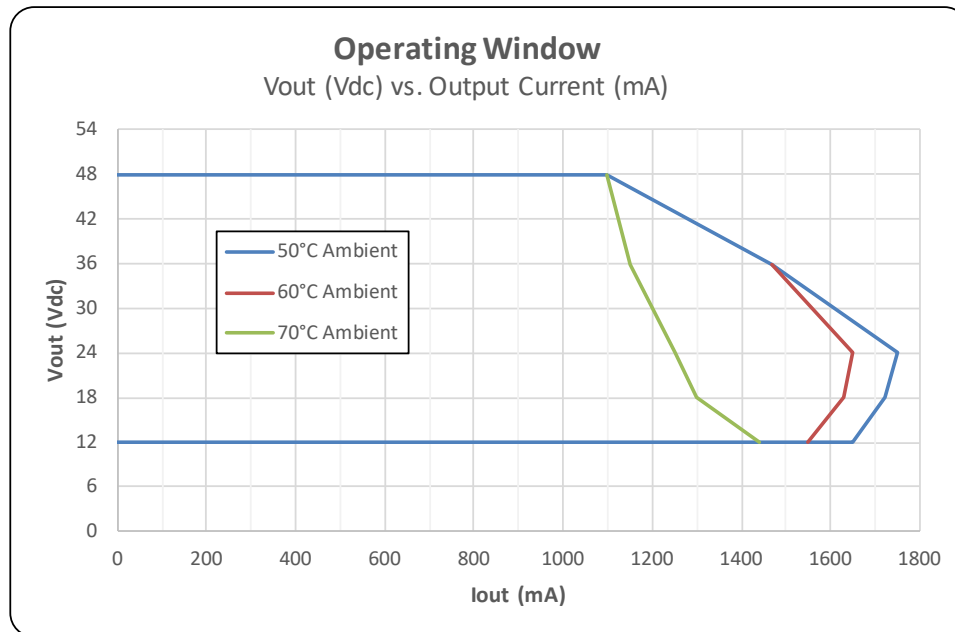


Figure 1

Typical Driver Efficiency vs. Load Level

Figure 2 below shows typical driver efficiency values for the full range of supported load voltages.

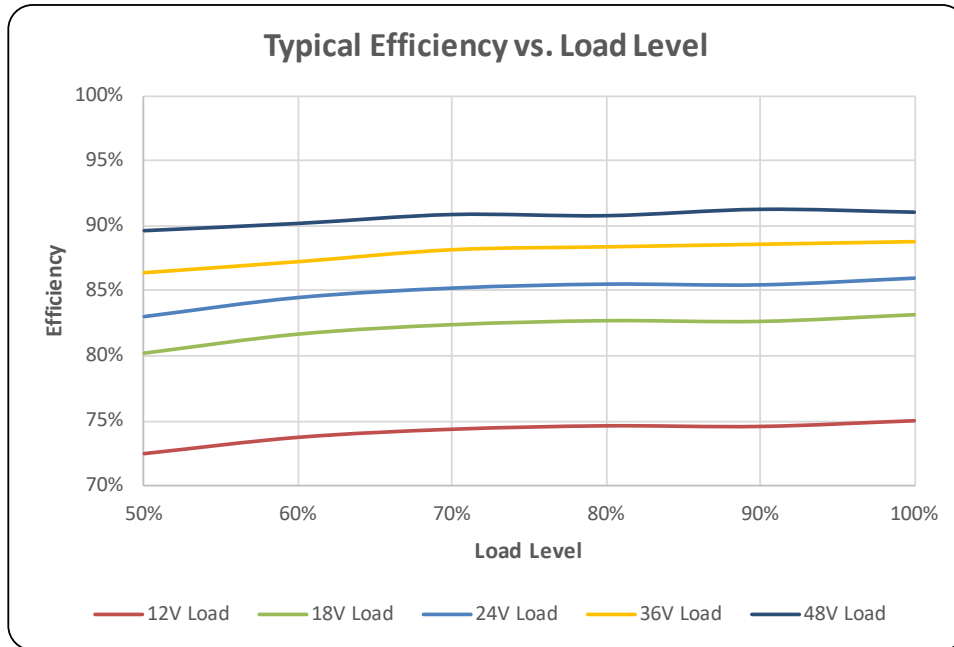


Figure 2

Output Current vs. Load Voltage

Figure 3 below shows the maximum recommended output current settings based on load voltage and ambient temperature.

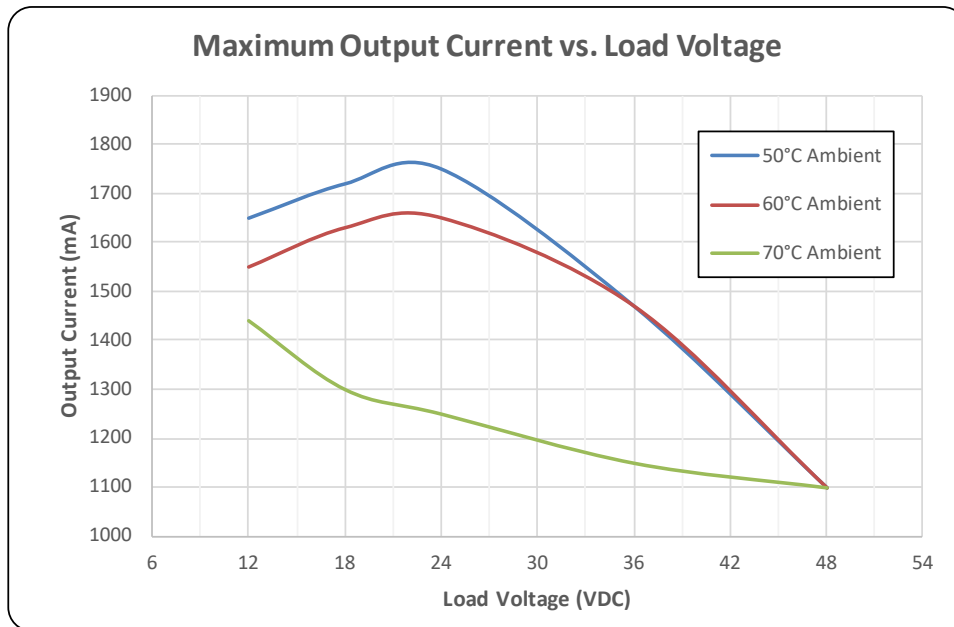


Figure 3

Output Power vs. Load Voltage

Figure 4 below shows the maximum recommended output power levels based on load voltage and ambient temperature.


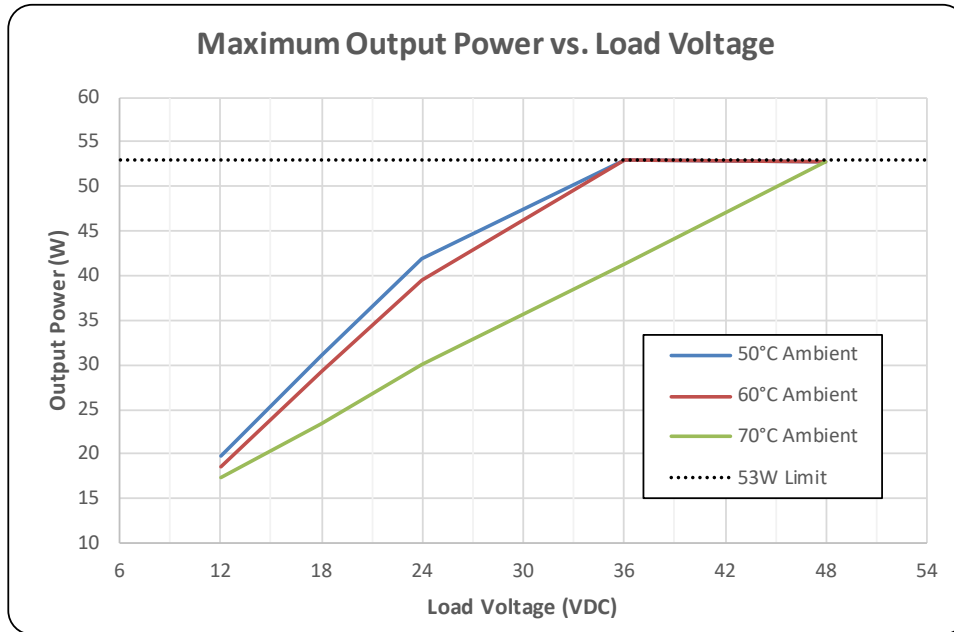


Figure 4

Rev. 5.0 Node Dimensions

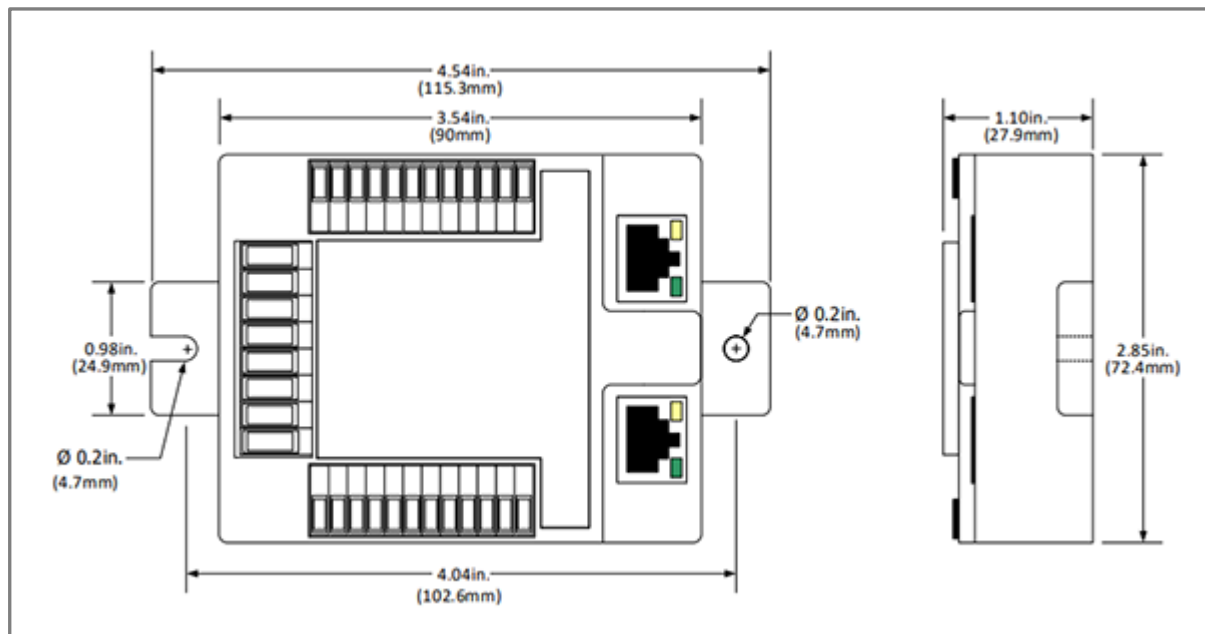

Remote Mounting

Applications that call for remote mounting of the Igor Nodes separate from the LED fixture are acceptable. Please follow the maximum wiring distances listed in Table A below when selecting an appropriate wire gauge.

		AWG Wire Size						
		12	14	16	18	20	22	
Output Current (mA)	350	900	566	356	224	141	89	Max Cable Length (ft)
	500	630	396	249	157	99	62	
	700	450	283	178	112	70	44	
	1000	315	198	125	78	49	31	
	1100	286	180	113	71	45	28	
	1400	225	141	89	56	35	22	
	1750	180	113	71	45	28	18	

Table A. Max cable length (ft.) between node and LED fixture (based on 1V drop)

END.