


## Setting Up a Remote MiVoice Connect Handset IP480

If the phone has already booted and you see a screen that says Available or a user's name, you'll need to clear the configuration and reboot the phone. If you're booting the phone for the first time, skip to **Step 3**.


1. With the handpiece down, press the mute button and then spell the word CLEAR using the keypad, followed by has. Keypad presses are **MUTE 25327#**
2. On the next screen, press the **Clear soft key** to clear the configuration and reboot the handset.

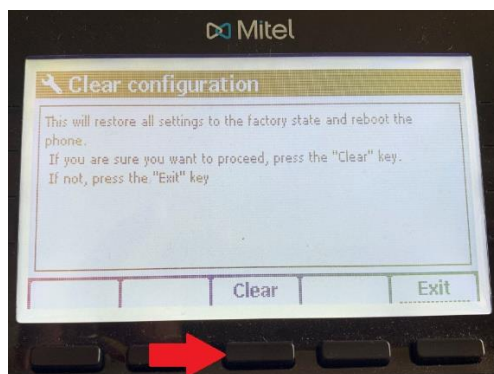


3. The handset will now reboot. Keep an eye on the screen. During the boot process it will prompt to enter the setup menu. Press any key to stop the boot process.




- You'll be prompted to enter the admin password. Use the dial pad to enter the password **1234#**

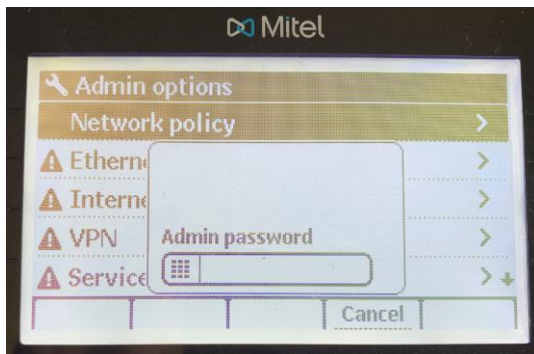

- Use the arrow keys to scroll through the setup menu to VPN and press the **Open soft key** to select.

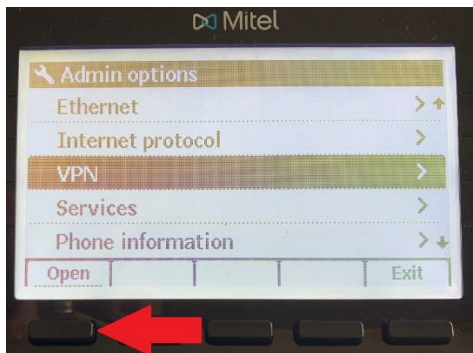


- With Use VPN highlighted, press the **Toggle soft key** to toggle the setting to On.

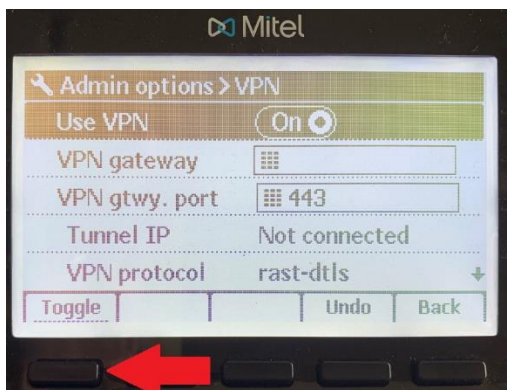


- Use the **Down Arrow key** to scroll down to VPN gateway. Using the dial pad, enter the IP address of your Edge Gateway device. Use \* for dots and **Backsp soft key** to backspace.



- Use the **Down Arrow key** to scroll down to VPN gtwy. Port. Using the dial pad, enter the required port number if different from the default 443. Use **Backsp soft key** to backspace.

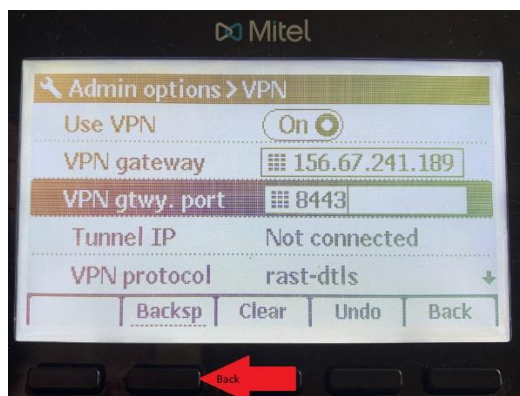

- Press the **Back soft key**. All of your changes will be saved.

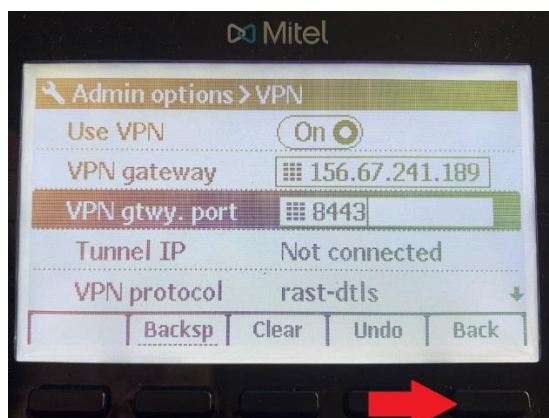

10. Press the **Apply** sort key. This will apply your changes and cause the handset to finish booting.

