

High Strength Clinch Studs - Non Flush

Einpress-Gewindebolzen für höhere
Belastbarkeit (KOPF ÜBERSTEHEND)

Goujons à sertir
Haute résistance (Non Affleurants)



Product Range | Produktreihe | La gamme de produits


Zinc & Clear (CR3) | Stahl Verzinkt (CR3) | Acier Zingué (CR3)

LENGTH (L) mm	15	16	20	25	30	35	40	45	50
M8		■	■	■	■	■			
M10	■		■	■	■	■	■	■	■

■ - Generally available Ex-Stock.
- Überwiegend ab Lager erhältlich.
- Généralement disponible en stock.

■ - Non preferred sizes. Minimum order quantity of 5,000 pieces.
- Nicht präferierte Abmessungen. Mindestbestellmenge von 5,000 Stück.
- Dimensions non-préférées. Quantité de commande minimum de 5,000 pièces.

Technical Data | Technische Informationen | Informations Techniques

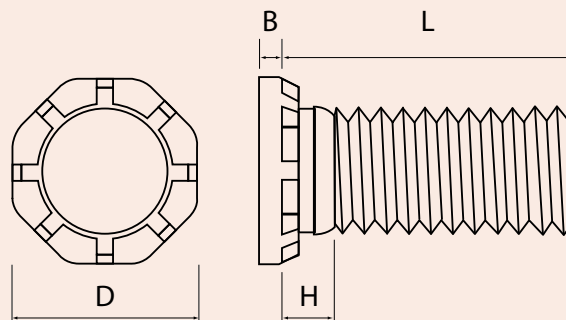

Thread size	M8	M10
D ± 0.4	12.5	15.7
H max	3.5	4.1
B max	1.78	2.30
Min rec sheet thickness	2	2.4
Hole + 0.13 - 0.0	8	10
Min distance to edge of sheet	12.7	13.7

To suit 85 HRB or below
Geeignet für Blechhärten bis HRB 85
Pour tôles de dureté maximum 85 HRB

Lancaster Fastener Co Ltd

Middlegate, White Lund Industrial Estate, Morecambe, England, LA3 3BN

Tel +44 (0) 1524 62645, Fax +44 (0) 1524 66367, enquiries@lancasterfastener.co.uk, www.lancasterfastener.co.uk

