

WARNING

**** WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN ****

- * Switch off the main electrical supply from the main fuse box / circuit breaker before installation.
- * Inspect item carefully before attempting to install.
- * If there is any damages or obvious defects, do not install.
- * Item may not be returned once it has been installed.

















CARE AND MAINTENANCE

- * To clean the outside of the fixture, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the surface of the fixture.
- * To clean the inside of the fixture, first disconnect power to the fixture by turning off the circuit breaker or by removing the fuse at the fuse box. Next, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the interior surface of the fixture.
- * Do not use any cleaners with chemical, solvents or harsh abrasives. Use only a dry soft cloth to dust or wipe carefully.

NOTICE& IMPORTANT SAFETY INSTRUCTIONS

- * Please make sure that you have all parts indicated before you begin assembly of this item
 - * This item should be assembled on a soft surface to prevent scratching the finish during assembly
 - * To reduce the risk of fire, electrical shock or injury to persons or property, please follow the guideline below for safe use and installation
 - *The external flexible cable or cord of this lamp cannot be replaced
- If the cord is damaged, the lamp shall be destroyed


Part List and Hardware List

A	Wire Nut	X 3		J	Closable link	X 2	
B	Crossbar	X 1		K	Chain	X 1	
C	Outlet Box Screw Size:8/32*30mm	X 2		L	Canopy Nut	X 1	
D	Green Ground Screw	X 1		M	Stem	X 1	
E	Hex Nut	X 2		N	Fixture Loop	X 1	
F	Nipple	X 1		O	Bulb Shield	X 12	
G	Fixture Body	X 1		P	Tube	X 12	
H	Canopy	X 1		Q	G9 Bulb	X 12	
I	Hanging Loop	X 1					

 **SAFAVIEH**
LIGHTING

Model#: CHA4005A


Product Dimensions: Ø22" X17"H

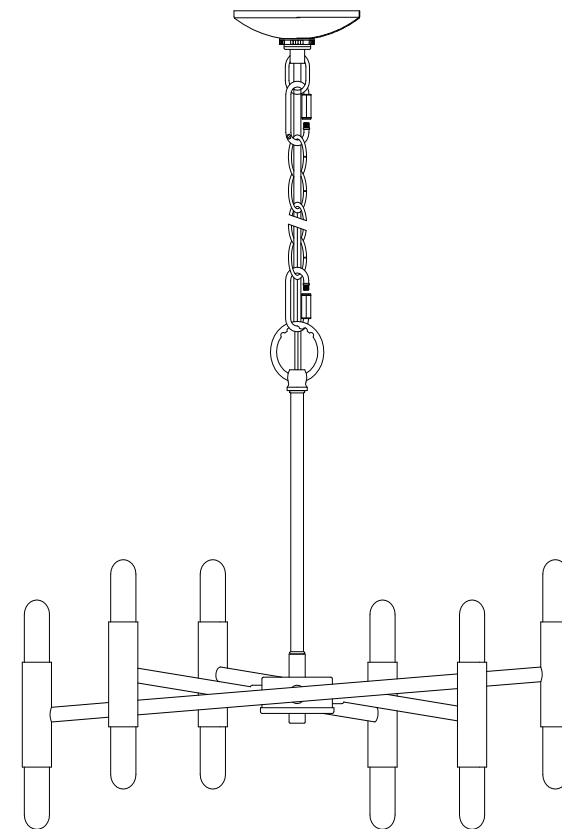


PREPARATION

- * Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list.
- * If any part is missing or damaged, do not attempt to assemble the product.
- * Estimated Assembly Time:30 minutes
- * If you are having difficulty, our friendly Customer Care team is always here to help. Please email customersupport@safavieh.com



NOTE: PLEASE USE TYPE G9 LED BULB MAX. 5-WATT.THERE ARE 12*2-WATT G9 LED BULBS IN THE BOX.

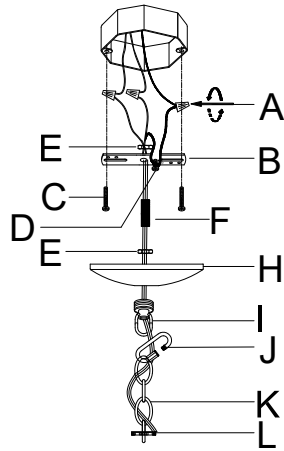

Step 1: Unpack all parts from carton carefully.Place the Canopy (H) onto the Hanging Loop (I)Screw the Nipple (F) into the threaded portion of the Hanging Loop (I) and fix it by turning the Canopy Nut (F) clockwise till tight.Attach the Closable Link (J) onto the Hanging Loop (I).

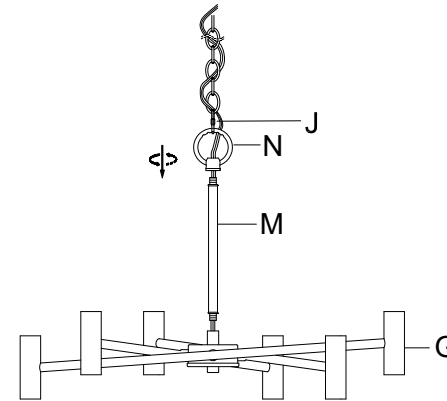

Step 2: Thread the Stem (M) to top of the Fixture Body (Q),and then thread the Fixture Loop (N) to the Stem(M).Attach the Closable Link (J) onto the Fixture Loop(N).

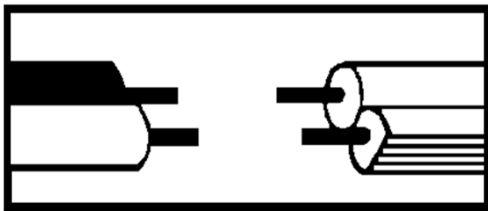


Step 3: Wire connection


Connect fixture neutral wire (ribbed) to the outlet box neutral wire (usually white) using a wire nut.
Connect fixture hot wire (smooth with markings) to the outlet box hot wire (usually black) using a wire nut.
CAUTION: Do not reverse the hot and neutral connections

Grounding Instructions:

Wrap ground wire from outlet box around green ground screw(B) on mounting bracket, no less than 2" from wire end. Tighten ground screw. If fixture is supplied with a ground wire, connect to outlet ground wire with a wire connector.

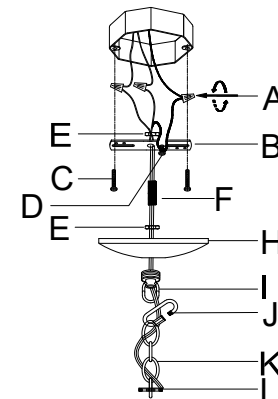

Step 4:Separate the Crossbar (B) from the Canopy (H) by unscrewing the Canopy Nut (L).

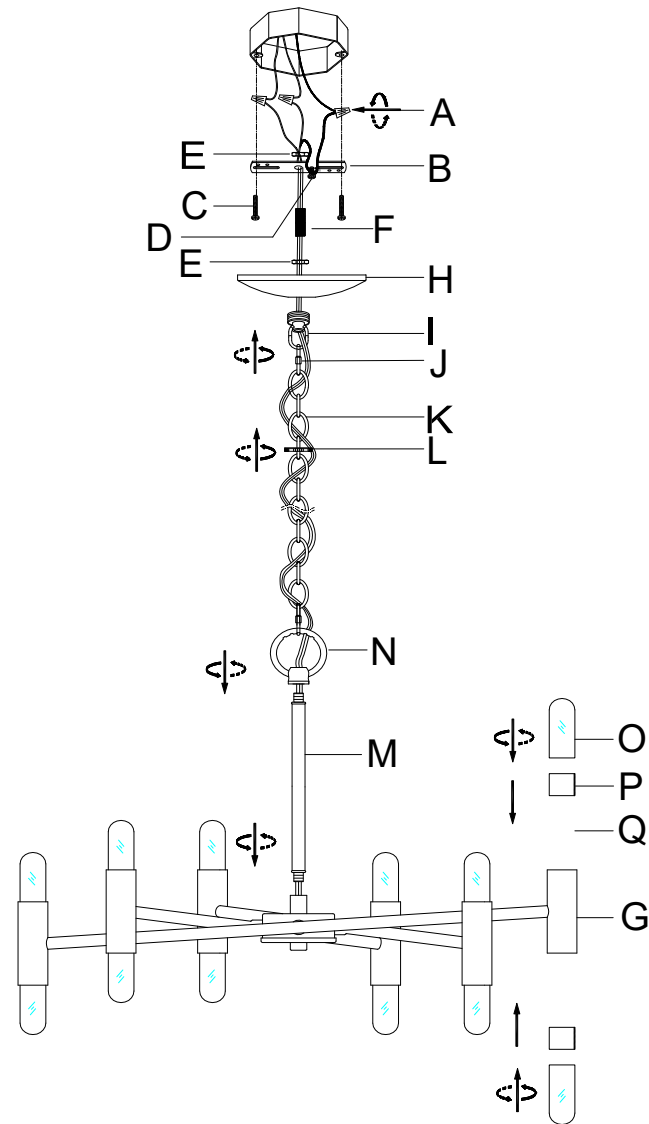

Step 5: Install the Crossbar (B) to the junction box with Outlet Box Screws (C). Attach the Canopy (H) to the junction box and fix it by turning the Canopy Nut (L) clockwise. Slide the Tubes (P) over the sockets, Insert the G9 bulbs(Q) into the sockets, and then thread the Bulb Shields(O) to the Fixture Body (R) as shown.