

WARNING

- * Switch off the main electrical supply from the main fuse box / circuit breaker before installation.
- * Inspect item carefully before attempting to install.
- * If there is any damages or obvious defects, do not install.
- * Item may not be returned once it has been installed.





















CARE AND MAINTENANCE

- * To clean the outside of the fixture, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the surface of the fixture.
- * To clean the inside of the fixture, first disconnect power to the fixture by turning off the circuit breaker or by removing the fuse at the fuse box. Next, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the interior surface of the fixture.
- * Do not use any cleaners with chemical, solvents or harsh abrasives. Use only a dry soft cloth to dust or wipe carefully.

NOTICE& IMPORTANT SAFETY INSTRUCTIONS

- ** WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN **
- * Please make sure that you have all parts indicated before you begin assembly of this item
- * This item should be assembled on a soft surface to prevent scratching the finish during assembly
- * To reduce the risk of fire, electrical shock or injury to persons or property, please follow the guideline below for safe use and installation


Part List and Hardware List

| PIECE | DESCRIPTION | PICTURE | QUANTITY | PIECE | DESCRIPTION | PICTURE | QUANTITY |
|-------|----------------|---|----------|-------|---------------------|---|----------|
| A | Wire Connector |  | 3X | K | Center Rod |  | 2X |
| B | Mounting Plate |  | 1X | L | Glass |  | 5X |
| C | Ground Screw |  | 1X | M | Screw |  | 19X |
| D | Mounting Screw |  | 2X | N | Bulb |  | 5X |
| E | Canopy |  | 1X | O | Square Tube Pillars |  | 4X |
| F | Canopy Nut |  | 2X | P | Socket Assembly |  | 1X |
| G | Short Stem |  | 4X | Q | Bottom Frame |  | 1X |
| H | Long Stem |  | 4X | R | Cap |  | 2X |
| I | Hex Nut |  | 2X | S | Allen Wrench |  | 1X |
| J | Top Frame |  | 1X | T | Screwdriver |  | 1X |



Model#: CHA4052


Product Dimensions: 38"L x 10"W x 23.25"-53.25"H

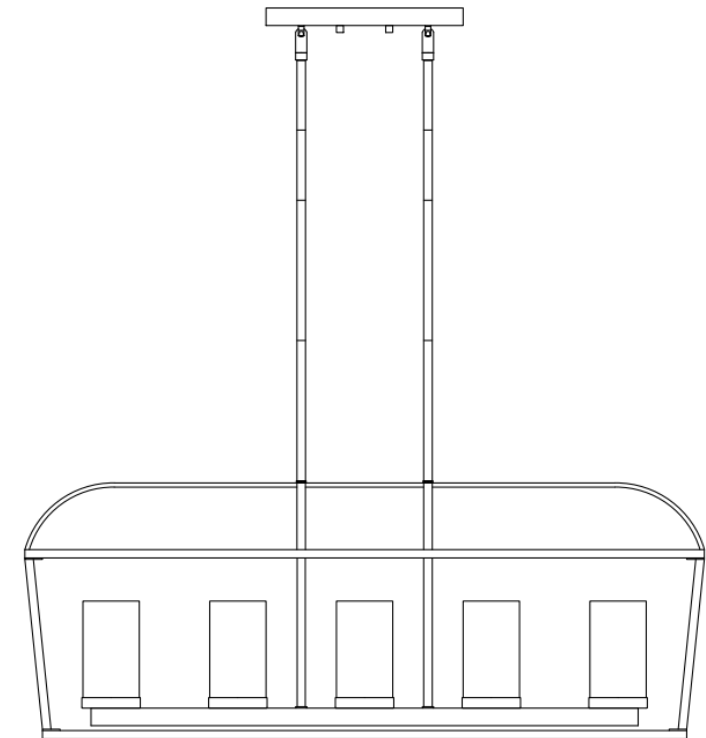


PREPARATION

- * Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list.
- * If any part is missing or damaged, do not attempt to assemble the product.
- * Estimated Assembly Time: 20 minutes.
- * If you are having difficulty, our friendly Customer Care team is always here to help. Please email customersupport@safavieh.com

NOTE: PLEASE USE TYPE "B" BULB MAX 40-WATT OR LED BULB MAX 9-WATT, THERE ARE 5PCS LED 4-WATT BULB IN THE BOX

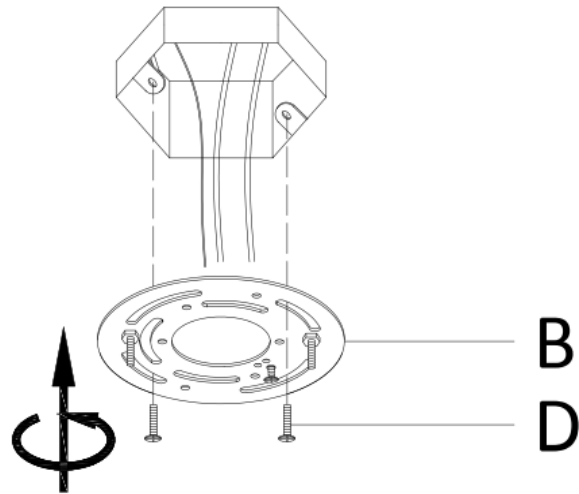


Step 1: Unpack all parts from cartons carefully. Separate the Mounting Plate (B) from the Canopy (E) by removing the Canopy Nut (F) anti-clockwise. Fix the Mounting Plate(B) to the junction box with Mounting Screw (D).

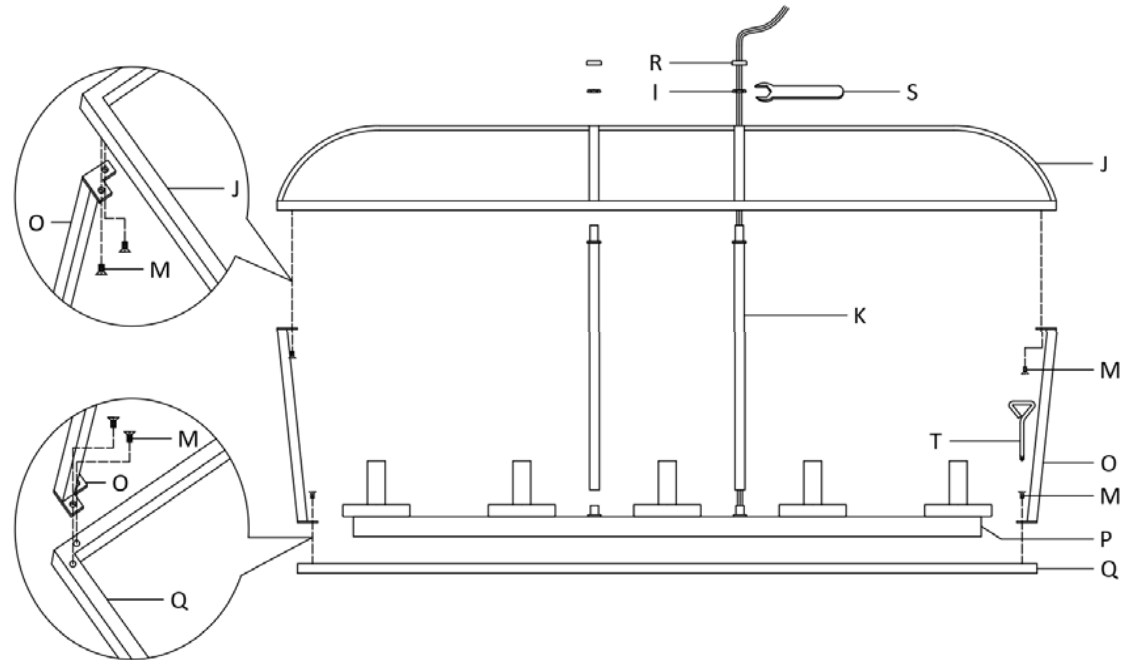


Step 2: Thread Center Rod (K) to Socket Assembly (P), Insert Center Rod (K) to Top Frame (J), then use Allen Wrench (S) secure with the Hex Nut (I). and then cover the Hex Nut (I) with the Cap (R). Use Screwdriver (T), attach the ends of the Square Tube Pillars (O) to the Top Frame (J) and Bottom Frame (Q) with Screw (M) .

PREPARATION

- * Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list.
- * If any part is missing or damaged, do not attempt to assemble the product.
- * Estimated Assembly Time: 20 minutes.
- * If you are having difficulty, our friendly Customer Care team is always here to help. Please email customersupport@safavieh.com

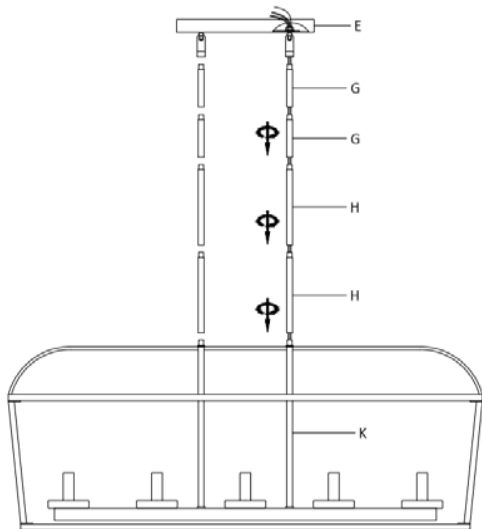

Step 3: Screw the Long Stem (H) and Short Stem (G) to the nipple of the Center Rod (K). Make sure to feed the branchwires of the fixture through the stems during assembly. Remove or add stems to adjust the height. Then screw the swivel of the canopy (E) to the stem. then secyre with the hex nut.

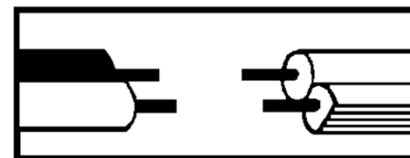

Step 4: wire connection


Connect fixture neutral wire (ribbed) to the outlet box neutral wire (usually white) using a wire connector (A).

Connect fixture hot wire (smooth with markings) to the outlet box hot wire (usually black) using a wire connector (A).


CAUTION: Do not reverse the hot and neutral connections

Grounding Instructions:

Wrap ground wire from outlet box around green ground screw (C) on mounting bracket, no less than 2" from wire end. Tighten ground screw. If fixture is supplied with a ground wire, connect to outlet ground wire with a wire connector (A).



Step 5: Tuck wires inside junction box. Attach the Canopy (E) to the Mounting Plate (B), and secure with the Canopy Nut (F).

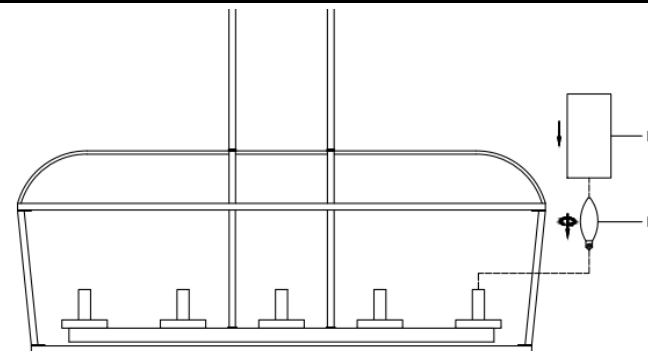

Step 6: Insert the Bulbs (N) into the Socket. Insert Glass (L) to socket cap.