

WARNING

- * Switch off the main electrical supply from the main fuse box / circuit breaker before installation.
- * Inspect item carefully before attempting to install.
- * If there is any damages or obvious defects, do not install.
- * Item may not be returned once it has been installed.








CARE AND MAINTENANCE

- * To clean the outside of the fixture, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the surface of the fixture.
- * To clean the inside of the fixture, first disconnect power to the fixture by turning off the circuit breaker or by removing the fuse at the fuse box. Next, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the interior surface of the fixture.
- * Do not use any cleaners with chemical, solvents or harsh abrasives. Use only a dry soft cloth to dust or wipe carefully

NOTICE& IMPORTANT SAFETY INSTRUCTIONS

- ** WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN **
- * Please make sure that you have all parts indicated before you begin assembly of this item
- * This item should be assembled on a soft surface to prevent scratching the finish during assembly
- * To reduce the risk of fire, electrical shock or injury to persons or property, please follow the guideline below for safe use and installation
- *The external flexible cable or cord of this lamp cannot be replaced
- If the cord is damaged, the lamp shall be destroyed

Part List and Hardware List


PIECE	DESCRIPTION	PICTURE	QUANTITY	PIECE	DESCRIPTION	PICTURE	QUANTITY
A	wire connector		3X	F	lamp body		1X
B	mounting bracket		2X				
C	tapping screw		4X				
D	Wall plug		4X	G	screwed ball		2X
E	mounting screw		2X				

SAFAVIEH

COUTURE


Model#: CTL1048

Product Dimensions: 17"L x 17"W x 16-88"H

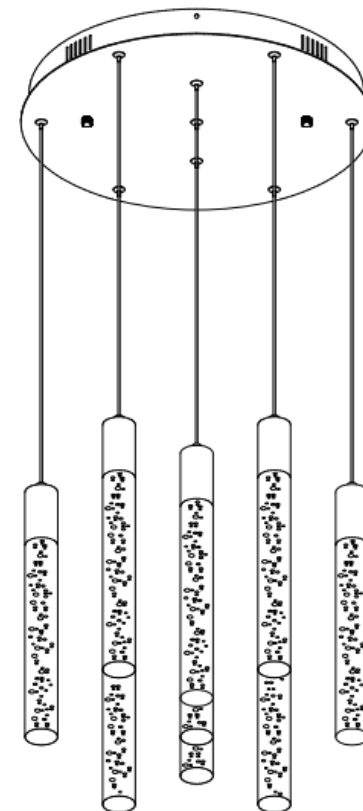


PREPARATION

- * Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list.
- * If any part is missing or damaged, do not attempt to assemble the product.
- * Estimated Assembly Time: 20 minutes.
- * Tools Required for Assembly (not included): Screwdriver, Junction box
- * If you are having difficulty, our friendly Customer Care team is always here to help. Please email customersupport@safavieh.com

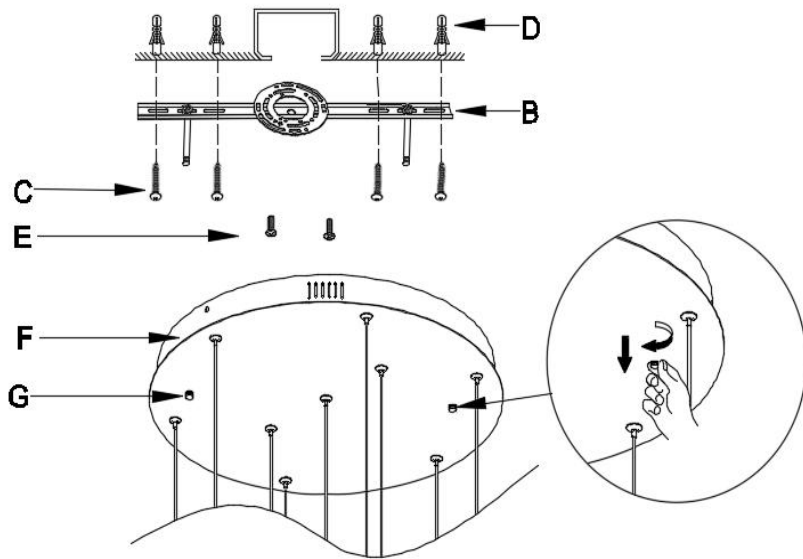

Step 1:

1. Remove the lighting fixtures and accessories from the packaging box.
2. Screw out the screw ball (G) on lamp body (F) and then remove bracket (B).
3. Punch the hole and install the Wall plug (D) to the ceiling. Fix the mounting bracket (B) to the outlet box with tapping screw (C) and mounting screw (E).

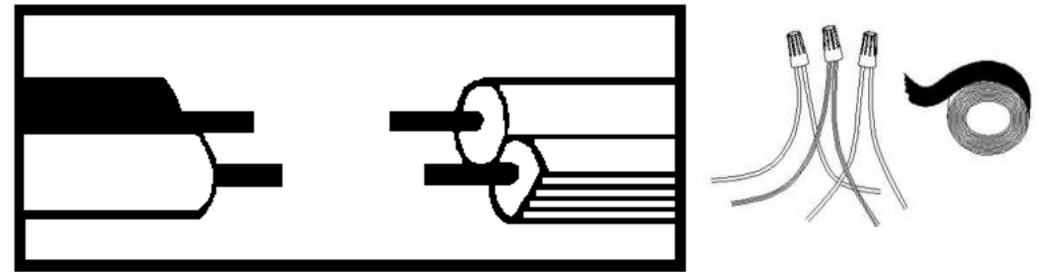

Step 2: Wire connection

Connect fixture neutral wire (ribbed) to the outlet box neutral wire (usually white) using a wire nut.

Connect fixture hot wire (smooth with markings) to the outlet box hot wire (usually black) using a wire nut.


CAUTION: Do not reverse the hot and neutral connections

Grounding Instructions:


Wrap ground wire from outlet box around green ground screw on mounting bracket, no less than 2" from wire end. Tighten ground screw. If fixture is supplied with a ground wire, connect to outlet ground wire with a wire nut.

PREPARATION

- * Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list.
- * If any part is missing or damaged, do not attempt to assemble the product.
- * Estimated Assembly Time: 20 minutes.
- * Tools Required for Assembly (not included): Screwdriver, Junction box
- * If you are having difficulty, our friendly Customer Care team is always here to help. Please email customersupport@safavieh.com

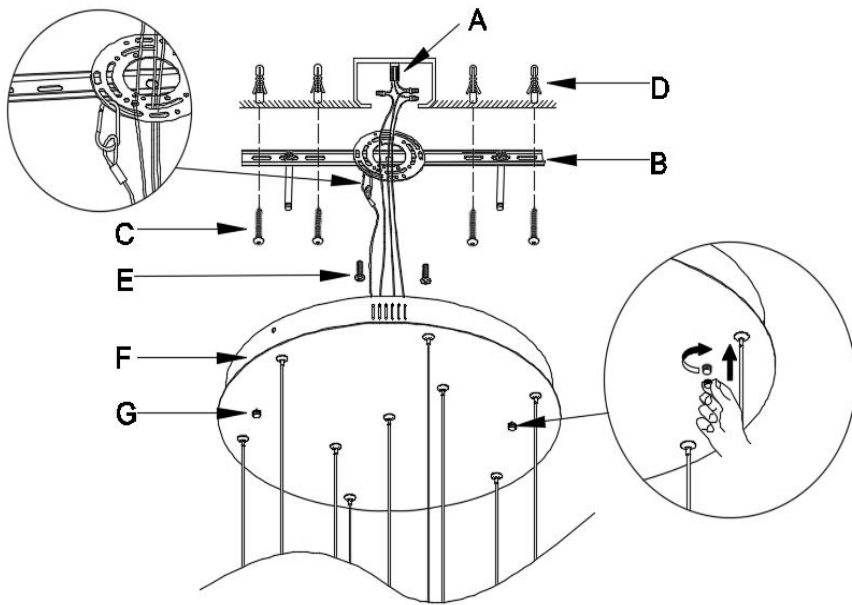

Step 3: Fix the safety buckle onto the bracket (B), and then use a screw ball(G) to fix the lamp body (F) onto the bracket (B)

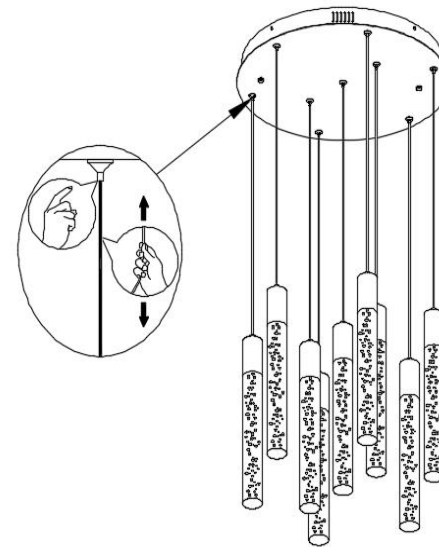

Step 4: Press the expansion piece and adjust the height of the lamp body. Turn on the light and adjust the brightness, and complete the installation.

Compatible Dimmer Model:

Brand	Model No.
TP-LINK	HS220
LUTRON	MACL-153M
LUTRON	DVCL-153P
LUTRON	PD-6WCL
LUTRON	P-PKG1W-WH-R
LEVITON	R11-DSL06-1TW
LEVITON	R00-RNL06-0TW
LEVITON	R68-06674-POT
LEVITON	R02-DW6HD-2RW