

CARE AND MAINTENANCE

To clean the outside of the fixture, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the surface of the fixture.

To clean the inside of the fixture, first disconnect power to the fixture by turning off the circuit breaker or by removing the fuse at the fuse box. Next, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the interior surface of the fixture.

Do not use any cleaners with chemical, solvents or harsh abrasives. Use only a dry soft cloth to dust or wipe carefully.

NOTICE & IMPORTANT SAFETY INSTRUCTIONS

* Please make sure that you have all parts indicated before you begin assembly of this item

* This item should be assembled on a soft surface to prevent scratching the finish during assembly

* To reduce the risk of fire, electrical shock or injury to persons or property, please follow the guideline below for safe use and installation


*The external flexible cable or cord of this luminaire cannot be replaced

If the cord is damaged, the luminaire shall be destroyed



Model#: LIT4191A

Product Dimensions: 15.375"D X 6.125"H

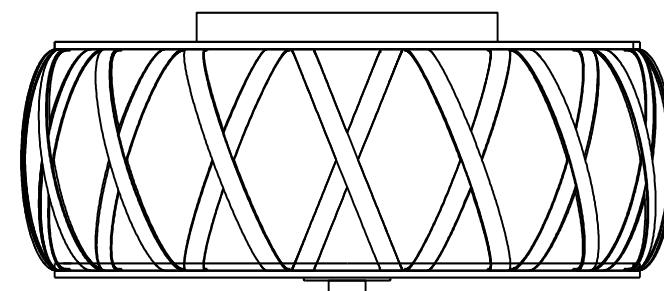

Part List and Hardware List

PIECE	DESCRIPTION	PICTURE	QUANTITY	PIECE	DESCRIPTION	PICTURE	QUANTITY
A	machine screw	A small, standard machine screw with a flat head and a Phillips slot.	2X	G	threaded rod	A long, thin metal rod with a square or hexagonal cross-section and a threaded end.	1X
B	mounting bracket	A rectangular metal bracket with mounting holes and a slot for a threaded rod.	1X	H	shade	A cylindrical shade with a crisscross or pleated pattern.	1X
C	mounting screw	A larger, flat-head screw used for mounting the shade.	1X	I	glass diffuser	A thin, rectangular glass plate.	1X
D	wire connector	A cylindrical connector used for joining wires.	1X	J	decorative disc	A small, flat decorative disc.	1X
E	ground screw	A screw used for grounding the fixture.	1X	K	finial	A small, decorative cap or finial.	1X
F	hex nut	A hexagonal nut used for assembly.	1X	L	bulb	A simple line drawing of a light bulb.	2X


PREPARATION

Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list. If any part is missing or damaged, do not attempt to assemble the product.

Estimated Assembly Time: 20 minutes.

1. Fix the mounting bracket (B) to the outlet box with machine screw (A).
2. Make wire connections, with wire connectors, following the reference chart listed below.

Connect, Hot, Black or Red Outlet Supply Wire to:	Connect, Neutral, White Outlet Supply Wire to:
Black	White
* Parallel Cord (round & smooth)	* Parallel Cord (square & ridged)
Clear, Brown, Gold or Black without Tracer (colored stripes)	Clear, Brown, Gold or Black with Tracer (colored stripes)
Insulated Wire (not green) with copper metal conductor	Insulated Wire (not green) with Silver metal conductor.




*Note: When parallel wire (SPT I & SPT II) is used. The neutral wire is square shaped and ridged and the hot wire will be round in shape and smooth. (See Illustration on left.)

Grounding Instructions:

- a) For installation in the United States: Wrap ground wire from outlet box around green ground screw on mounting bracket, no less than 2" from wire end. Tighten ground screw. If fixture is supplied with a ground wire, connect to outlet ground wire with a wire connector.
- b) For installation in Canada: If fixture is supplied with ground wire, wrap ground wire around green grounding screw on mounting bracket. Tighten ground screw.

3. Orient the ceiling canopy so that you can use the mounting screw (C) to fix it to the mounting bracket.
4. Install bulbs. Be sure to use light bulb (L) with wattage no greater than specified on this fixture. Always make sure that electrical current is turned off before changing bulbs.
5. Fix the threaded rod (G) into the hex nut (F) beneath the canopy. Then put on the shade (H) and glass diffuse and fix them in place with decorative disc (J) and finial (K).

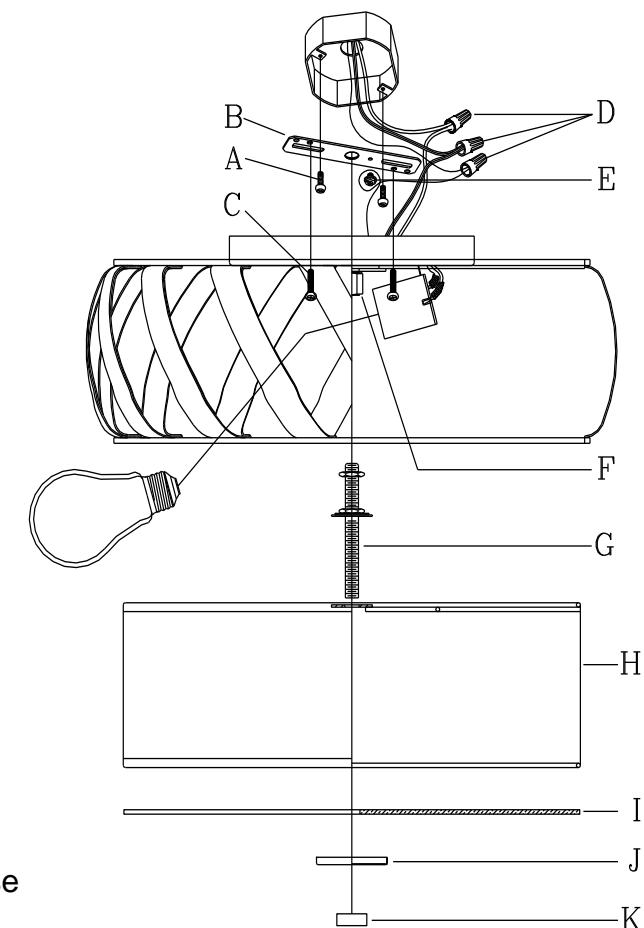

ENJOY YOUR LAMP