


UNCONTROLLED

NOV 2 5 2002

Controlled copy must be in Red

NOTES:

1. PARTS TO HOLD THREADED BOLT IN PLACE IN A SUB-ASSEMBLY AS A TEMPORARY FASTENER UNTIL FINAL ASSEMBLY.
2. PERFORMANCE:
MAX PUSH ON FORCE = 200 N
MIN HOLDING STRENGTH= 1335.0 N

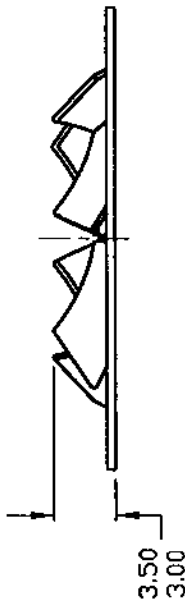

TINNERMAN PALNUT
ENGINEERED PRODUCTS, LLC
MOUNTAINBIDE, NJ

MATERIAL:
CARBON SPRING STEEL-46-SAE1050

HARDNESS: ROCKWELL 30N 58-68

PAL	PALNUT	DN SERT	PUSHNUT
TITLE			
PUSHNUT FASTENER, ROUND FLAT TYPE, STYLE 'PT' BOLT RETAINER 14mm x 25mm SIZE			
DRAWN	R.S	RELEASED	SCALE
DATE	2/4/87	PART No: PT141525	NONE
CHECKED		DWG No.	
APPROVED	<i>WJ</i>		PT141525

DATE	REV	DESCRIPTION	BY
11/19/02	B	EC0#310: ADDED PERFORMANCE NOTE(2) & REMOVED PLUG PAGE NOTE, 13.00 REF. WAS 13.25/12.75	BA
11/29/00	A	EC0180: DISCLAIMER NOTE ADDED.	CNC
02/10/87	-	REDRAWN IN AUTOCAD	M.S.
3/16/87	-	.46 WAS .38	R.S
		13.25/12.75 WAS 13.00/12.70	
		3.50/3.00 WAS 3.68/3.17	