

WARNING

- ** WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN **
- * Switch off the main electrical supply from the main fuse box / circuit breaker before installation.
- * Inspect item carefully before attempting to install.
- * If there is any damages or obvious defects, do not install.
- * Item may not be returned once it has been installed.

CARE AND MAINTENANCE

- * To clean the outside of the fixture, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the surface of the fixture.
- * To clean the inside of the fixture, first disconnect power to the fixture by turning off the circuit breaker or by removing the fuse at the fuse box. Next, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the interior surface of the fixture.
- * Do not use any cleaners with chemical, solvents or harsh abrasives. Use only a dry soft cloth to dust or wipe carefully.

NOTICE& IMPORTANT SAFETY INSTRUCTIONS

- * Please make sure that you have all parts indicated before you begin assembly of this item
 - * This item should be assembled on a soft surface to prevent scratching the finish during assembly
 - * To reduce the risk of fire, electrical shock or injury to persons or property, please follow the guideline below for safe use and installation
 - *The external flexible cable or cord of this lamp cannot be replaced
- If the cord is damaged, the lamp shall be destroyed


Part List and Hardware List

PIECE	DESCRIPTION	PICTURE	QUANTITY	PIECE	DESCRIPTION	PICTURE	QUANTITY
A	Bend tube A		1X	I	Wire harness		1X
B	Bend tube B		1X	J	Nut		3X
C	Bend tube C		1X	K	Spacer sheet		3X
D	Canopy		1X	L	Wire connector		5X
E	Tube E (∅ 11.7*L820mm)		2X	M	Self-tapping screw		2X
F	Tube F (∅ 11.7*L700mm)		1X	N	Wrench		1X
G	Mounting bracket		1X	O	Bulb		3X
H	Screwed ball		2X	P	Explosion screw		2X

 **SAFAVIEH**
LIGHTING

Model#: LIT4461A


Product Dimensions: 47"L X 43"W X 41"H

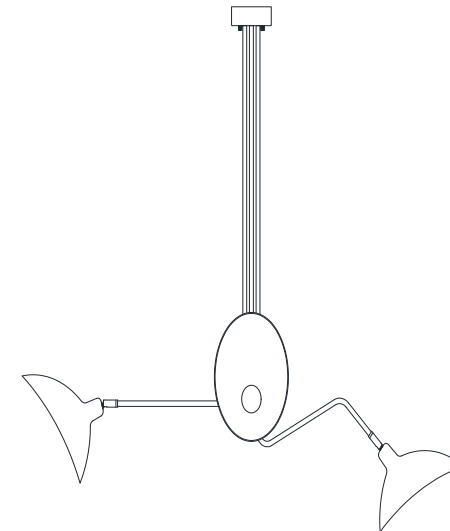


PREPARATION

- * Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list.
- * If any part is missing or damaged, do not attempt to assemble the product.
- * Estimated Assembly Time: 20 minutes.
- * If you are having difficulty, our friendly Customer Care team is always here to help. Please email customersupport@safavieh.com



NOTE: PLEASE USE ON/OFF TYPE "A" BULB MAX 60-WATT OR CFL BULB 13-WATT OR LED BULB MAX 9-WATT THERE ARE 3PCS LED 9-WATT BULB IN THE BOX

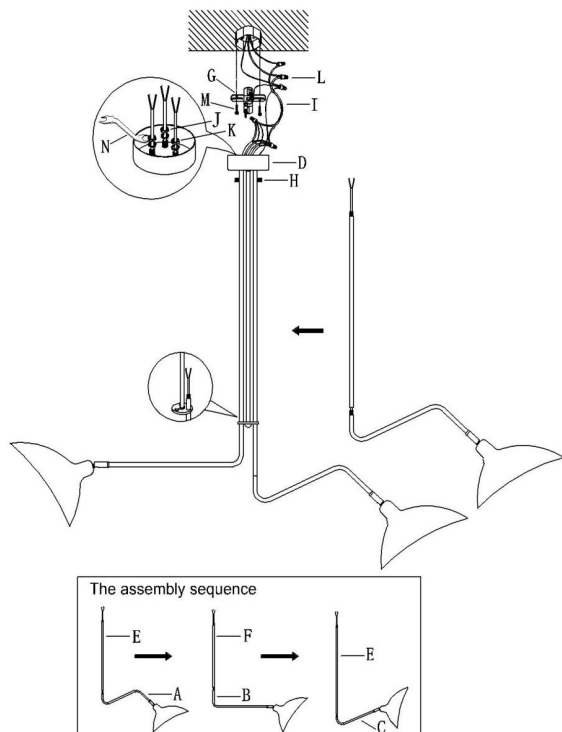

Step 1: Unpack all parts from cartons carefully. Embed explosion screw(P) into the wall. Fix the mounting bracket (G) to the outlet box. Inserting self-tapping screw (M). According the assembly sequence on the right. connect the tube(E) into bend tube(A) and (C). connect the tube(F) into bend tube(B). After that, embedding spacer sheet(K) and using the nut(J) to fix the tube(E& F) on the canopy(D). by wrench(N).

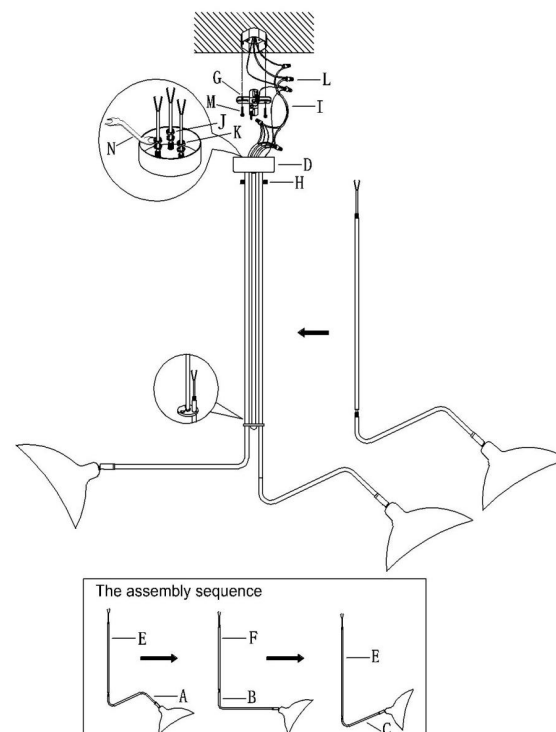

Step 2: Orient the Canopy(D) so that the mounting screws. protruding from the mounting bracket go into. the holes in the canopy, then secure it with. the provided knurled nut (H).

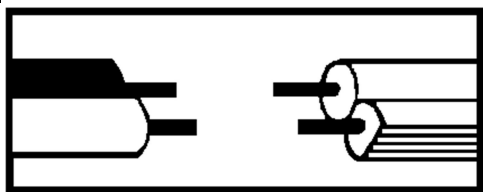


Step 3: Wire connection

Make wire connections, using wire harness (I) connect wire and the main power supply cord, with wire connector (L), following the reference chart listed below. CAUTION: When parallel wire (SPT1&SPT11) is used. The neutral wire is square shaped and ridged and the hot wire will be round in shape and smooth. (See illustration on left).

Grounding Instructions:

Wrap ground wire from outlet box around green ground screw on mounting bracket, no less than 2" from wire end. Tighten ground screw. If fixture is supplied with a ground wire, connect to outlet ground wire with a wire connector (E).

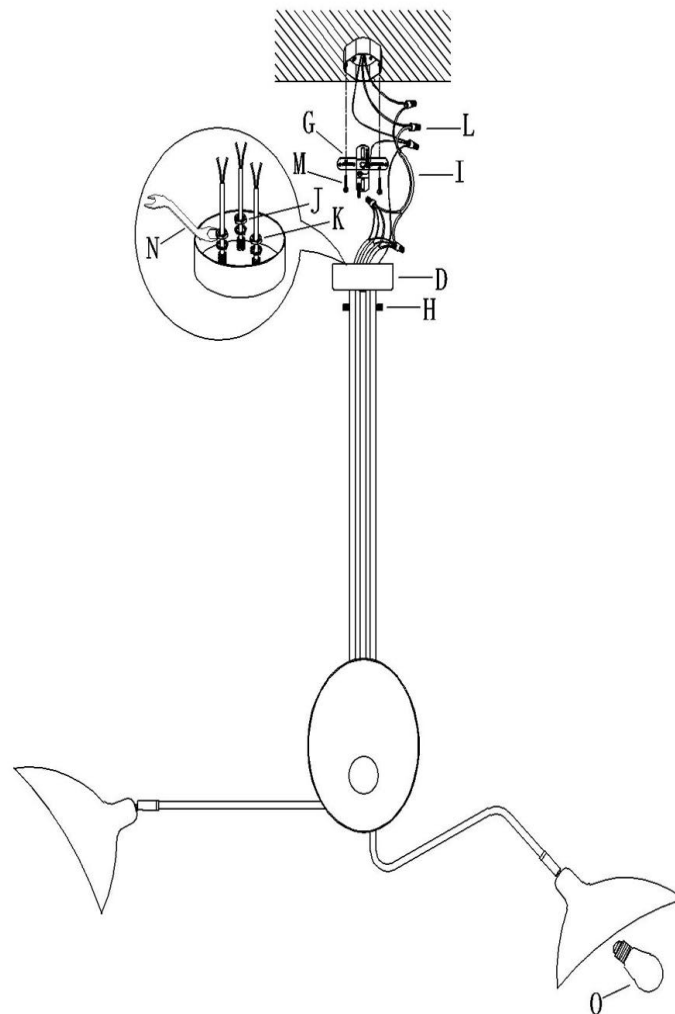

Step 4: Install bulbs (O). Be sure to use light bulb (O) with wattage no greater than specified on this fixture. Always make sure that electrical current is turned off before changing bulbs.