
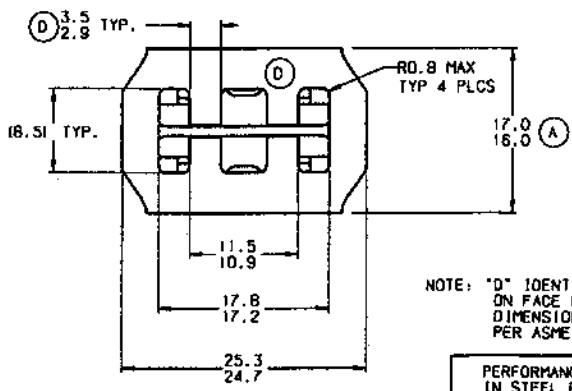
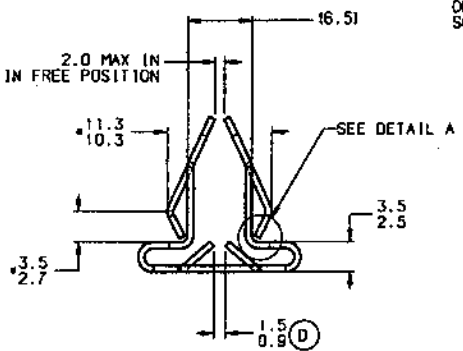
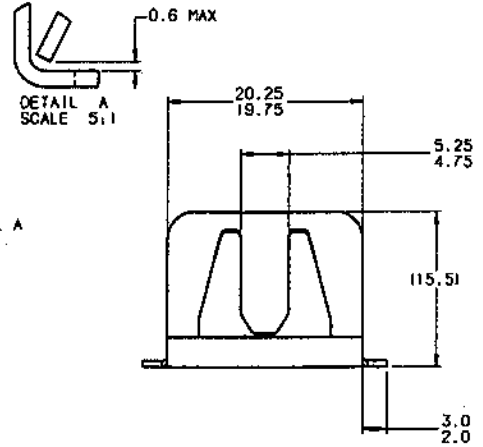


REVISIONS

E.C.O	REV	DESCRIPTION	DATE	DR	CK	APP
3013	A	17.0/16.0 WAS 116.51	05/29/02	MV	RR	HR
3029	B	PERFORMANCE SPECIFICATIONS ADDED	07/08/02	MV	RR	HR
3035	C	60 N WAS 112 N	07/12/02	MV	RR	HR
3092	D	BARBS REVISED	11/26/02	RC	RR	HR
		1.5/0.9 WAS 1.1/0.5				
		3.5/2.9 WAS 2.3/1.3				

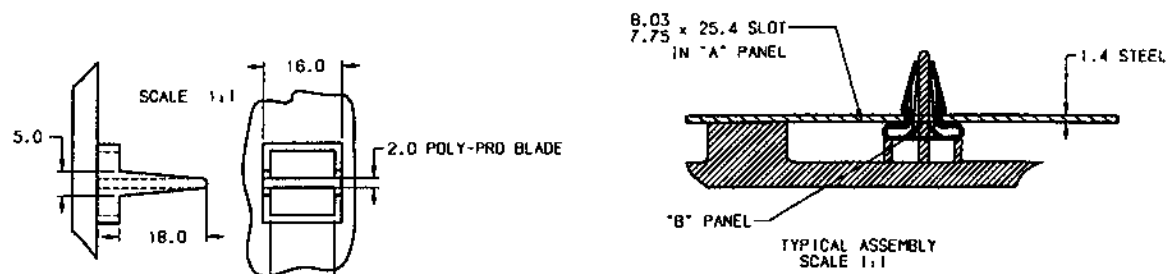

NOTE: "\*" DIMENSION MEASURED WHEN 2.0 MAX DIMENSION IS HELD AT 1.0.

NOTE: "D" IDENTIFICATION TO APPEAR ON FACE OF PART. DIMENSIONING AND TOLERANCING PER ASME Y14.5M.



ACTUAL SIZE

PERFORMANCE SPECIFICATIONS IN STEEL PANEL "A" Re50-56	
MAX. INSTALLATION FORCE IN 7.75 SLOT	89 N
MIN. REMOVAL FORCE IN 8.03 SLOT	60 N (C)

MARK TOOL:



P.O. Box 2492  
Hamilton, Ontario, Canada  
L8N 3K1

DRAWN BY	DATE	CHECKED	SCALE	APPROVED
M. VANDERZWAAG	04/26/02	R. RANK IN RELEASED 05/08/02	2:1	H. RATTMANN 1ST. PRG. 05/08/02

MATERIAL	THICKNESS	HEAT TREAT	FINISH HARDNESS
SAE 1050-1065	0.64	AUSTEMPER	Rc44-51

NAME: TRIM CLIP PRODUCT CODE: 930

SPECIAL FEATURES:

SHEET	OF	DWG NO	SIZE
1	1	D99020-064M	B