




VisionSystems

SAFE-T-SCOPE®



Heavy Duty Color Backup Camera System With 5" LCD Monitor & Two Camera Inputs

for Work Trucks, Vans, Buses, RV's & Trailers

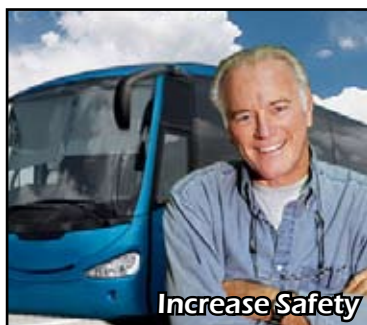

- Rugged High Resolution 5" LCD Color Monitor With Ultra Sharp Display
- System Can Accept Up to 2 Camera Inputs for Multiple Camera Views
- Rugged Bullet Camera Provides 120° Field Of Vision
- 6 High-Output InfraRed LED's
- Built In Camera Microphone & Powerful Monitor Speakers
- Versatile Mounting On Dashboard, Windshield or Overhead Location
- One Year Warranty Included



VisionSystems

• 90-21 144th Place • Jamaica, NY 11435 • USA •
800.227.2095 • Tel 718.526.2601 • Fax 718.297.0323
www.roscovision.com • www.roscomirrors.com





MONITOR P/N: STSM213 (Included In Kit)

Screen Size (Diagonal)	7"
Maximum No. of Cameras	1 Input/Channel
Resolution	1296(H) x 211(V)
Screen Ratio	16:9
Contrast Ratio	350:1
Voltage Input	10~32 Vdc
Operating Temperature °F (C°)	-5° to 150° (-20° to +65°)
Storage Temperature °F (C°)	-13° to 158° (-25° to +70°)
Viewing Angles Up/Dn/Lt/Rt	15° x 35° x 50° x 50°
Shock Rating	100G
Vibration Rating	15G
Weight	0.9 lb.
Dimensions W x H x D	6.9" x 5" x 1"
Other Features	Menu - selectable mirror/normal image, Button - selectable day/night dimming



CAMERA P/N: STSC108 (Included In Kit)

Image Device	Generic 1/3" CMOS
Pixels	250,000
TV Lines	380
InfraRed LED's	18
Minimum Illumination	0 LUX (Infrared LED's on)
Night Vision Range	20 Feet
Video Output	1.0 Vp-p, 75 Ohm
Dust/Water Rating	IP67
Shock Rating	100G
Vibration Rating	15G
Field of View	115°
Operating Temperature F°	-15° to +160°
Storage Temperature F°	-20° to +176°
Weight	.6 lb.
Dimensions W x H x D	3" x 2" x 2"



STSC108
Standard Camera

Optional Cameras:



STSC106
Wide Angle
Bullet Camera



STSC109B
Universal L/R
Side Camera



STSC112
License Plate
Camera

HARNESS P/N: STSH365 (Included In Kit)

65' Heavy Duty w/ Twist - Lock Connectors

Optional Harnesses:

- STSH303 - 33' Harness
- STSH304 - 16.5' Harness Extension
- STSH394 - Heavy Duty Coilcord
Quick Disconnect Kit
w/ 16.5' Harness



STSH365
Standard Harness

Optional Harnesses:



STSH303



STSH304



STSH394