

MONITOR P/N: STSM213

Screen Size (Diagonal)	7"
Resolution	1296(H) x 211(V)
Screen Ratio	16:9
Contrast Ratio	350:1
Voltage Input	10~32 Vdc
Voltage Output	12 Vdc
Max No. of Cameras	1
Viewing Angles Up/Dn/Lt/Rt	15 x 35 x 50 x 50
Shock Rating	100g
Vibration Rating	15g
Color Configuration	RGB Stripe
Operating Temperature °F (C°)	-5° to +150° (-20° to +65°)
Storage Temperature °F (C°)	-13° to 158° (-25° to +70°)
Dimensions WxHxD in (mm)	6.9 x 5 x 1 (175 x 125 x 23)
Weight lb. (Kg)	0.9 (0.5)
Other Features	Switch - selectable mirror/normal image, Button - selectable day/night dimming



CAMERA P/N: STSC108

Image Device	Generic 1/3" CMOS OV7949
Pixels	250,000
TV Lines	380
Video Output	1.0 Vp-p, 75 Ohm
Field of View	115°
Lens Focal Length	2.6mm
Sync System	Internal
Minimum Illumination	0 Lux (Infrared LED's on)
InfraRed LED's	18
Night Vision Range	20 feet
Dust/Water Rating	IP67
Shock Rating	100g
Vibration Rating	15g
Power Supply	12 Vdc from Monitor
Current	200 mA
Operating Temperature F° (C°)	-15° to +160° (-25° to +70°)
Storage Temperature F° (C°)	-20° to +176° (-30° to +80°)
Dimensions WxHxD in (mm)	3 x 2 x 2 (75 x 48 x 49)
Weight lb. (Kg)	0.6 (0.26)




HARNESS P/N: STSH365

65' Heavy Duty with Twist-lock Connectors



**Specifications subject to change without notice*

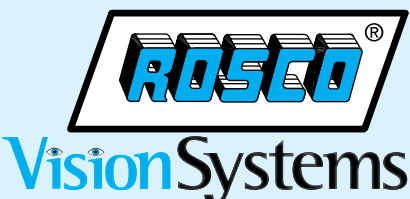

A Century of Automotive Vision Safety

90-21 144th Place
Jamaica, New York 11435
Phone: 718-526-2601
Fax: 718-297-0323
www.roscovision.com
Cat No. 051112