



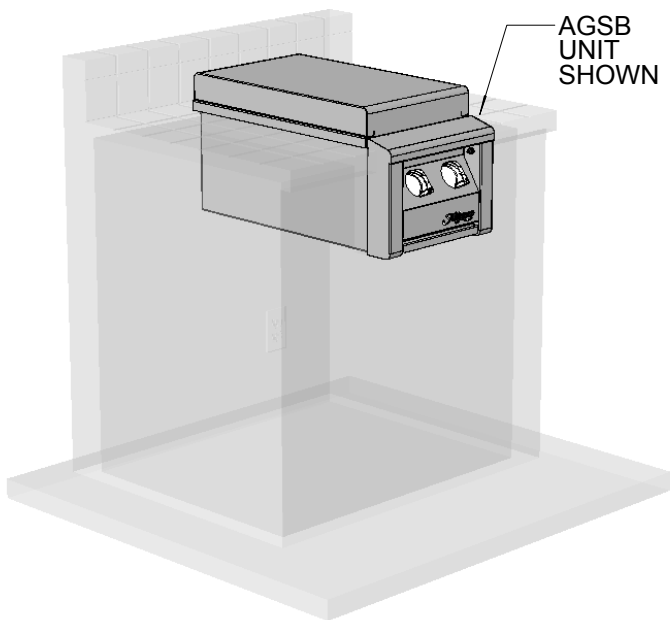

AGSB TYPICAL INSTALLATION


COUNTERTOP CUTOUT REQUIREMENTS

NOTE 1:
A GAS LINE IS REQUIRED INSIDE THE COUNTER FOR OPERATION.
IT IS RECOMMENDED THAT A FLEXIBLE GAS LINE IS USED TO EASE INSTALLATION IN NATURAL GAS (NG) SETUPS.
(SEE NOTE 2 IN REGARDS TO LP GAS SETUPS)

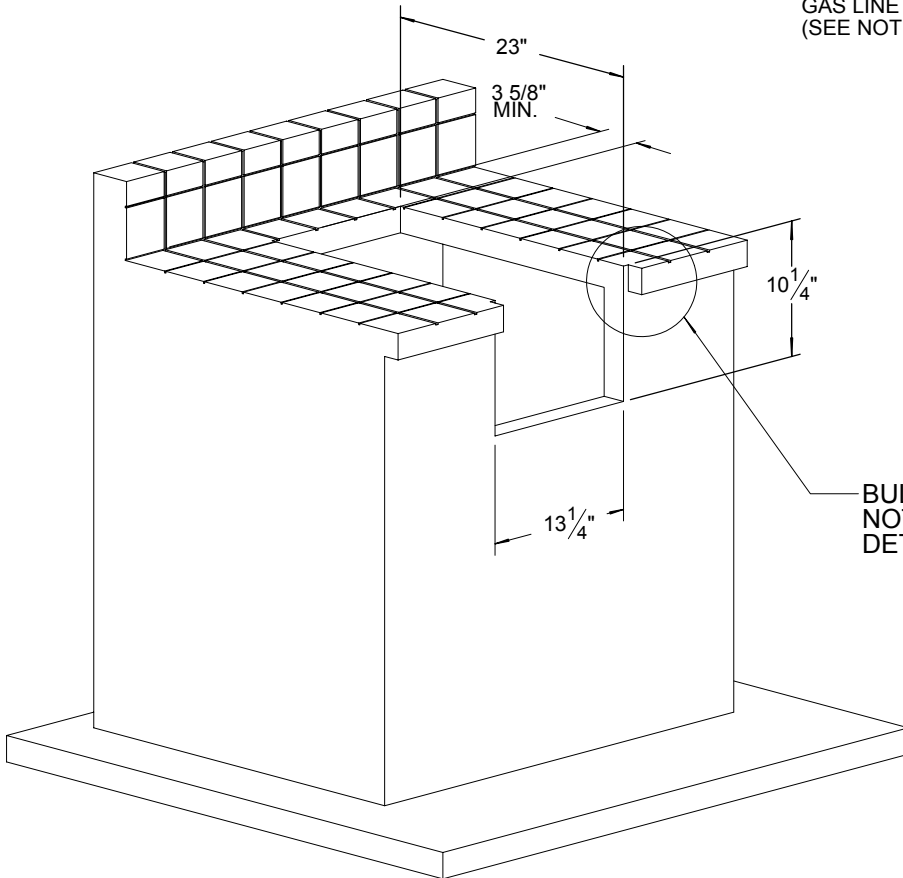


BULLNOSE
NOTCH
DETAIL


AGSB - DUAL SIDE BURNER

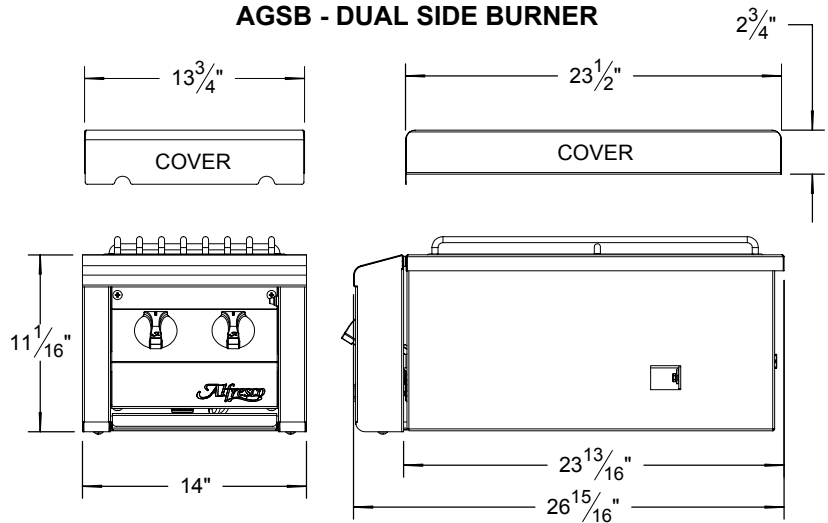

BACK VIEW

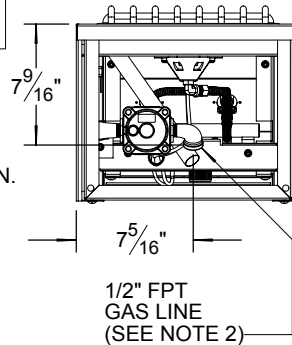

LP GAS SETUP:

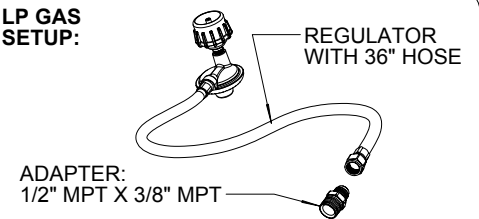

NOTE 2:
STANDARD UNIT HAS A NATURAL GAS (NG)
CONNECTION WITH 1/2" FPT FITTING.

IF LIQUID PROPANE (LP) OPTION IS ORDERED
THE UNIT IS SUPPLIED WITH A REGULATOR,
HOSE AND ADAPTER FITTING AS SHOWN.

TOP VIEW

