


## Sheet1

EASY INSTALLATION MEANS YOU'LL BE DRINKING YOUR FIRST CUP IN NO TIME.

An installation guide is available for existing homes or new construction. Once the rough-in box is installed, your Brew Express slides in with easy connections.

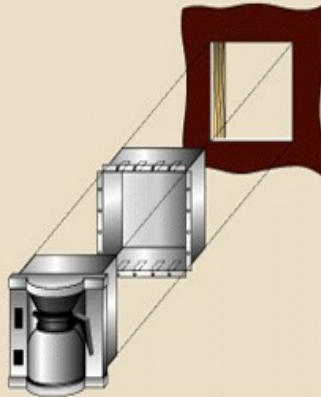

NEVER SPILL WATER AGAIN.

Water is plumbed into this system with two different options:

- A** in the wall to your sink or refrigerator area,
- or
- B** utilizing an everyday dispenser bottle and pump (not included).



# Specifications and Requirements

**IMPORTANT:**

Read and follow instructions carefully before installing your BREW EXPRESS™ in-the-wall COFFEE SYSTEM. For best results its advised that you hire a qualified professional.

**Specification Requirements**

1. Overall dimensions (Finished Unit with Rough-in Box) approximately 12.5" x 12.5".
2. Dimensions for Rough-in-Box (Mounting Structure) approximately 11.5" x 11.5" x 4".
3. Power requirements 120VAC, 60HZ. Unit requires 12.9 amps for 1400W.
4. Water requirements 1/4" water supply line (copper or poly) minimum 30 psi to a maximum of 120 psi. Potable COLD water is required.

If water is not available, an alternate water dispenser jug (5 gallons) can be used with the optional pump accessory (not supplied). Contact dealer or Lance Larkin™

Please Note: A filter and shut off valve at water source is highly recommended.

The filter such as an ice maker type filter, can easily be installed at the source. If water lines are not purged or clear of debris or a filter is NOT installed, foreign particles (debris) in water may clog brewer system causing failure, and may void all warranties.

