

# Power Mod


## Type WB Standard Circuit Breaker Mains

Factory installed lugs are standard on 200-1200A standard breaker main modules. Additional lug kit options are available for 750 conductor size. Refer to pages 3-126 – 3-127 for lug kit options on 200-1200A standard main breakers. In addition, a field installable compression lug landing pad is also available. Refer to page 3-129 for lug landing pad options. NEMA 2-stud compression lugs must be installed by user or utility.

*Suitable for use as service equipment. Bonding means may be removed for non-service entrance equipment applications.*

Lugs are NOT included on 1400A-2000A standard breaker main modules and must be ordered separately.


Refer to pages 3-126–3-127 for lug size options.

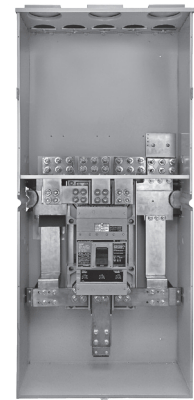


3  
METER  
CENTERS

## Standard Mains – Three Phase

### Thermal magnetic circuit breaker service entrance modules: 3-phase, 4-wire SN, 240V AC max

Catalog number (65k AIC) <sup>③</sup>	Catalog number (100k AIC) <sup>② ③</sup>	Catalog No. (65k AIC) Blank Endwall	Catalog No. (100k AIC) Blank Endwall	Amp. rating	Service feed	Breaker type <sup>⑤</sup>	Dimensions (inches) <sup>①</sup>			Factory installed line side connections	Knockout Diagram
							Height	Width	Depth		
WB3200C <sup>②</sup>	WB3200CU	WB3200CNH	WB3200CUNH	200	OH/UG	JXD6	39.19	15.20	11.03	(2) 3/0-500 kcmil CU (2) 1/0-500 kcmil AL	KB-1
WB3250C <sup>②</sup>	WB3250CU	WB3250CNH	WB3250CUNH	250	OH/UG	JXD6	39.19	15.20	11.03	(2) 3/0-500 kcmil CU (2) 1/0-500 kcmil AL	
WB3300C <sup>②</sup>	WB3300CU	WB3300CNH	WB3300CUNH	300	OH/UG	JXD6	39.19	15.20	11.03	(2) 3/0-500 kcmil CU (2) 1/0-500 kcmil AL	
WB3350C <sup>②</sup>	WB3350CU	WB3350CNH	WB3350CUNH	350	OH/UG	JXD6	39.19	15.20	11.03	(2) 3/0-500 kcmil CU (2) 1/0-500 kcmil AL	
WB3400C	WB3400CU	WB3400CNH	WB3400CUNH	400	OH/UG	JXD6	39.19	15.20	11.03	(2) 3/0-500 kcmil CU (2) 1/0-500 kcmil AL	
WB3450C <sup>②</sup>	WB3450CU	WB3450CNH	WB3450CUNH	450	OH/UG	LXD6	39.19	15.20	11.03	(2) 3/0-500 kcmil CU (2) 1/0-500 kcmil AL	
WB3500C <sup>②</sup>	WB3500CU	WB3500CNH	WB3500CUNH	500	OH/UG	LXD6	39.19	15.20	11.03	(2) 3/0-500 kcmil CU (2) 1/0-500 kcmil AL	
WB3600C	WB3600CU	WB3600CNH	WB3600CUNH	600	OH/UG	LXD6	39.19	15.20	11.03	(2) 3/0-500 kcmil CU (2) 1/0-500 kcmil AL	KB-2
WB3700C <sup>②</sup>	WB3700CU	WB3700CNH	WB3700CUNH	700	OH/UG	MXD6	61.19	24.19	11.03	(3) 1/0-500 kcmil	
WB3800C	WB3800CU	WB3800CNH	WB3800CUNH	800	OH/UG	MXD6	61.19	24.19	11.03	(3) 1/0-500 kcmil	KB-3
WB3900C <sup>②</sup>	WB3900CU	WB3900CNH	WB3900CUNH	900	OH/UG	NXD6	61.19	24.19	11.03	(4) 1/0-500 kcmil	
WB31000C	WB31000CU	WB31000CNH	WB31000CUNH	1000	OH/UG	NXD6	61.19	24.19	11.03	(4) 1/0-500 kcmil	KB-4
WB31200C	WB31200CU	WB31200CNH	WB31200CUNH	1200	OH/UG	NXD6	61.19	24.19	11.03	(4) 1/0-500 kcmil	
WB31400T <sup>②④</sup>	WB31400TU <sup>④</sup>	WB31400TNH	WB31400TUNH	1400	OH	PXD6	72.06	31.34	14.66	3 Sets of 2 Studs  (lugs not included)	KB-4
WB31400B <sup>②④</sup>	WB31400BU <sup>④</sup>	—	—		UG	PXD6	72.06	31.34	14.66		KB-5
WB31600T <sup>④</sup>	WB31600TU <sup>④</sup>	WB31600TNH	WB31600TUNH	1600	OH	PXD6	72.06	31.34	14.66		KB-4
WB31600B <sup>④</sup>	WB31600BU <sup>④</sup>	—	—		UG	PXD6	72.06	31.34	14.66		KB-5
WB31800B <sup>②④</sup>	WB31800BU <sup>④</sup>	—	—	1800	UG	RXD6	72.06	31.34	14.66		KB-6
WB31800W	WB31800WU	WB31800WNH	WB31800WUNH		OH/UG	RXD6	72.06	50.56	14.66		KB-5
WB32000B <sup>③④</sup>	WB32000BU <sup>④</sup>	—	—	2000	UG	RXD6	72.06	31.34	14.66	KB-5	
WB32000W <sup>②④</sup>	WB32000WU <sup>④</sup>	WB32000WNH	WB32000WUNH		OH/UG	RXD6	72.06	50.56	14.66	KB-6	

### DAS electronic circuit breaker service entrance modules with blue light maintenance mode: 3-phase, 4 wire SN, 240V AC max

Catalog number (65k AIC) <sup>③</sup>	Catalog number (100k AIC) <sup>② ③</sup>	Catalog No. (65k AIC) Blank Endwall	Catalog No. (100k AIC) Blank Endwall	Amp. rating	Service feed	Breaker type <sup>⑤</sup>	Dimensions (inches) <sup>①</sup>			Factory installed line side connections	Knockout Diagram
							Height	Width	Depth		
WBM31200C	WBM31200CU	WBM31200CNH	WBM31200CUNH	1200	OH/UG	SND6	61.19	24.19	11.03	(4) 1/0-500 kcmil	KB-3
WBM31400T	WBM31400TU	WBM31400TNH	WBM31400TUNH	1400	OH	SPD6	72.06	31.34	14.66	3 Sets of 2 Studs  (lugs not included)	KB-4
WBM31400B	WBM31400BU	—	—	1400	UG	SPD6	72.06	31.34	14.66		KB-5
WBM31600T	WBM31600TU	WBM31600TNH	WBM31600TUNH	1600	OH	SPD6	72.06	31.34	14.66	KB-4	
WBM31600B	WBM31600BU	—	—	1600	UG	SPD6	72.06	31.34	14.66	KB-5	

① Dimensions shown are representative of outside box dimensions and do not include allowances for mounting bumps, endwalls, covers, hubs, or hardware protrusions. Dimensions are subject to change.

② Additional lead time required. Contact sales office for details. 100K and non-standard amperage modules.

③ Factory installed lugs standard on 200-1200A standard breaker main modules. Additional lug kit options available for 750 conductor size. Field installable compression lug landing pad also available. NEMA 2-stud compression lugs must be installed by user or utility. Lugs NOT included on 1400A-2000A standard breaker main modules and must be ordered separately.

④ 1200 amp maximum feed per side-must be used as a center fed main.

⑤ All breakers have a non-interchangeable trip unit.