


Warnings

- Follow the instructions carefully on articles to be inflated, never exceed recommended pressure. Bursting items can cause serious injury.
- There are no user serviceable parts.
- Do not use under wet conditions. Keep away from water.
- Never look into or point any opening toward your eyes while pump is operating.
- Do not attempt to put any objects into the inflation or deflation port at any time.
- Never leave pump unattended while in use.
- Never allow sand, paper, debris or small articles to be sucked into pump while operating.
- Let pump cool before storing the pump inside the box after use.

CAUTION: Do not block the air portals during operation, this could damage the motor.

Parts List

1. 5010000712
4D (6V) Battery Pack

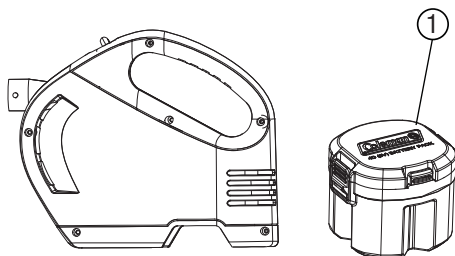

Alternative Power Sources For This Product

- 2000002672
6V NiMH Rechargeable Battery Pack
- 2000003287
6V Sealed Lead Acid Rechargeable Battery Pack



Note: To order an alternative power source for this product, please go to www.coleman.com or call Coleman Customer Service.



Please call or write to us at our nearest location with any comments or questions.

The Coleman Company, Inc. • 3600 North Hydraulic • Wichita, Kansas 67219 U.S.A.
1-800-835-3278 in the United States • www.coleman.com

© 2011 The Coleman Company, Inc. All right reserved.

Coleman®, , and  are registered trademarks and QuickPump™ and Double Lock™ are trademarks of The Coleman Company, Inc.

4010013339 (ECN20017008-01)



How to Use and Enjoy Your Coleman®

4D Battery CPX™ 6 Pump



- Inflates AND deflates.
- Adaptor works with Coleman® Double Lock™ Valve as well as other airbed valves on the market.
- Operates on four D-cell batteries.
- Always purchase the correct size and grade of battery most suitable for the intended use.
- Replace all batteries of a set at the same time.
- Ensure the batteries are installed correctly with regard to polarity (+ and -).
- Remove batteries from equipment which is not to be used for an extended period of time.
- Remove used batteries promptly.

To Install Or Replace Batteries

Your new pump operates on 4 “D” cell batteries. For longest life, use alkaline batteries.

1. With pump off, turn upside down and press two release tabs to remove 4D battery pack. (Fig. 1)
2. Press snap feature to open the 4D battery pack top cover. (Fig. 2)
3. Install 4 batteries in the correct orientation as shown on the battery housing. Always be careful that all 4 batteries are installed correctly. (Fig. 3)
4. Close top cover and install 4D battery pack properly into the pump. (Fig. 4)

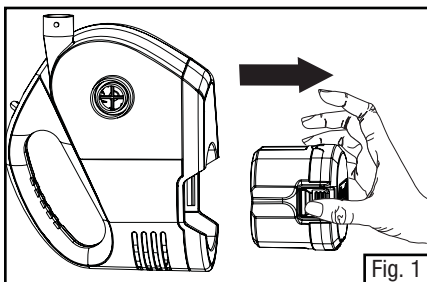


Fig. 1




Fig. 2




Fig. 3


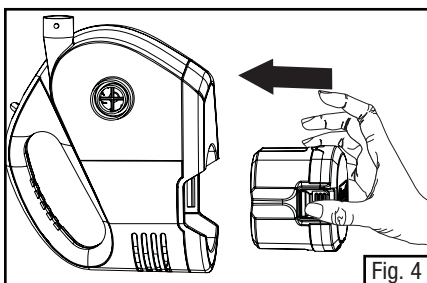



Fig. 4

Note: For optimum performance, alkaline batteries are recommended.

Inflating Coleman® Double Lock™ Valve

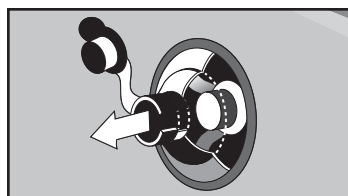


1. To begin inflation, open external cap and pull firmly on the lanyard to extend out. This will open internal yellow seal.

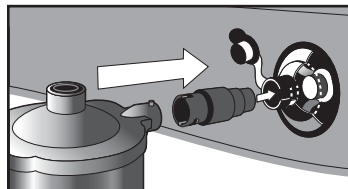


2. Attach adapter nozzle to inflation end of pump. Insert pump and turn on.

Note: The pump may look different from yours. It is for illustration purposes only.

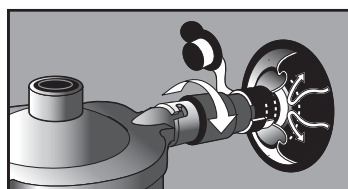


3. When fully inflated, seal valve by pushing in with pump nozzle. This will seal the internal yellow stopper and keep air from escaping while closing cap. Gently twist adapter sleeve to right while backing pump out of valve.

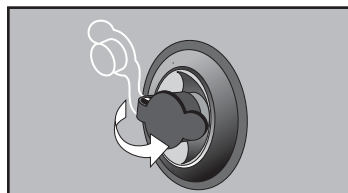

4. Fully remove pump and close external cap. Valve should appear depressed into itself.

Deflation



1. Remove adapter nozzle from inflation end and attach to deflation side of pump. Repeat same steps as inflation. This will draw the air out quickly.

Other Valves

Works with standard wide opening and boston style valves.