

FEDDERS®


Air Conditioner Catalog



Living Space



Working Space

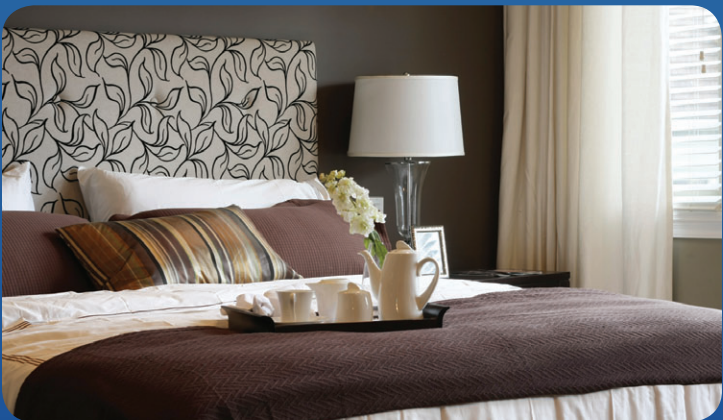

Quiet Space

Features and Benefits

Sizing

1. Measure your room dimensions. Length x Width Square Feet.



2. Verify the size of your window opening.



3. Check the plug type and electrical requirements.



4. Choose recommended BTU size from the chart below.

BTU Size Too Large

An air conditioner that has a higher BTU rating than the room size requires will tend to cycle off too quickly. The unit will not properly remove the humidity from the air.

BTU Size Too Small

An air conditioner that has a lower BTU rating than the room size requires will run continuously. The unit will not adequately cool the room.

Room Size	Square Footage	Recommended BTU range
10'x15'	150	up to 5,400
10'x20'	200	6,000
17'x20'	340	8,000
20'x20'	400	9,000
18'x25'	450	10,000
22'x25'	550	12,000
25'x30'	750	14,500
25'x34'	850	16,000
25'x40'	1,000	18,000
35'x40'	1,400	24,000
38'x40'	1,520	28,500
40'x40'	1,600	32,000



Electronic Touch Controls

Adjust temperature, fan speed and timer operation with the touch of a button. Convenient digital display shows set temperature (available on most models).



Energy Star labeled air conditioners are more energy efficient than standard models.



Slide-Out Filter

Removable air filter allows easy cleaning to ensure maximum cooling efficiency.



Expandable Side Panels

Side panels expand for a perfect window fit (on certain models). Fedders air conditioners go from carton to cooling in minutes.




Heat/Cool Models

These models have electric heat for use as a supplemental heat source on cool days.




Auto Restart

In the event of a power failure, unit will automatically resume normal operation when power returns.




Air Exchanger

Exhaust vent removes stale air and odors from the room and circulates fresh air (on most models).



4-Way Air Direction

Adjustable front louvers (on most models) let you direct the airflow both horizontally and vertically, providing uniform cooling.



Remote Control

Full-featured remote controls temperature, fan speed, mode and timer operations from anywhere in the room.



Ultra-Accurate Thermostat

Provides accurate control of room temperature to within 1.5°F.



Slide-Out Chassis

Two-piece design provides easy installation. Simply mount the lightweight cabinet, then slide in the modular chassis (on certain models).


The figures listed are estimates based on average room conditions in a moderate climate. Some exceptions are: Kitchens – Add 4,000 BTU cooling capacity to the recommended size. High Ceilings/Unusual Floor Plans – Increase BTU recommendation by 10%. Warmer Climates – May require 10-20% additional BTUs per room over amount listed.



5,000-6,000 BTUs

Features:

- Lightweight, compact design for easy handling and installation
- Electronic controls with full-featured remote
 - 3 cooling and 3 fan speeds
 - 24-hour on/off timer
 - Auto cool mode
 - Sleep mode
- 2-way adjustable air direction
- Built-in auto restart function
- Filter check indicator
- Slide-out, washable air filter for easy cleaning
- Expandable side panels for a perfect window fit
- Corrosion-resistant galvanized steel cabinet




8,000-10,000 BTUs

Features:


- Window installation
- Electronic controls with full-featured remote
 - 3 cooling and 3 fan speeds
 - 24-hour on/off timer
 - Auto cool mode
 - Energy Save mode
 - Sleep mode
- 4-way adjustable air direction
- Built-in auto restart function
- Filter check indicator
- Slide-out, washable air filter for easy cleaning
- Expandable side panels for a perfect window fit
- Exhaust vent removes stale air and odors
- Corrosion-resistant galvanized steel cabinet
- Ultra-quiet operation
- Unique low height fits smaller windows



8,000 BTU



10,000 BTU



Room Air Conditioners





8,000-18,000 BTUs

Features:

- Window or through-the-wall installation
- Electronic controls with full-featured remote
 - 3 cooling and fan speeds
 - 24-hour on/off timer
 - Auto cool mode
 - Energy Save mode
 - Sleep mode
- 4-way adjustable air direction
- Built-in auto restart function
- Filter check indicator
- Quick-access, washable air filter for easy cleaning
- Expandable side panels for a perfect window fit
- Slide-out chassis for easy installation
- Compact size fits 24" windows
- Exhaust vent removes stale air and odors
- Corrosion-resistant galvanized steel cabinet
- Ultra-quiet operation
- Large capacity 115V model

8,000-12,000 BTU


15,000-18,000 BTU



24,000 BTUs

Features:

- Window or through-the-wall installation
- Electronic controls with full-featured remote
 - 3 cooling and fan speeds
 - 24-hour on/off timer
 - Auto cool mode
 - Energy Save mode
 - Sleep mode
- 4-way adjustable air direction
- Built-in auto restart function
- Filter check indicator
- Slide-out, washable air filter for easy cleaning
- Slide-out chassis for easy installation
- Exhaust vent removes stale air and odors
- Corrosion-resistant galvanized steel cabinet
- Ultra-quiet operation



Through-the-Wall Room Air Conditioners


FEDDERS®

8,000-14,000 BTUs



Features:

- Through-the-wall installation
- Electronic controls with full-featured remote
 - 3 cooling and 3 fan speeds
 - 24-hour on/off timer
 - Auto cool mode
 - Sleep mode
 - 4-way adjustable air direction
- Built-in auto restart function
- Filter check indicator
- Slide-out, washable air filter for easy cleaning
- Exhaust vent removes stale air and odors
- Corrosion-resistant galvanized steel cabinet
- Trim Frame kit included for all sleeve sizes.

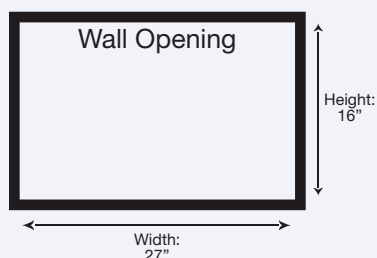

Wall Sleeves



FITS COMPETITIVE SLEEVES

	MANUFACTURER	SLEEVE	WIDTH	DEPTH	HEIGHT
NARROW TRIM FRAME	FRIGIDAIRE		25 ⁷ / ₈ "	16 ⁷ / ₈ "/22"	15 ⁷ / ₈ "
	GE/HOTPOINT		26"	16 ¹ / ₈ "	15 ⁵ / ₈ "
	WHIRLPOOL	SHALLOW	25 ¹ / ₂ "	19"	15 ⁵ / ₈ "
	WHIRLPOOL	DEEP	25 ¹ / ₂ "	22 ⁹ / ₁₆ "	15 ⁵ / ₈ "
	SEARS	SHALLOW	25 ¹ / ₂ "	19"	15 ⁵ / ₈ "
	SEARS	DEEP	25 ¹ / ₂ "	22 ⁹ / ₁₆ "	15 ⁵ / ₈ "
	EMERSON QUIET KOOL		26 ³ / ₄ "	15"	15 ³ / ₄ "
	LG		25 ¹ / ₈ "	16 ²³ / ₃₂ "	16 ¹ / ₃₂ "
WIDE TRIM FRAME	FEDDERS "A" CHASSIS	SHALLOW	27"	16 ³ / ₄ "	16 ³ / ₄ "
	FEDDERS "B" CHASSIS	DEEP	27"	19 ³ / ₄ "	16 ³ / ₄ "
	FRIEDRICH		27"	16 ³ / ₄ "	16 ³ / ₄ "
	WELBILT		27 ³ / ₈ "	15 ³ / ₄ "	16"

Wall Sleeves (Sold separately)

Fedders Wall Sleeves (A70052A) include front and rear covers, plus a rear grille. Replacement parts are available by calling Customer Service at (866) 829-2440.

Sleeve dimensions:

25 ⁷/₈" W x 16 ³/₄" D x 15 ¹/₂" H


Through-the-Wall Room Air Conditioners

9,200-11,800 BTUs




Features:

- Through-the-wall installation
- Electronic controls with full-featured remote
 - 3 cooling and fan speeds
 - 24-hour on/off timer
 - Energy save mode
 - Sleep mode
 - Auto restart
- Filter check indicator
- Slide out filter for easy cleaning
- Exhaust vent removes stale air and odors
- Fits Fedders A & B sleeves (Sold separately)

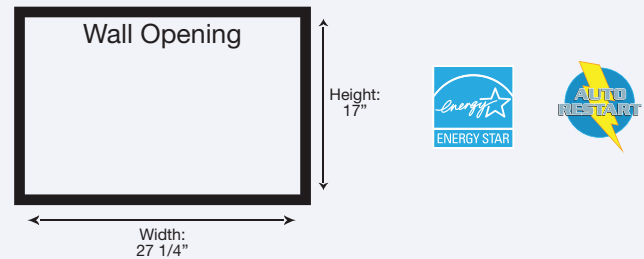

Wall Sleeves

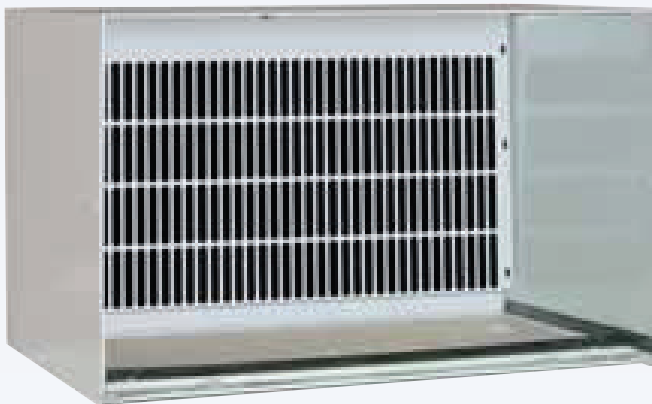

Features:

- All metal construction for durability and long life. Fedders sleeves include front and rear covers plus rear grille.
- #BSA000C: Wall sleeve for "A" chassis (27"W x 16 3/4"D x 16 3/4"H)
- #BSB000C: Wall sleeve for "B" chassis (27"W x 19 3/4"D x 16 3/4"H)

Portable Room Air Conditioner

FEDDERS®



9,000-12,000 BTUs

Features:

- Quiet operation
- No permanent installation required
- Electronic controls with full-featured remote
 - 3 cooling and 3 fan speeds plus dehumidify mode
 - Sleep mode
 - 24-hour timer
- 40 pint/day dehumidifier capacity
- Built-in auto restart function
- Filter check indicator
- Washable air filter for easy cleaning
- No water bucket to empty
- Includes adjustable window adapter and flexible vent hose
- Side hand-holds and bottom casters for easy portability
- Dual hose model adds second vent hose that uses outdoor air in the cooling process



COOLS & DEHUMIDIFIES



Electronic Controls

Convenient top-mounted controls let you adjust fan speed, mode, temperature and timer operations. Digital display shows target or current temperature.



Washable Air Filter

Removable air filter slides out for easy cleaning to ensure maximum cooling efficiency.




Adapter adjusts to fit windows from 22" to 42" wide, 6 1/2" high. Flexible vent hose (4') locks in to blow hot air outside. Dual hose model adds a second vent hose that also uses outdoor air in the cooling process.



Ductless Split Air Conditioners

9,000-24,000 BTUs Heat Pump

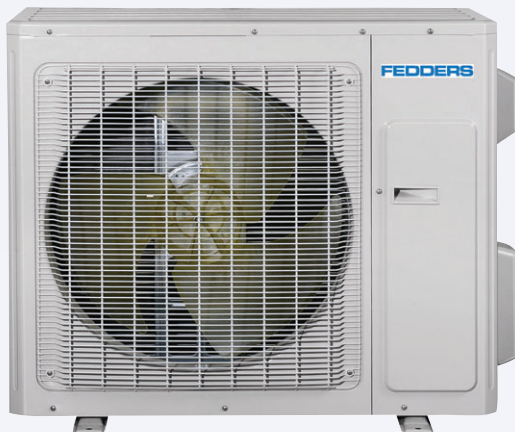

Features:

- Inverter technology
- Energy Star
- Whisper-quiet operation
- Electronic controls with remote
- 24-hour programmable timer
- 3 cooling & 3 fan speeds with full-function LCD remote
- Oscillating or stationary air direction
- Dehumidifying mode
- Auto Restart
- Dry anti-mold control design
- Healthy filters (photo catalytic, active carbon static fiber)
- Quick-access, washable air filter
- Intelligent preheating
- Corrosion resistant cabinet
- Requires no window space for installation

Residential applications:

- Room additions
- Renovations
- family rooms
- Sunrooms
- Wine Cellars
- Garages/workshops.

Commercial Applications:

- Computer/server rooms
- Retail space
- Areas without exterior wall access
- Restaurants
- warehouse/office space

Inverter technology


Inverter technology varies the speed of the compressor, condenser and indoor fan eliminating the constant start up/shut down that standard systems require to maintain the set temperature. Inverter systems reach and maintain set temperature faster while reducing energy costs.



Product Specifications – Fedders Ductless Split Heat Pump

Model Number	9K Btu/h	12K Btu/h	18K Btu/h	24K Btu/h
Indoor Unit	FESI-HHD009-H15D	FESI-HHD012-H15D	FESI-HHD018-H12D	FESI-HHD024-H12D
Outdoor Unit	FEAU-YHD009-H15D	FEAU-YHD012-H15D	FEAU-YHD018-H12D	FEAU-YHD024-H12D
Voltage/Phase/Frequency	115V / 1Ph / 60 Hz	115V / 1Ph / 60 Hz	208-230V / 1Ph / 60 Hz	208-230V / 1Ph / 60 Hz
Frequency Cooling (Hz)	15~70	15~80	15~70	15~80
Frequency Heating (Hz)	15~63	15~75	15~100	15~100
Performance Data	9K Btu/h	12K Btu/h	18K Btu/h	24K Btu/h
Cooling Capacity (Btu/H) (Standard)	9,000	12,000	18,000	21,500
Cooling Capacity Range (Btu/H)	4,435~10,600	4,500~14,000	6,000~22,350	9,600~25,000
Heating Capacity (Btu/H) (Standard)	9,500	13,000	25,000	26,000
Heating Capacity Range (Btu/H)	3,200~11,100	3,250~14,500	4,100~25,000	4,300~26,000
SEER/HSPF	22.8 / 9.8	20.6 / 9.6	18.0 / 8.8	18.0 / 8.8
EER / C.O.P	13.6 / 13.6	11.9 / 10.9	11.9 / 9.2	11.9 / 9.5
Cooling Amps/Watts (High)	14.0 / 1,050.0	14.0 / 1,000.0	12.0 / 2,650.0	12.0 / 2,650.0
Heating Amps/Watts (High)	15.0 / 1,100.0	15.0 / 1,500.0	12.6 / 2,750.0	12.5 / 2,750.0
Max Fuse/Breaker (A) Indoor/Outdoor	15 / 25	15 / 25	15 / 25	15 / 25
Moisture Removal (Liter/H)	0.8	1.2	2.0	2.5
Air Circulation Range (CFM)	218~330	218~300	324~500	353~559
Indoor Sound Level Range (dba)	36~44	36~46	45~56	45~58
Refrigerant System	9K Btu/h	12K Btu/h	18K Btu/h	24K Btu/h
Refrigerant Type	R-410A	R-410A	R-410A	R-410A
Refrigerant Charge (oz)	42.3	45.9	51.1	63.5
Operating Range (°F) - Cooling	41~115	41~115	41~115	41~115
Operating Range (°F) - Heating	5~86	5~86	5~86	5~86
Connection Type	Flare	Flare	Flare	Flare
Liquid Line - OD	1/4"	1/4"	1/4"	1/4"
Suction Line - OD	3/8"	3/8"	1/2"	5/8"
Max Line Length	65.6'	65.6'	98.4'	98.4'
Max Height Difference	32.8'	32.8'	49.2'	49.2'
Dimensions and Weights	9K Btu/h	12K Btu/h	18K Btu/h	24K Btu/h
Indoor Unit Dimensions W" x H" x D"	33.27 x 10.83 x 7.09	33.27 x 10.83 x 7.09	37.01 x 11.73 x 7.87	39.69 x 12.40 x 8.62
Indoor Shipping Dimensions W" x H" x D"	36.02 x 13.98 x 10.04	36.02 x 13.98 x 10.04	39.76 x 14.96 x 11.22	42.24 x 15.55 x 12.32
Indoor Net Weight/Shipping Weight (lbs)	24/31	24/31	29/37	35/46
Outdoor Unit Dimensions W" x H" x D"	33.39 x 12.60 x 21.26	33.39 x 12.60 x 21.26	35.04 x 27.56 x 13.39	36.22 x 31.10 x 14.57
Outdoor Shipping Dimensions W" x H" x D"	34.57 x 14.17 x 22.83	34.57 x 14.17 x 22.83	40.55 x 18.11 x 28.94	41.93 x 19.09 x 33.07
Outdoor Net Weight/Shipping Weight (lbs)	79/90	88/97	110/121	119/132

Dehumidifiers

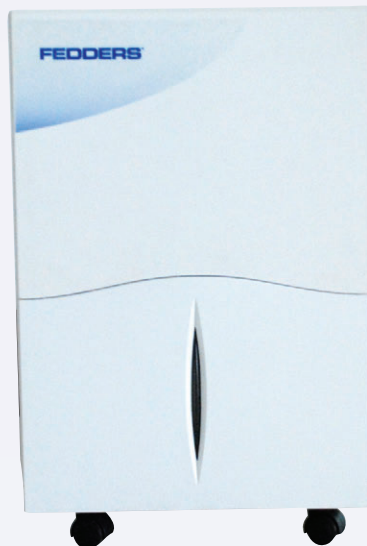

30-pint, 50-pint and 70-pint

Features:

- Energy Star
- R410A refrigerant
- Low Temperature Operation down to 41°F
- Garden Hose Connector for Continuous Drainage
- 3 Fan Speeds & Auto Shut-off Timer
- Digital Humidistat: Set Humidity from 35%-80%
- Continuous Mode: Dehumidifies until Bucket Full
- Loss of Power Protection with Auto-restart
- Water Level Indicator & Bucket Full Auto Shut-off
- Change Bucket and Filter Indicators



Product Specifications

Airwell Model		MAH 030	MAH 050	MAH 070
Rated Voltage		115V~	115V~	115V~
Rated Frequency		60Hz	60Hz	60Hz
Dehumidifying Capacity (PINTS/D)		30	50	70
Rated input Watt		400	548	765
Rated current Amp		4.1	5.2	7.3
Air Flow Volume (CFM) (H/M/L)		110 / 100 / 880	205 / 175 / 150	205 / 175 / 150
Fan Motor Speed (rpm) (H/M/L)		1160 / 1060 / 960	1000 / 900 / 800	1000 / 900 / 800
Output of Fan Motor (W)		25	20	20
Operation Temperature (F)		41~95	41~95	41~95
Bucket Capacity (L)		5.7 / 6.8	7 / 8.3	7 / 8.3
Dimension (W/H/D) (inches)		13.5 / 20.6 / 10.6	15.1 / 24.1 / 11.7	15.1 / 24.1 / 11.7
Dimension of Package (W/H/D) (inches)		15.6 / 21.9 / 12.4	17.3 / 25.4 / 13.6	17.3 / 25.4 / 13.6
Net Weight / Gross Weight (lbs)		34 / 37	44 / 47	44 / 48.5
Refrigerant Charge (lbs)		R410a / 0.48	R410A / 0.55	R410A / 0.48
Electrical datas	Plug Type	Normal UL	Normal UL	Normal UL
	Power supply side (Indoor / Outdoor)	Indoor	Indoor	Indoor
	Power cable section	AWG 18	AWG 18	AWG 16
	Fuse rating am (A)	10A	10A	13A

Room Air Conditioner Specifications

PERFORMANCE									ELECTRICAL REQUIREMENTS						FEATURES					CABINET SIZE			WINDOW OPENING		WEIGHT		
Model	Energy Star	Cooling Area (see note 1)	BTU Cooling	BTU Heating	E.E.R.	Pints Per Hour	Room Air Delivery (CFM max.)	Voltage	Amps Cooling	Amps Heating	Watts Cooling	Watts Heating	Plug Cap. Amps	Receptacle	Air Exchanger	Air Direction	Fan Speeds	Auto Restart	Slide-Out Chassis	Additional Features	Width	Depth*	Height	Width (Min-Max)	Height (Min)	Net/Ship Weight (lbs)	
WINDOW AIR CONDITIONERS																											
AZ3R05F2A	N	150	5000	—	9.7	0.8	118	115	4.8	—	515	—	10	A	N	2 Way	2	N	N	M	16 ¼	13 ¾	12 ⅝	16 ½ - 36	13	34.2/39.7	
AZ6R05F2A	N	150	5000	—	9.7	0.8	118	115	4.8	—	515	—	10	A	N	2 Way	3	Y	N	*	16 ¼	13 ¾	12 ⅝	16 ½ - 36	13	34.2/39.7	
AZ7R05F2A	Y	150	5200	—	10.7	1.1	147	115	4.5	—	485	—	10	A	N	2 Way	3	Y	N	*	16 ¼	15 ¾	12 ⅝	16 ½ - 36	13	38.6/44.1	
AZ6R06F2A	N	200	6000	—	9.7	1.3	147	115	6.1	—	620	—	10	A	N	4 Way	3	Y	N	*	16 ¼	15 ¾	12 ⅝	16 ½ - 36	13	39.7/45.2	
AZ7R06F2A	Y	200	6000	—	10.7	1.3	147	115	5.4	—	560	—	10	A	N	4 Way	3	Y	N	*	16 ¼	15 ¾	12 ⅝	16 ½ - 36	13	46.3/52.9	
AZ6R08F2A	N	340	8000	—	9.8	1.7	224	115	7.4	—	815	—	10	A	Y	4 Way	3	Y	N	*	19 ⅞	15 ¾	12 ⅝	21 ⅞ - 36	14	46.3/52.9	
AZ7R08F2A	Y	340	8000	—	10.8	1.7	224	115	7.0	—	740	—	13	A	Y	4 Way	3	Y	N	*	19 ⅞	15 ¾	12 ⅝	19 ¾ - 36	14	59.5/66.1	
AZ6R10F2A	N	450	10000	—	9.8	2.4	295	115	9.4	—	1020	—	13	A	Y	4 Way	3	Y	N	*	19 ⅞	19	14 ¾	22 ⅞ - 36	14 ¼	58.4/65	
AZ7R10F2A	Y	450	10000	—	10.8	2.7	295	115	8.8	—	930	—	15	A	Y	4 Way	3	Y	N	*	19 ⅞	20 ⅞	14 ¾	19 ⅞ - 36	14 ¼	82.7/91.5	
AZ7Y12F2A	Y	550	12000	—	10.8	2	280	115	9.7	—	1110	—	15	A	Y	4 Way	3	Y	Y	*	22 ⅝	21 ⅞	15 ¾	22 ⅞ - 36	16 ¼	82.7/90.4	
AZ7Y12F7A	Y	550	12000	—	10.8	2.2	280	230	4.9	—	1130	—	15	B	Y	4 Way	3	Y	Y	*	22 ⅝	21 ⅞	15 ¾	22 ⅞ - 36	16 ¼	99.2/111.4	
AZ7Y15F2A	Y	800	15000	—	10.7	3.8	460	115	12.0	—	1410	—	15	A	Y	4 Way	3	Y	Y	*	23 ⅝	25 ½	17 ¾	23 ⅞ - 40 ½	18 ½	99.2/111.4	
AZ7Y18F7A	Y	1000	18000	—	10.7	5.5	460	230	7.7	—	1730	—	15	B	Y	4 Way	3	Y	Y	*	23 ⅝	25 ½	17 ¾	23 ⅞ - 40 ½	18 ½	105/119	
AZ7R24E7A	Y	1400	24000	—	9.4	8	530	230	11.6	—	2660	—	20	C	Y	4 Way	3	Y	Y	*	26 ⅞	26 ⅞	18 ½	26 ⅞ - 42	19	122.3/136.6	
HEAT/COOL WINDOW AIR CONDITIONERS																											
AZEY08F2A	Y	340	8000	3500	10.8	1.5	280	115	6.6	8.9	740	1050	13	A	Y	4 Way	3	Y	Y	*	22 ⅝	21 ⅞	15 ¾	22 ⅞ - 36	16 ¼	73.2/80.9	
AZEY12F7A	Y	550	12000	11000	10.8	2.2	280	230	4.9	15	1130	3500	20	C	Y	4 Way	3	Y	Y	*	22 ⅝	21 ⅞	15 ¾	22 ⅞ - 36	16 ¼	85/92.5	
AZEY18F7A	Y	1000	18000	16000	9.7	5.5	460	230	8.4	22	1900	4900	25	D	Y	4 Way	3	Y	Y	*	23 ⅝	25 ½	17 ¾	23 ⅞ - 40 ½	18 ½	105/119	
AZEY18F7B	Y	1000	18000	10200	9.7	5.5	460	230	8.4	15	1900	3500	20	C	Y	4 Way	3	Y	Y	*	23 ⅝	25 ½	17 ¾	23 ⅞ - 40 ½	18 ½	105/119	
AZER24E7A	Y	1400	24000	16000	9.4	8	530	230	11.6	22.5		4900	25	D	Y	4 Way	3	Y	Y	*	26 ⅞	26 ⅞	18 ½	26 ⅞ - 42	19	128/142.2	
THROUGH-THE-WALL AIR CONDITIONERS																											
AZ7T08W2A	Y	340	8000	—	9.4	1.8	283	115	8.0	—	850	—	10	A	Y	4 Way	3	Y	Y	**	24 ⅞	20 ¼	14 ½	N/A	N/A	59.5/70.6	
AZ7T10W2A	Y	450	10000	—	9.4	2.6	283	115	9.8	—	1060	—	15	A	Y	4 Way	3	Y	Y	**	24 ⅞	20 ¼	14 ½	N/A	N/A	65/75	
AZ7T10W7A	Y	450	10000	—	9.4	2.8	295	230	5.1	—	1060	—	15	B	Y	4 Way	3	Y	Y	**	24 ⅞	20 ¼	14 ½	N/A	N/A	60.6/70.6	
AZ7T12W2A	Y	550	12000	—	9.4	3.3	295	115	11.1	—	1240	—	15	A	Y	4 Way	3	Y	Y	**	24 ⅞	20 ¼	14 ½	N/A	N/A	67.3/76.1	
AZ7T12W7A	Y	550	12000	—	9.4	3.5	295	230	6.3	—	1270	—	15	B	Y	4 Way	3	Y	Y	**	24 ⅞	20 ¼	14 ½	N/A	N/A	68.4/78.3	
AZET12W7A	Y	550	12000	10600	9.4	3.5	295	230	6.0	15	1330	3450	20	C	Y	4 Way	3	Y	Y	**	24 ⅞	20 ¼	14 ½	N/A	N/A	72.8/82.7	
AZ6T14W7A	N	700	14000	—	9.0	4.3	318	230	7.4	—	1550	—	20	C	Y	4 Way	3	Y	Y	**	24 ⅞	20 ¼	14 ½	N/A	N/A	68.4/79.4	
THROUGH-THE WALL AIR CONDITIONERS FOR A/B SLEEVES																											
AZ7A09W2A	Y	400	9200	—	9.8	2.4	280	115	8.6	—	940	—	15	A	Y	4 Way	3	Y	Y	**	26	16 ⅞	15 ⅝	N/A	N/A	84/97	
AZ7A12W2A	Y	550	11800	—	9.4	3.2	280	115	11.6	—	1260	—	15	A	Y	4 Way	3	Y	Y	**	26	16 ⅞	15 ⅝	N/A	N/A	84/97	
AZ7A12W7A	Y	550	11800	—	9.8	3.2	280	230	5.6	—	1200	—	13	B	Y	4 Way	3	Y	Y	**	26	16 ⅞	15 ⅝	N/A	N/A	84/97	
PORTABLE AIR CONDITIONERS																											
AZ6P09S2A	N	400	9000	—	8.8	3	185	115	9.5	—	1080	—	15	A	N	1 Way	3	Y	—	***	17 ⅞	15 ½	31 ⅞	N/A	N/A	66/75	
AZ6P12D2A	N	550	12000	—	10	4	235	115	10.8	—	1300	—	15	A	N	2 Way	3	Y	—	****	18 ⅞	18 ⅞	36 ⅝	N/A	N/A	79/94	
AZHP12D2A	N	550	12000	11000	8.7	4	235	115	10.8	11	1300	1250	15	A	N	2 Way	3	Y	—	****	18 ⅞	18 ⅞	36 ⅝	N/A	N/A	79/94	

Note 1 The square feet of cooling area listed is based on average room conditions in a moderate climate. Some exceptions are kitchens (add 4,000 BTU), high ceilings or unusual floor plans (increase 10%), warmer climates (increase 10-20%).

ADDITIONAL FEATURES

M	Mechanical control, no remote control.
*	Full function remote control, 24 hour timer on-off, Sleep mode, Energy Saver mode, LED display, C/F display change, Filter check (250 hours), Auto-restart function, Operation Mode: Cool/Fan/Dry/Auto, Easy mount window kit
**	Full function remote control, 24 hour timer on-off, Sleep mode, Energy Saver mode, LED display, C/F display change, Auto-restart function, Operation Mode: Cool/Fan
***	Simple remote control, 12 hour timer on-off, LED display, Auto-restart
****	Simple remote control, 24 hour timer on-off, LCD display, Auto-restart

Receptacle Key



Models and specifications are subject to change without notice. All models have electronic controls with remote control unless noted otherwise. 230v models are 208/230 volt and specifications listed are at 230v.



www.fedders.com

Airwell-Fedders North America, Inc.
2 Centre Drive, Monroe Township, NJ 08831
(866) 829-2440