



Mutoh America Inc.
2602 South 47th Street, Suite 102
Phoenix, Arizona 85034 USA
Tel. (480) 968-7772
Fax (480) 968-7990

TECHNICAL INFORMATION BULLETIN

Release date: 5/10/12

Bulletin # 2012/115

High Capacity Ink Pack Adapter Use

Dear Mutoh Customer,

Please follow below guidelines for safe and problem free 1000ml High Capacity Ink Pack Adapter Use:

Solvent resistant latex gloves are highly recommended to prevent ink/skin contact

1. Place adapters on a clean, flat surface
2. Carefully peel off included ink color stickers and place on rear of adapter just above orange release lever – one for each adapter



3. Remove smart card from protective plastic bag taking care to avoid contact with the copper read/write section of the card (natural skin oils can prevent good contact with internal printer read/write connections)
4. Insert smart card into adapter with writing face up and arrow pointing to the right as shown below – ensure card is fully seated




***** NOTE *****

- **Do not remove 1000ml Ink Pack from printer once installed – Possibility of ink leakage occurs**
- **Do not remove adapter pack until ink pack needs replacement – Possibility of ink leakage occurs**
- **Refer to Owner's Manual before using**

5. Depress orange release lever and insert 1000ml ink pack into adaptor – ensure ink pack is fully seated to prevent ink leakage



6. Insert 1000ml ink pack adaptor into the printer using same color configuration slots as indicated on printer. **Be sure to fully seat the adaptor or Broken chip errors may occur.**
7. Every new cartridge will come with a new rubber puncture seal. Please replace the rubber seal every time a new cartridge is used
8. To replace the rubber seal, push the tubing out of the retention slot using a small screwdriver as shown below
- 9.

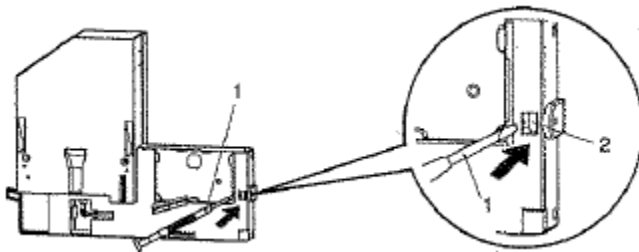

10. Using same screwdriver, gently pry old rubber seal and replace with a new one

