


ASSEMBLY INSTRUCTIONS

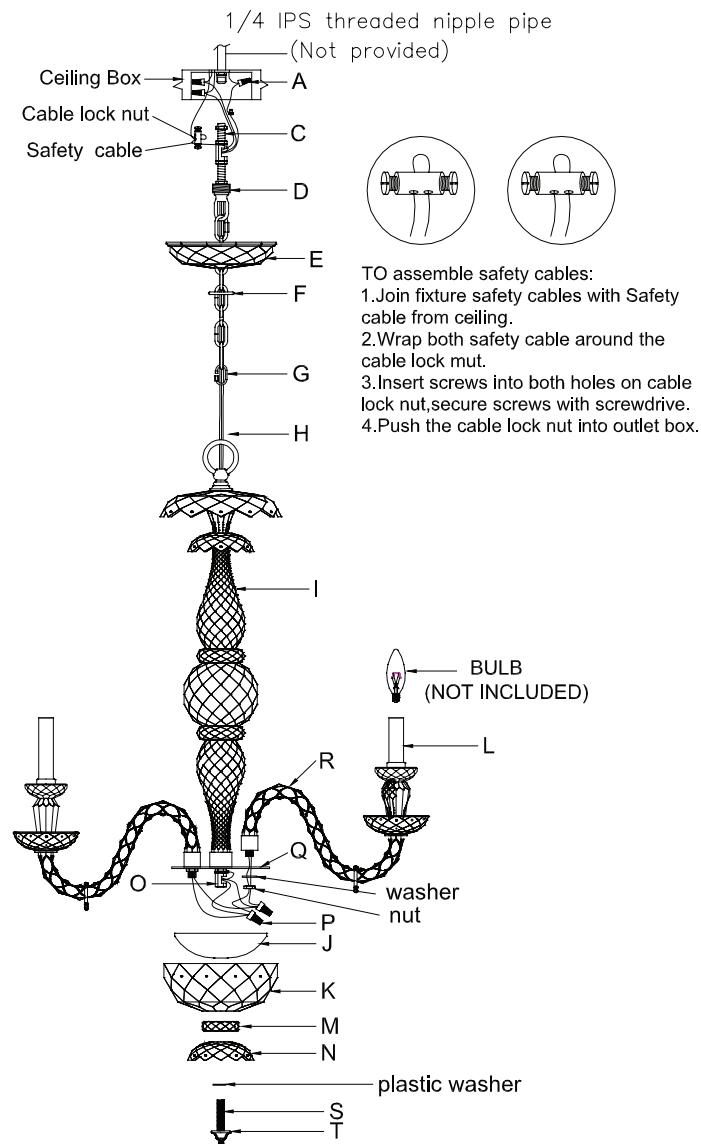

Daniela 4-Light Chandelier

Item # RL5004

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING *** SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL.


ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

1. Install the threaded nipple (C) with hickey and nut into the ceiling box. You must provide a 1/4 IPS threaded nipple which will go through the top of ceiling box and through a structural member of building.
2. Attach ceiling loop (D) to the threaded nipple (C).
3. Using the dimensions of the fixture as a guide, shorten the chain (G) as needed using a pair of chain pliers.
4. Take into consideration that you will use the chain end link to mount the chandelier once you have removed the excess chain.
5. Unscrew the threaded collar on the chain end link. Attach the chain (G) to the ceiling loop (D). Close the threaded collar to secure the chain.
6. Unscrew the threaded collar on the other chain end link. Raise fixture body and attach chain end link to the top of decorative part (H). Close the threaded collar to secure the fixture body.
7. Gently remove a glass arm from the package.
8. Remove the lock nut and spring washer from the nipple at the end of the arm.
9. Slip the wires through the hole in the center plate.
10. Gently set the arm into place and secure using the spring washer and lock nut.
11. It is very important not to use any leverage on the Glass arm to tighten the lock nut. Hold only the metal Ferrule at the base of the arm near the center metal plate.
12. Repeat step 7-10 for each arm. Check that the arms are spaced evenly before final tightening.
13. Locate the power supply wires which come from the center plate hickey.



R A L P H L A U R E N

ASSEMBLY INSTRUCTIONS

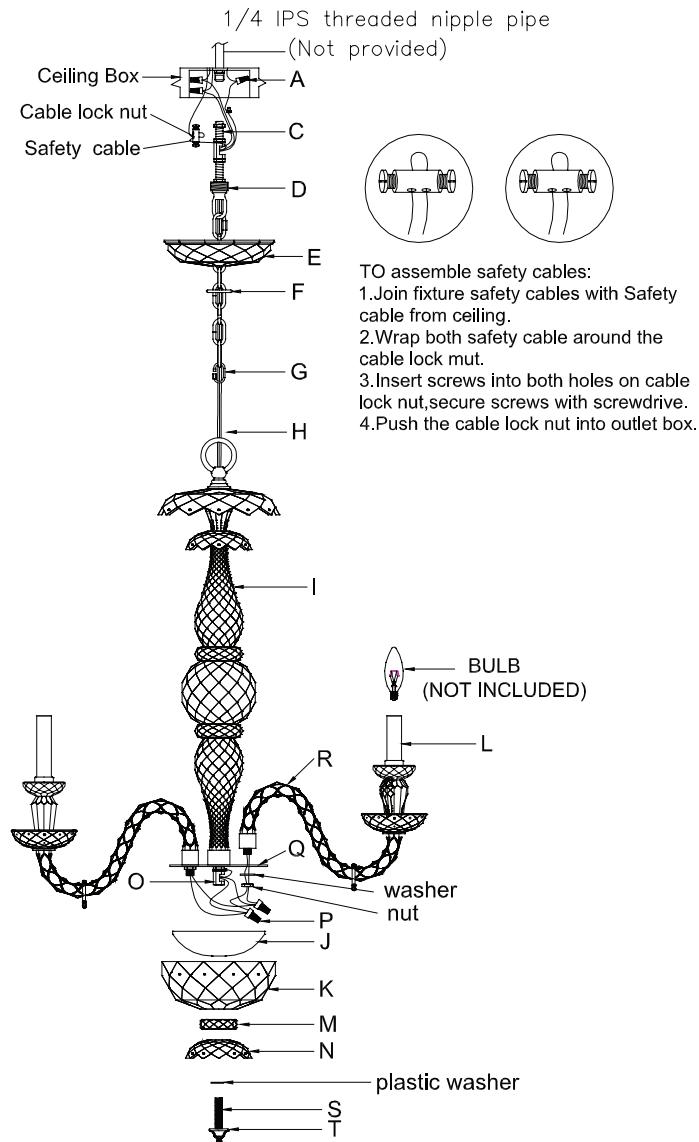

Daniela 4-Light Chandelier

Item # RL5004

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING * SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL.


ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

14. Attach three of the wires from the arms with Black Markings to one of the jumper wires provided with Black Markings. Secure with the wire nut provided. Attach the other three wires from the arms with Black Markings to the other jumper wire provided with Black Markings. Secure with the wire nut provided. Attach the two jumper wires with Black Markings to the wire from the center plate with Black Markings. Secure with wire nut provided. Wrap electrical tape around all connections inside wire housing.
15. Repeat step 13 wires which have no black markings.
16. Double check that all of your connections are correct.
17. Assemble the metal bowl (J) and glass bowl (K), (M), (N) onto the fixture use thread stem (S) and bottom finial (T) as the profile. Place provided rubber washers between each glass/metal part at bottom assembly.
18. Unwrap the wiring from the top of the fixture body. Weave the power supply cord and the ground wire through the chain (G).
19. When you reach the canopy and ceiling loop, measure the wires 15" inches beyond the length of the canopy and cut. Be certain to leave enough to connect inside the canopy.
20. Loosen the clock collar (F) and let the canopy (E) slip down the chain carefully.
21. Twist the power supply and ground wires together and push through the center hole in the ceiling loop.
22. Connect the Ground (bare) fixture wire with the ground (usually bare) wire from your ceiling box using wire nut (A). If your house does not have ground wire, then attach this wire to the green grounding screw inside of outlet box.
23. Connect the Neutral (ribbed edge, no markings, or white) fixture wire with the Neutral (usually white) wire from your ceiling box using wire nut (A).



R A L P H L A U R E N

ASSEMBLY INSTRUCTIONS

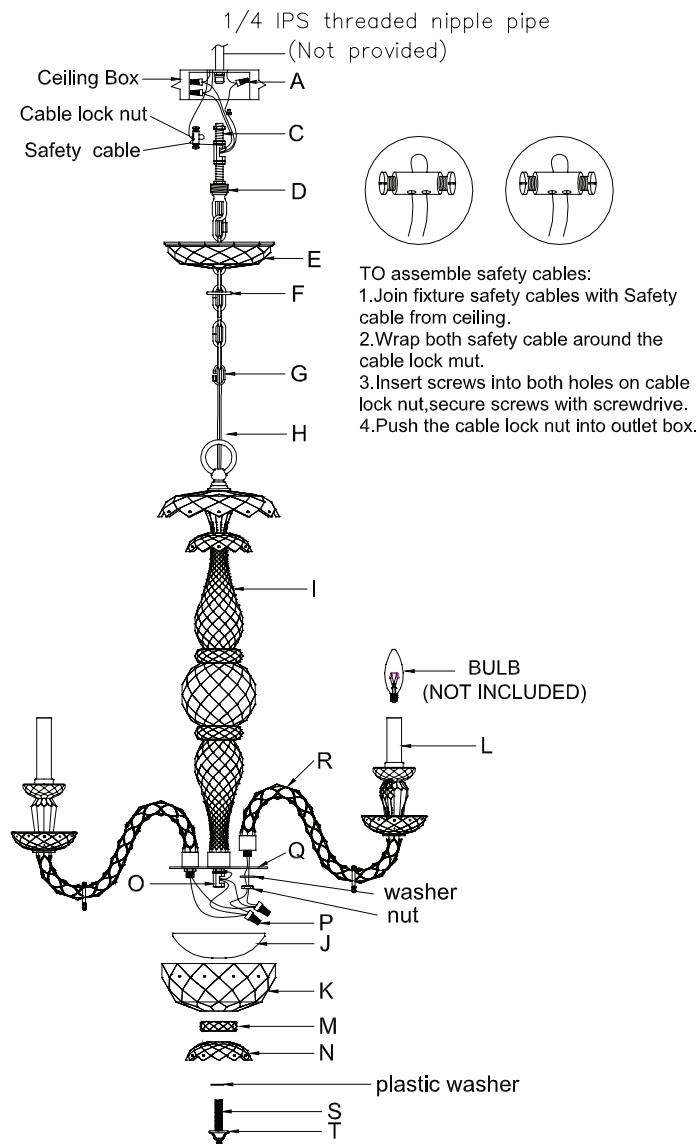

Daniela 4-Light Chandelier

Item # RL5004

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING *** SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL.

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

24. Connect the Neutral (ribbed edge, no markings, or white) fixture wire with the Neutral (usually white) wire from your ceiling box using wire nut (A).
25. Connect the Hot (smooth edge, markings, or black) fixture wire with the Hot (usually black) wire from your outlet box using wire nut (A).
26. Tuck these wire connections neatly into the outlet box.
27. Install the light bulbs (not included) into sockets (L).
28. Please refer crystal drops assembly sheet.



R A L P H L A U R E N

ASSEMBLY INSTRUCTIONS

Daniela 4-Light Chandelier


Item # RL5004

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING *** SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL.

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

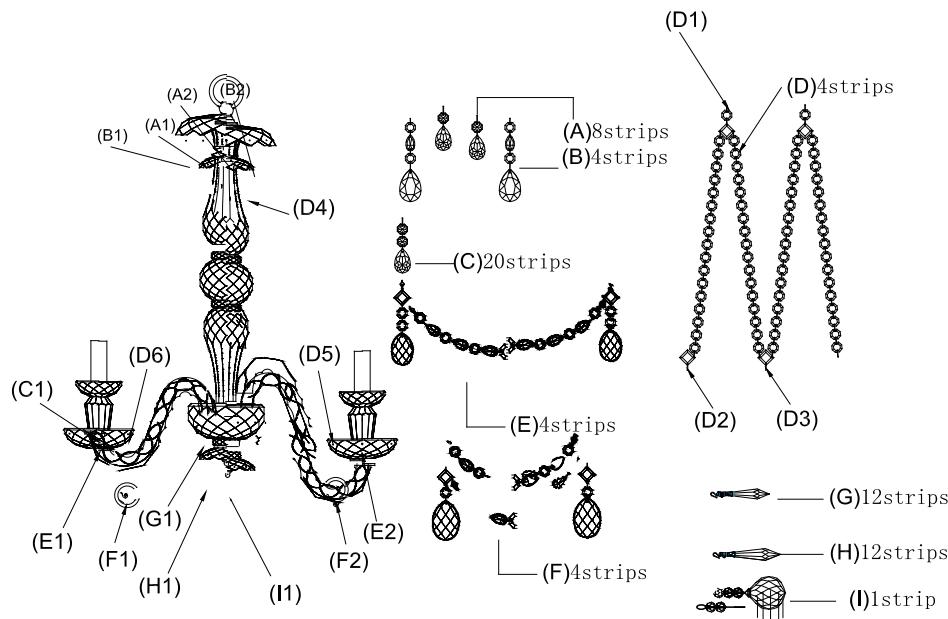

CRYSTAL TRIM SET FOR RL5004

Assemble the entire fixture before you attach any of the crystals. Unpack and lay out all crystals on a clean, soft surface. Please take inventory of any missing crystals. Report any missing and/or damaged crystals to your supplier immediately. Do not install any damaged parts. No claims can be made once installed.

1. Attach the crystal drops (A) on hook (A1) and hook (A2)
2. Attach the crystal drops (B) on hook (B1) and hook (B2)
3. Attach the crystal drops (C) on hook (C1)
4. Attach the hook of crystal drop (D1) on hook (D4)
5. Attach the hook of crystal drop (D2) on hook (D5)
6. Attach the hook of crystal drop (D3) on hook (D6)
7. Attach the crystal drops (E) on hook (E1) and hook (E2)
8. Attach the crystal drops (F) on hook (F1) and hook (F2)
9. Attach the crystal drops (G) on hook (G1)
10. Attach the crystal drops (H) on hook (H1)
11. Attach the crystal drops (I) on hook (I1)



R A L P H L A U R E N