

Merrill, Pastor and Colgan Architects
927 Azalea Lane, Suite B, Vero Beach, Florida
Tel. 772-492-1983, Fax. 772-492-1986
Florida License AA26000612

PROJECT MANUAL VOLUME II

**RESIDENCE FOR THE EZPELETA TRUST
LOTS 16 & 13, BLOCK 46
WINDSOR FLORIDA**

Issued: November 30, 2012

Contract Conditions:

Instructions to Bidders - AIA A-701
General Conditions - AIA A-201, Addendum to General Conditions

Contracts:

Owner-Contractor Agreement AIA A-101,
Certificate of Insurance, Windstorm Proof of Compliance, to be completed by the Contractor
Lien Release Forms, to be completed by the Contractor

Appendices:

- A. Design Pressures – Not Issued
- B. Vendor Contacts
- B. Product Cut Sheets

Merrill, Pastor and Colgan Architects
927 Azalea Lane, Suite B, Vero Beach, Florida
Tel. 772-492-1983, Fax. 772-492-1986
Florida License AA26000612

**RESIDENCE FOR THE EZPELETA TRUST
LOTS 16 & 13, BLOCK 46
WINDSOR FLORIDA**

Issued: November 30, 2012

Appendix B – Vendor Contacts

Artistic Tile Rep:

Joan Poggioli
Architectural Sales
Artistic Tile
38 West 21 Street
New York, NY 10010
212-727-9331 x 1222
joanpoggioli@artistictile.com

AF Supply New York Rep (Davinci) (Additional Reps: Dornbracht, Blanco, Grohe, Speakman, etc.):

Nora Sihabouth

Account Manager, Architecture & Design Division

AF NEW YORK
22 WEST 21st Street, 5 FLOOR
NEW YORK, NY 10010
P 212 497 5208
F 212 497 5108
E noras@afnewyork.com

LV Wood Rep:

WAYNE DICKINSON

LV WOOD
24 West 20th Street
New York City
lvwood.com
wayne@lvwoodfloors.com

t: [212.627.9663](tel:212.627.9663)

TrueForm Concrete Rep:

Nicole Grech

5 Astro Place

Rockaway, NJ 07866

T: 973-983-7500

F: 973-983-7501

Nicole@trueformconcrete.com

www.trueformconcrete.com

Custom Exterior Light Fixture Rep:

JESSICA MORSE

Sales Coordinator

THE URBAN ELECTRIC Co.

2130 N Hobson Ave

N. Charleston, SC 29405

Tel: [843-723-8140](tel:843-723-8140)

Fax: [843-723-8748](tel:843-723-8748)www.urbanelectricco.com



24" Undercounter Combination

Sub-Zero undercounter units simplify life at home by bringing refrigeration anywhere it's needed. Fresh greens in the kitchen island. Ice, soda and snacks in the media room. Chilled mineral water in the master suite. Model UC-24CI features an automatic ice maker. You can order a stainless steel panel, or the unit is ready to be fitted with your custom cabinet panel.



Model UC-24C with overlay panel shown.

FEATURES

- Combination unit provides refrigerator and freezer storage.
- Easy-access, touch control panel with LCD display.
- Temperature range from 34°F to 45°F in refrigerator section and -5°F to 5°F in freezer section.
- Bright interior lighting.
- Adjustable, spill-proof glass shelf.
- Roller-glide wine shelf with natural cherry-wood facing has three-quarter extension for easy access.
- Two-liter bottle storage in door.
- Automatic ice maker provides crescent-shaped ice (UC-24CI).
- Removable clear ice bucket (UC-24CI).
- Automatic defrost.

MODEL OPTIONS

Design/Finish

Overlay or Stainless Steel*

Automatic Ice Maker

UC-24C

UC-24CI

Overlay or Stainless Steel*

*Stainless steel door front panel with handle available only as sales accessory.


INTERIOR FEATURES

- **Refrigerator**
 - Wine Storage Shelf
 - 2 Adjustable Glass Shelves
 - Door Shelf
- **Freezer**
 - Automatic Ice Maker (UC-24CI)
 - Automatic Defrost

ACCESSORIES

- Stainless steel door panel with tubular or pro handle.
- Stainless steel tubular and pro handles.
- Door lock.

Accessories are available through your Sub-Zero dealer. For local dealer information, visit the find a showroom section of our website, subzero.com.



Wine storage shelf.




Clear ice bucket.





24" Undercounter Combination

OVERALL DIMENSIONS

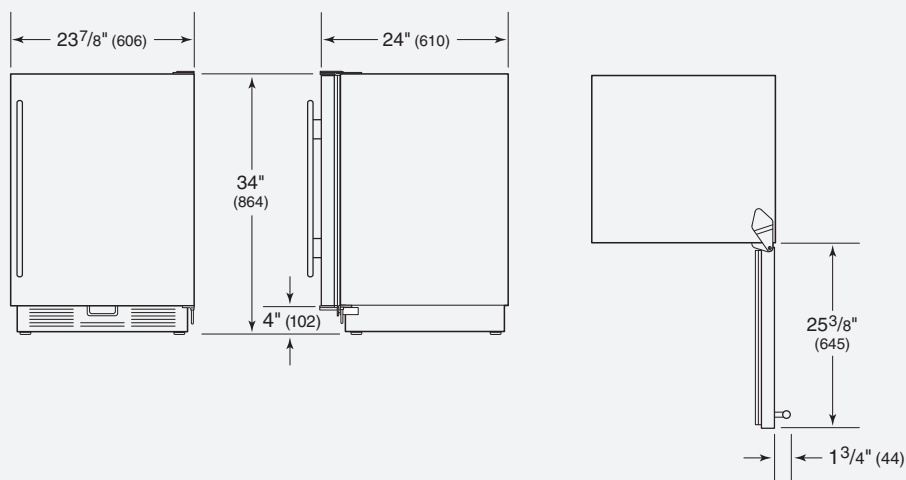

Unit dimensions may vary by $\pm 1/8$ ".

SPECIFICATIONS

Overall Width	23 7/8"
Overall Height	34"
Overall Depth	24"
Door Clearance	25 3/8"
Refrigerator Capacity	3.6 cu ft
Wine Storage Capacity	up to 8 Bottles (750 ml)
Freezer Capacity	1.1 cu ft
Opening Width	24"
Opening Height	34 1/2"
Opening Depth	24"
Electrical Requirements	115 V AC, 60 Hz 15 amp dedicated circuit
Plumbing Requirements	1/4" OD copper, braided stainless steel or PEX tubing 20–100 psi
Shipping Weight	130 lbs


INSTALLATION NOTES

Undercounter model UC-24C is available in your choice of the overlay or stainless steel design application. A stainless steel door front panel with tubular or pro handle is available as a sales accessory.


Complete installation specifications, including panel sizes, can be found on our website, subzero.com/specs.

INSTALLATION SPECIFICATIONS


Opening Dimensions

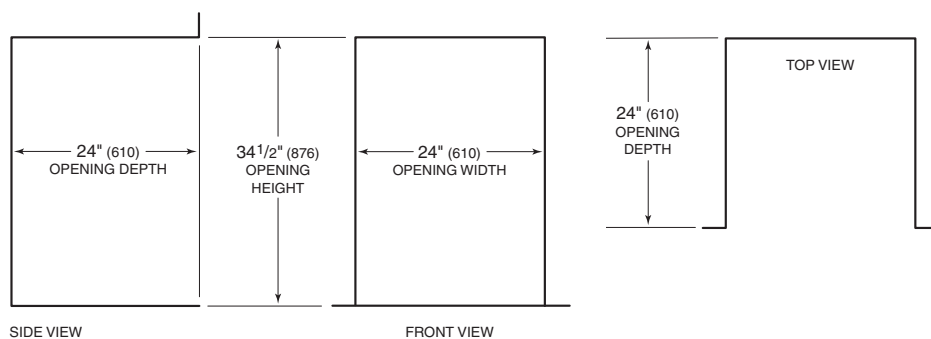

Location of Electrical Supply



Location of Water Supply



Dimensions in parentheses are in millimeters unless otherwise specified.



15" Undercounter Ice Machine

Sub-Zero undercounter units simplify life at home by bringing refrigeration anywhere it's needed. In the kitchen, a high-volume ice machine is a must for entertaining. Model UC-15I ice machine has a storage capacity of up to 26 pounds of ice. You can order a stainless steel panel, or the unit is ready to be fitted with your custom cabinet panel.



FEATURES

- High-volume ice machine—great for entertaining.
- Produces up to 50 lbs of ice per day with large-capacity storage.
- Automatic ice maker provides quality, octagonal-shaped ice.
- Advanced water filtration system.
- Outdoor model produces ice in air temperature up to 100°F.
- Easy-access control.
- Two, four and eight hour delay feature.
- Clean and change filter indicator lights.
- Bin light.
- Ice scoop fits neatly in door.
- Automatic defrost.
- Drain pump (UC-15IP and UC-15IPO).
- Approved for outdoor use from 50°F to 110°F (UC-15IO and UC-15IPO).
- Stainless steel door panel with pro handle to match Wolf outdoor grills.

MODEL OPTIONS

MODEL OPTIONS	UC-15I	UC-15IP	UC-15IO	UC-15IPO
Drain Type	Gravity Drain	Drain Pump	Gravity Drain	Drain Pump
Outdoor Model			•	•

INTERIOR FEATURES

- Ice Machine
- LED Bin Light
- Water Filter
- Ice Scoop

ACCESSORIES

- Stainless steel door panel with tubular or pro handle—15" or 18" width (UC-15I and UC-15IP).
- Stainless steel door panel with pro handle to match Wolf outdoor grills—15" width (UC-15IO and UC-15IPO).
- Stainless steel tubular and pro handles.
- Cleaning and sanitizing solutions (must be ordered with ice machine).
- Replacement water filter.


Accessories are available through your Sub-Zero dealer. For local dealer information, visit the find a showroom section of our website, subzero.com.





15" Undercounter Ice Machine

OVERALL DIMENSIONS

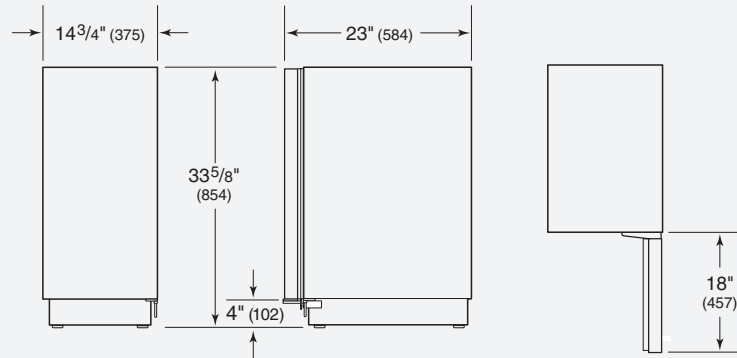

Unit dimensions may vary by $\pm 1/8$ ".
Overall dimensions do not include panels or handles.

SPECIFICATIONS

Overall Width	14 ³ / ₄ "
Overall Height (levelers in)	33 ⁵ / ₈ "
Overall Depth	23"
Minimum Door Clearance	18"
Ice Storage Capacity	26 lbs
Opening Width	15 ¹ / ₄ "
Opening Height	34 ¹ / ₂ "
Opening Depth	24"
Minimum Height Required (levelers in)	33 ⁵ / ₈ "
Electrical Requirements	115 V AC, 60 Hz 15 amp dedicated circuit
Plumbing Requirements	1/4" OD copper, braided stainless steel or PEX tubing 20–80 psi
Shipping Weight	117 lbs

INSTALLATION NOTES


The electrical supply can be located anywhere on the back wall.

The ice machine can be ordered with (models UC-15IP and UC-15IPO) or without (models UC-15I and UC-15IO) a drain pump. Each model has specific plumbing requirements. If you order the unit without a pump, a drain must be installed.




Complete installation specifications, including panel dimensions, can be found on our website, subzero.com/specs.

INSTALLATION SPECIFICATIONS


Gravity Drain Models

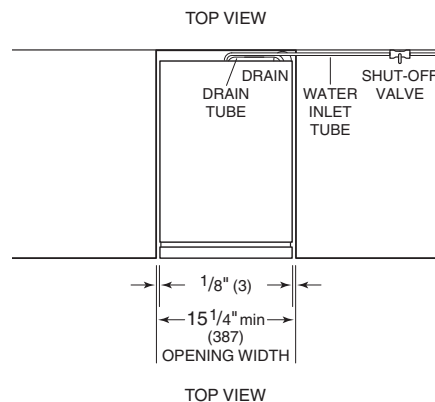


Drain Pump Models

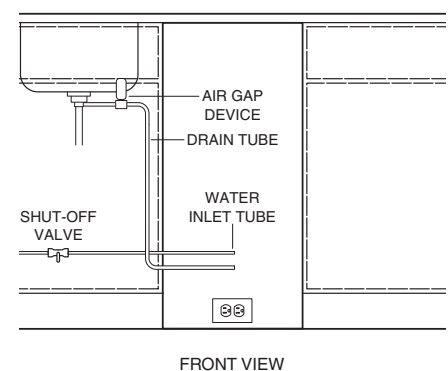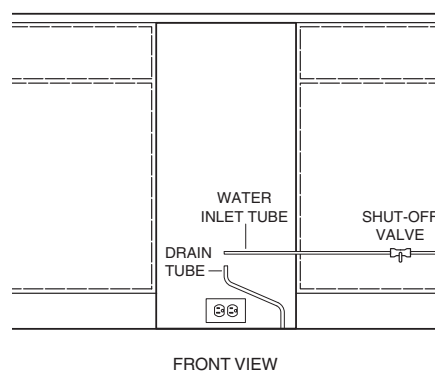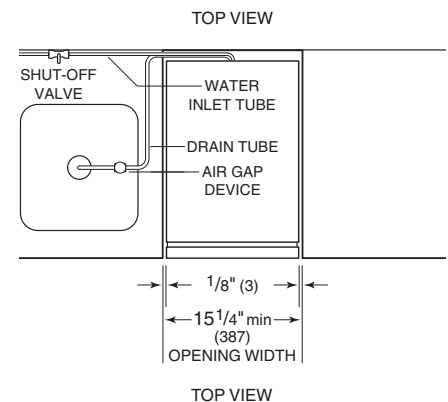

Location of Water Supply



Dimensions in parentheses are in millimeters unless otherwise specified.



Dishwashing

Single DishDrawer™ Tall



DD24SDFTX7 EZKleen Stainless Steel Single Tall

Key Features

- SmartDrive™ Technology
- Intelligent water level sensing for optimum performance
- Flow through detergent dispenser
- Quiet operation
- Ergonomic design

Dimensions

H 18 13/16 x W 23 9/16 x D 22 1/2

Product Info

With over a decade of DishDrawer™ manufacturing, we introduce the latest addition by Fisher & Paykel to revolutionize your kitchen; DishDrawer™ Tall. Continuing with the ergonomically superior design of DishDrawer™, Fisher & Paykel have found new ways to make your dishwashing experience even easier. By increasing the height of the drawer you can now fit up to 13" plates with ease, making cleaning up after dinner parties a breeze.

Finishes

-  EZKleen Stainless Steel

Accessories

- Cutlery basket1
- Knife clip2

Capacity and loading

- Place settings per drawer 7
- Flexible racking system
- Fold down and pitch adjustable tines
- Adjustable racks and cup racks
- Accommodates long stemmed wine glasses
- Accommodates plates up to 13 inches

Consumption Data

- Test programme Normal Eco
- EnergyStar approved
- Water usage (per drawer) 2 gallons
- Energy rating (per drawer) ENERGY STAR rated CEE tier 1

Controls

- Key lock
- Child lock
- End of cycle beeps
- One button start
- Energy saving delay start option up to 12 hours
- Rinse aid indicator light and lens
- Electronic fault/Diagnostic indicator
- Concealed control panels with single touch programming

Performance

- SmartDrive™ Technology
- Fan assisted drying
- Quiet operation
- Ergonomic design
- Flow through detergent dispenser
- Intelligent water level sensing for optimum performance

Power Requirements

- Supply voltage 110-120V
- Supply frequency 60Hz
- AMP draw 5.8A

Safety

- Three stage flood protection

Warranty

- Warranty 1 year

Wash Programmes

- 9 wash programmes
- Eco options
- Permanent memory of the last cycle used
- Heavy
- Heavy Eco
- Normal
- Normal Eco
- Fast
- Fast Eco
- Delicate
- Delicate Eco
- Rinse

Dimensions

- Overall height of product 18 13/16
- Overall width of product 23 9/16
- Overall depth of product 22 1/2

Contact Details

Fisher & Paykel Appliances Inc.
5900 Skylab Road

Huntington Beach CA 92647
USA
Phone: 1.888.936.7872
Fax: 1.800.547.1971

Check with your local retailer for pricing, availability and stock of this model. The product dimensions and specifications in this page apply to the specific product and model. Under our policy of continuous improvement, these dimensions and specifications may change at any time. You should therefore check with your retailer or Fisher & Paykel's Customer Care Centre to ensure this page correctly describes the model currently available.



Superba® Series EQ | EQ Wash System | 40 dBA (per IEC standards, normal cycle) | 6 Cycles | 7 Options | Architect® Series II
Base model: KUDE70FXSS | MSRP: \$1,749.00 - \$1,799.00*



This dishwasher is the quietest dishwasher in our line at 40 dBA (per IEC standards, normal cycle). And with one touch, the ProWash™ Cycle gives you the best wash results, while dishes are dried to a near spot-free shine with the ProDry™ Option.

PRODUCT FEATURES

- 2 Cup Shelves
- Culinary Tool Rack
- Fully integrated console has an ergonomic design, is easy to use, and blends into any kitchen
- ProDry™ Option takes all the guesswork out of drying dishes as glassware and dishes are dried to a near spot-free shine
- ProScrub® Option uses 36 powerful spray jets to deliver concentrated cleaning for stubborn messes
- SatinGlide® Max System utilizes premium rails as the key to smooth operation and to accommodating optimal dish loading in both racks
- Whisper Quiet® (40 dBA) Sound Insulation System helps maintain a quiet home during operation
- ENERGY STAR® Qualified - Tier II

OPTIONAL ACCESSORIES

- Affresh Dishwasher and Disposal Cleaner 6 Tablets
- 3-Prong Dishwasher Power Supply Kit
- 3-Prong Dishwasher Power Supply Kit
- Dishtrick Stemware Bundle
- Dishtrick Affresh Cleaner & Pre-Rinse Bundle
- Dishtrick Capacity Extension Bundle

PERFORMANCE

Optimum Wash Sensor	Optimum Wash Sensor
Normal Cycle	■
Number of Cycles	6
Rinse Only Cycle	■
Hi Temp Wash Option	■
Number of Options	7
One Hour Wash Cycle	One Hour Wash
Light/China Cycle	■
Console Style	Fully Integrated
Sani-Rinse™ Option	■
4 Stainless Steel Wash Arms	S-Shape 2 Arm

QUALITY CONSTRUCTION

Durakote™ Nylon Racks	Nylon
Commerical Grade Stainless Steel Tub	Stainless
Tub Design	Tall Tub
Sound Tested DBA	40
Rack Glides	Satin Glide Max

LOADING FEATURES

Lower Rack	2 Fold-Down Tines
Capacity	16 Place Settings
Upper Rack	2 Fold-Down Tines
Premium Easy Lift Upper Rack Adjuster	Premium - 2 Position
3rd Level Culinary Tool Rack	Culinary Rack

GENERAL

ENERGY STAR® Qualified	■
------------------------	---

DIMENSIONS

Product Height	34 1/2 Inches
Product Depth	27 1/2 Inches
Product Width	23 7/8 Inches
Maximum Height	34 1/2 Inches
Minimum Height	33 3/4 Inches

ELECTRICAL

279 kWh per Year

- Dishtrick Baby Bundle
- Universal Industrial-Grade 6' Dishwasher Water Supply Kit
- 3/4" X 3/8" Elbow Hose Fitting
- Affresh Stainless Steel Cleaner 16 oz

AVAILABLE COLORS

 STAINLESS STEEL | KUDE70FXSS
MSRP*: \$1,799.00

 PANEL READY | KUDE70FXPA
MSRP*: \$1,749.00

For questions regarding major appliances, call 1-800-422-1230. Monday - Friday 8 a.m. - 6 p.m. local time

*MSRP is Manufacturer's Suggested Retail Price and may not necessarily be the price at which the product is sold in the consumer's area. Dealer alone determines actual price.



Batch Feed Disposer | 1 HP Motor | MultiGrind Plus™ Technology

Base model: KBDS100T | MSRP: \$449.00*



FEATURES

Automatic Reversing	▪
Overload Protection	Manual Reset Overload
Dishwasher Connection	▪

PERFORMANCE

Grinding Wheel	MultiGrind Plus
Horsepower Rating	1

INSTALLATION

Quick Mounting System	▪
-----------------------	---

ELECTRICAL

15 or 20 Amps. 60 Hz. 120 V.

Experience the effortless performance of this 40-ounce food disposer. Advanced grinding and sound-reducing technologies quietly conquer your toughest disposing challenges.

PRODUCT FEATURES

- MultiGrind™ Plus Technology features four grinding components that work together to handle anything from cornhusks to celery
- The Jam-Sensor™ circuit automatically senses, then breaks through the toughest jams before you even notice a problem
- SoundSeal™ Plus Technology combines four advanced sound-reducing components to make this disposer 60% quieter than a standard disposer
- Batch feed system operates when the cover is inserted into the mouth of the disposer by turning the stopper to the left or right
- Corrosion-resistant grind and drain chambers ensure lasting quality
- Stainless steel shredder ring and grinding wheel add strength and provide longer disposer life

OPTIONAL ACCESSORIES

- Disposer Power Cord
- Affresh Dishwasher and Disposal Cleaner 6

Tablets

AVAILABLE COLORS

 RED | KBDS100T
MSRP*: \$449.00

For questions regarding major appliances, call 1-800-422-1230. Monday - Friday 8 a.m. - 6 p.m. local time

*MSRP is Manufacturer's Suggested Retail Price and may not necessarily be the price at which the product is sold in the consumer's area. Dealer alone determines actual price.



36" Integrated Combination—Tall

Integrated refrigeration can be used anywhere in the home. It merges seamlessly into the décor, with no visible hinges or grilles. Model 736TCI has an upper cabinet refrigerator with freezer storage drawers. Two distinct temperature zones ensure the freshest food and energy efficiency. This model is ENERGY STAR® qualified for energy efficiency.



FEATURES

- Upper cabinet refrigerator and two freezer storage drawers.
- Custom front panels and hardware allow for infinite design options.
- Point-of-use refrigeration that can be placed anywhere in the home.
- Dual refrigeration system ensures the freshest food and energy efficiency.
- Microprocessor maintains precise control, within 1° of set temperature.
- Easy-access, illuminated touch control panel.
- Bright interior lighting in cabinet and drawers.
- Adjustable spill-proof glass shelves, door shelves and dairy compartment.
- High-humidity drawer keeps fruits and vegetables crisp and fresh.
- Smooth-glide, full-extension storage drawers.
- Alarm feature will sound an audible beep if door or drawer is left open.
- Automatic ice maker provides crescent-shaped ice.
- 90° door stop built into hinge.
- Star-K compliant with harness kit.

MODEL

736TCI

Design

Integrated

INTERIOR FEATURES

- **Refrigerator**
 - Dual Refrigeration
 - 2 Temperature Zones
 - 3 Adjustable Glass Shelves
 - 1 Stationary Shelf
 - Stationary Crisper Drawer
 - 3 Adjustable Door Shelves
 - Adjustable Dairy Compartment
 - Egg Container
- **Freezer (Drawers)**
 - 1 Removable Drawer Divider
 - Automatic Defrost
 - Automatic Ice Maker

ACCESSORIES

- Stainless steel front panels with tubular or pro handles—80" or 84" finished height.
- Stainless steel tubular and pro handles.
- Dual installation kit for installation with column, tall or drawer model.
- Deli drawer and shelf assembly.
- Dozen egg container.


Accessories are available through your Sub-Zero dealer. For local dealer information, visit the find a showroom section of our website, subzero.com.





36" Integrated Combination—Tall

OVERALL DIMENSIONS

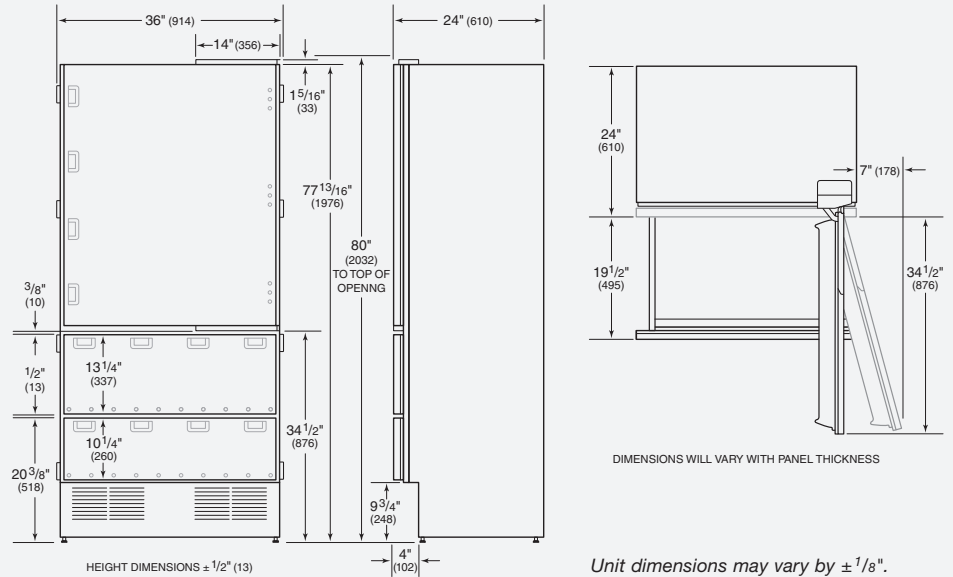


SPECIFICATIONS

Overall Width	36"
Overall Height	80"
Overall Depth	24"
Door Clearance	34 1/2"
Drawer Clearance	19 1/2"
Refrigerator Capacity	13.3 cu ft
Freezer Capacity	7.1 cu ft
Finished Opening	36" W x 80" H x 25" D*
Electrical Requirements	115 V AC, 60 Hz 15 amp dedicated circuit
Plumbing Requirements	1/4" OD copper, braided stainless steel or PEX tubing 35–120 psi
Shipping Weight	480 lbs

*Depth is 24" from the front of the unit to its back. Your design may necessitate moving the unit back, or cabinets forward to achieve a flush fit. This will require a minimum opening depth of 25".

INSTALLATION SPECIFICATIONS

Opening Dimensions

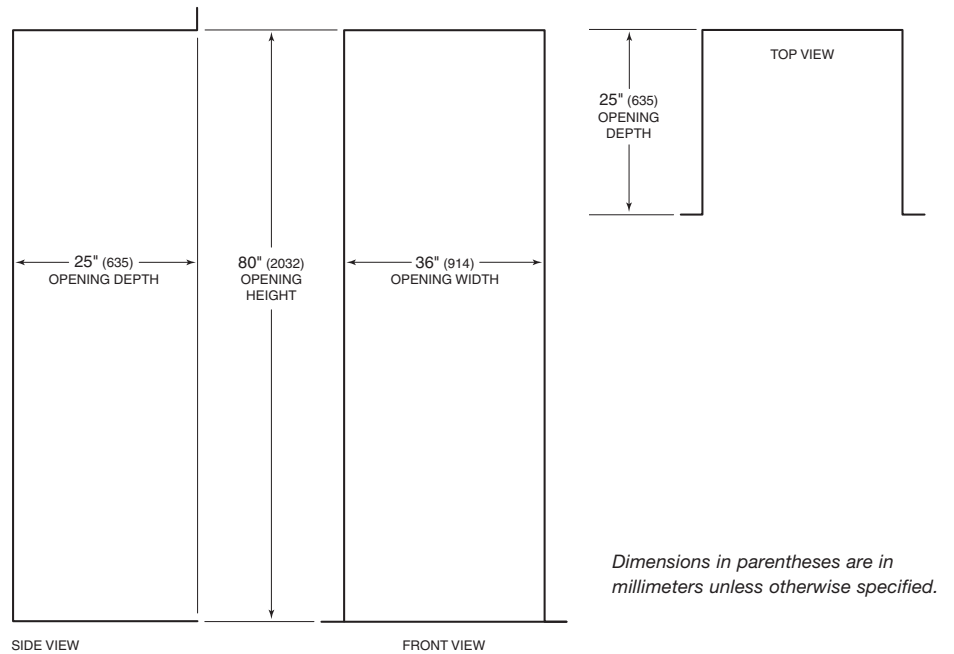


INSTALLATION NOTES


Stainless steel panels with handles are available as accessories. These panels are not installed at the factory.

Complete installation specifications, including panel sizes, can be found on our website, subzero.com/specs.

Location of Electrical Supply



Location of Water Supply

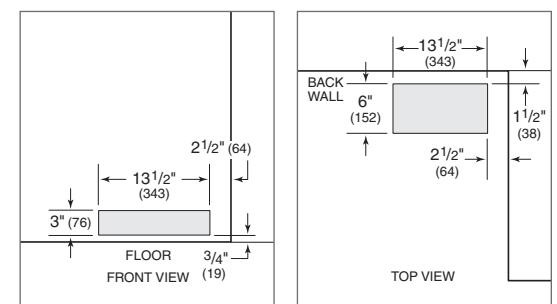



27" Integrated Combination—Drawers

Integrated refrigeration can be used anywhere in the home. It merges seamlessly into the décor, with no visible hinges or grilles. Model 700BC(I) offers refrigerator storage in the upper drawer with freezer storage in the lower drawer. Two temperature zones ensure the freshest food and energy efficiency. Model 700BCI features an automatic ice maker. This model is ENERGY STAR® qualified for energy efficiency.



FEATURES

- Upper refrigerator storage drawer and lower freezer storage drawer.
- Custom front panels and hardware allow for infinite design options.
- Point-of-use refrigeration that can be placed anywhere in the home.
- Microprocessor maintains precise control, within 1° of set temperature in each of two temperature zones.
- Easy-access, illuminated touch control panel in upper refrigerator drawer.
- Bright interior lighting.
- Removable crisper cover on upper refrigerator drawer.
- Upper drawer is deep enough for bottled drinks to stand upright.
- Smooth-glide, full-extension storage drawers.
- Alarm feature will sound an audible beep if a drawer is left open.
- Automatic ice maker provides crescent-shaped ice (700BCI).

MODEL OPTIONS

	700BC	700BCI
Design	Integrated	Integrated
Automatic Ice Maker		•

INTERIOR FEATURES



- **Refrigerator**
Upper Storage Drawer
Independent Temperature Zone
Removable Crisper Cover
- **Freezer**
Lower Storage Drawer
Independent Temperature Zone
1 Removable Drawer Divider (700BC)
Automatic Defrost
Automatic Ice Maker (700BCI)

ACCESSORIES

- Stainless steel front panels with tubular or pro handles.
- Stainless steel tubular and pro handles.
- Dual installation kit for installation with column, tall or drawer model.
- Dozen egg container.

Accessories are available through your Sub-Zero dealer. For local dealer information, visit the find a showroom section of our website, subzero.com.



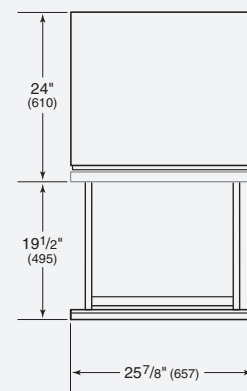

DIMENSIONS WILL VARY WITH PANEL THICKNESS

Unit dimensions may vary by $\pm 1/8"$.

Overall Width	27"
Overall Height	34 ¹ / ₂ "
Overall Depth	24"
Drawer Clearance	19 ¹ / ₂ "
Refrigerator Capacity	2.9 cu ft
Freezer Capacity	2.1 cu ft
Opening Width	27"
Opening Height	34 ¹ / ₂ "
Opening Depth	25"

Electrical Requirements 115 V AC, 60 Hz
15 amp dedicated circuit


Plumbing Requirements (Model 700BCI) $\frac{1}{4}$ " OD copper, braided stainless steel or PEX tubing, 35–120 psi

Shipping Weight	190 lbs
-----------------	---------


"Depth is 24" from the front of the unit to its back. Your design may necessitate moving the unit back, or cabinets forward to achieve a flush fit. This will require a minimum opening depth of 25".

INSTALLATION SPECIFICATIONS


Opening Dimensions

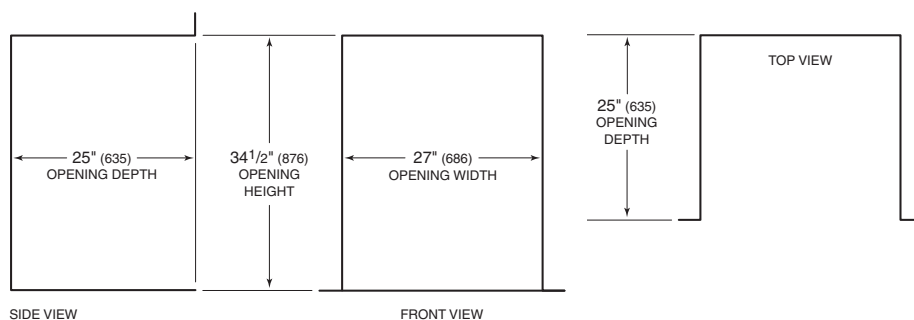

Location of Electrical Supply



Location of Water Supply (Model 700BCI)

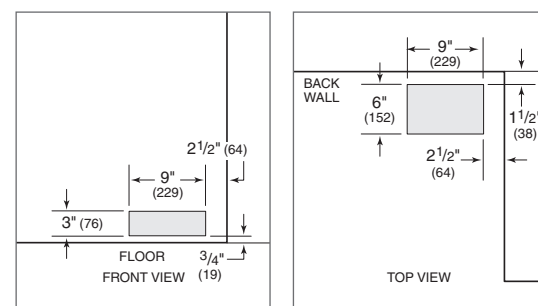

INSTALLATION NOTES

Stainless steel drawer front panels with handles are available as accessories. These panels are not installed at the factory.

Complete installation specifications, including panel sizes, can be found on our website, subzero.com/specs.

Dimensions in parentheses are in millimeters unless otherwise specified.



27" Wine Storage

Better wine storage conditions for the bottle ultimately means better enjoyment in the glass. Model 427G has a wine storage capacity of 132 (750 ml) bottles. Two independent storage zones maintain the temperature and humidity that wine — and wine lovers — require. The integrated design allows the unit to merge seamlessly into the décor, with no visible hinges or grilles.



FEATURES

- Custom front panels and hardware allow for infinite design options.
- Integrated design allows for dual installation with integrated unit.
- Full-size wine storage with individual temperature control of two separate compartments.
- Maintains ideal storing and serving temperature for all wines, humidity and UV protection.
- Temperature zones range from 39°F to 65°F.
- Full-view, UV-resistant glass door—high altitude glass available.
- Illuminated touch control panel.
- Discreet interior lighting.
- Wine shelves accommodate 750 ml bottles, half-bottles and magnums.
- Roller-glide wine shelves with natural cherrywood facing have three-quarter extension for easy access.
- Illuminated display shelf for prized bottles of wine.
- Can be connected to home security system.
- Star-K compliant with installation of a harness kit.

ACCESSORIES

- Stainless steel front panel with tubular or pro handle—80" or 84" finished height.
- Stainless steel tubular and pro handles.
- Dual installation kits for installation with integrated column, tall or drawer model.
- Door lock.

Accessories are available through your Sub-Zero dealer. For local dealer information, visit the find a showroom section of our website, subzero.com.

ENEMIES OF WINE

Heat – Two independent storage zones can be set in a range of 39°F to 65°F, with one-degree digital accuracy.

Light – UV resistant bronze tinted glass shields wines from harmful rays.

Humidity – Dual evaporators, one for each storage zone, maintain steady, moderate humidity.

Vibration – Sub-Zero's quiet compressor lets wines rest undisturbed. Shelves glide out smoothly, providing access without agitating the wine.



For additional information on the enemies of wine, visit www.subzerowine.com.





27" Wine Storage

OVERALL DIMENSIONS

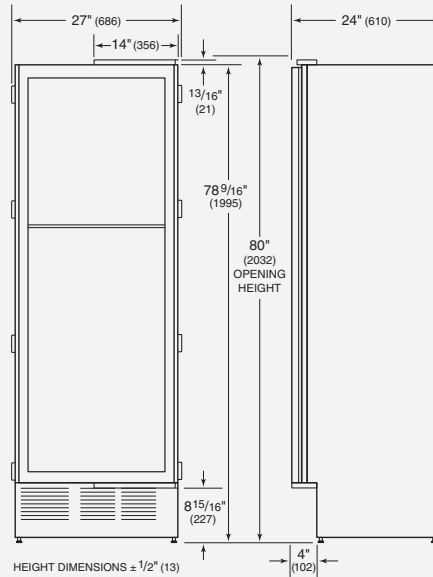

DIMENSIONS WILL VARY WITH PANEL THICKNESS

Overall dimensions do not include panels or handles.

Unit dimensions may vary by $\pm 1/8"$.

SPECIFICATIONS



Overall Width	27"
Overall Height	80"
Overall Depth	24"
Door Clearance	25 1/2"
Wine Storage Capacity	132 bottles*
Opening Width	27"
Opening Height	80"
Opening Depth	25"***
Electrical Requirements	115 V AC, 60 Hz 15 amp dedicated circuit
Shipping Weight	395 lbs

*750 ml bottles.

**Depth is 24" from the front of the unit to its back. Your design may necessitate moving the unit back, or cabinets forward to achieve a flush fit. This will require a minimum opening depth of 25".

INSTALLATION SPECIFICATIONS

Opening Dimensions

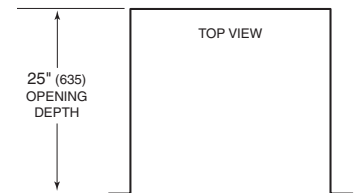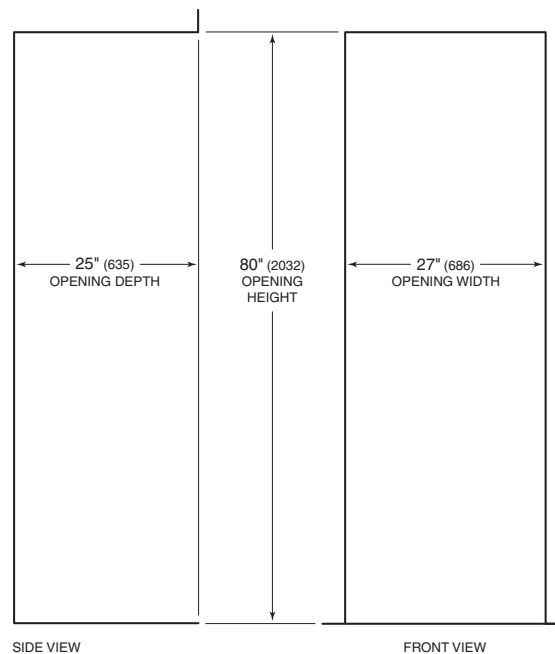


Dimensions in parentheses are in millimeters unless otherwise specified.

INSTALLATION NOTES

Stainless steel panels with handles are available as accessories. Panels can be ordered to include a lock. These panels are not installed at the factory.

Complete installation specifications, including panel sizes, can be found on our website, subzero.com/specs.

Location of Electrical Supply





[facebook](#)

Search

We've got you covered with the best warranty in the industry...5 year warranty on Magic Lung products!

- [Home](#)
- [About Vent-A-Hood®](#)
- [Range Hoods](#)
- [Product Specifications](#)
- [Magic Lung](#)
- [Catalog](#)
- [How To Choose](#)
- [Where To Buy](#)
- [Distributor Map](#)
- [Glossary](#)
- [Contact Us](#)



BHPSLB • Standard Wall Mount Liners

Documentation - Adobe Acrobat

- [Click here for Installation Instructions](#)
- [Click here for Technical Specifications](#)
- [Click here for ducting and parts](#)



Models


Halogen Width CFM Equiv. CFM * Func. Specs

BH446PSLB


Halogen lights. This model is not available with heat lamps.

Dimensional Information


Width	46.375
Depth	22.5
Height	12.0
CFM @ 0.0" SP	1200.0
Sones	6.6
Amps	7.3
# Lights	3.0

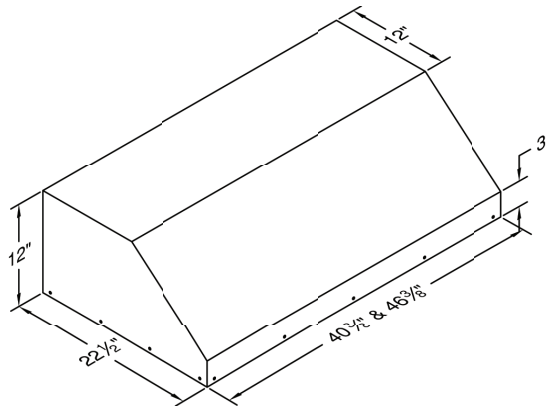


Connection Diagram

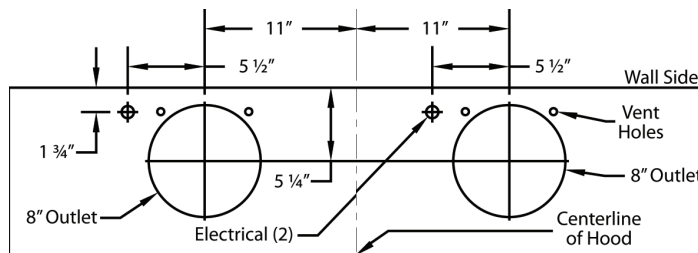

1200 CFM Double B200 Dual Blowers (Top View)

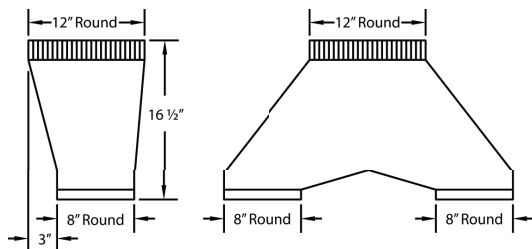


VP563 Transition (Optional) For B400 (Double B200 Dual Blowers)

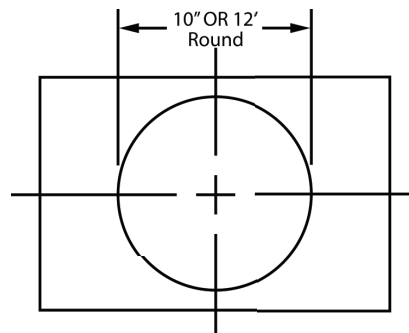

VP563 transition centers outlet over top of hood.

Recommended Mounting Height*

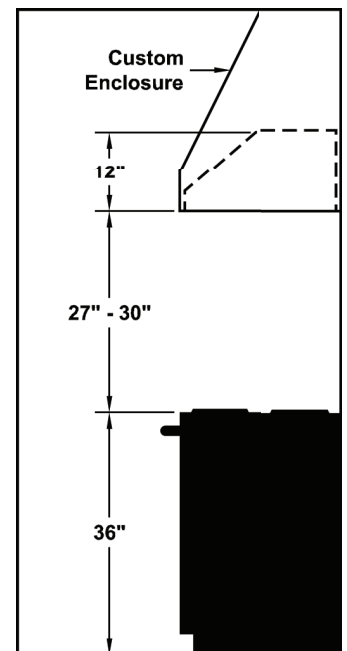

*Exceeding recommended mounting height may compromise performance.

Electrical/Mechanical Specifications For Blower Unit

Model	Volts	Amps*	Hz	RPM	CFM SP@0.0"	Equivalent CFM	CFM SP@0.1"	CFM SP@0.2"	CFM SP@0.3"	Minimum Round Duct Size	Sones#
Two B200 Duals	115.0	5.8	60.0	1550.0	1200.0	1800.0	1062.0	960.0	860.0	12" (113 sq. in.)	6.6

+ This model is equipped with three halogen lights.

\$ Because the Magic Lung® blower uses centrifugal filtration rather than conventional baffle or mesh filters, the Magic Lung® blower can handle cooking equipment with higher cubic feet per minute (CFM) requirements and can deliver equivalent CFM much more efficiently than other filtration systems. When comparing the Magic Lung® with other blower units made by other manufacturers, use the "Equivalent CFM".

Ratings in accordance with the Standard Test Code by the Energy Systems Laboratory of the Texas Engineering Experiment Station.



48" Dual Fuel Ranges

Wolf dual fuel ranges offer a wide variety of top configurations and standard dual-stacked sealed surface burners. The optional infrared charbroiler, infrared griddle and French top allow you to customize your range. The large oven features the Wolf exclusive dual convection system. Both convection ovens offer ten cooking modes. Dual fuel ranges are available in natural or LP gas.



Model DF484CG shown with 20" riser with shelf.



Model DF486C



Model DF486G



Model DF484CG



Model DF484DG



Model DF484F

FEATURES

- Stainless steel exterior finish with island trim included.
- Red or black control knobs (specify with range).
- Platinum bezels surround all knobs.
- Dual-stacked, sealed burners, all with simmer capabilities and automatic reignition at all settings.
- Melt feature on 9,200 Btu burner.
- Ten cooking modes, temperature probe and self-clean features.
- Porcelain-coated cast iron continuous top grates.
- Pivoting hidden touch control panel.
- Coaxial temperature displaying oven selector knobs.
- Cobalt blue porcelain oven interiors with halogen lighting.
- Three adjustable oven racks; one full-extension easy glide, one full-extension door glide and one standard (18" oven—three standard).
- Hidden bake element and recessed broil element in each oven.
- Spring/damper door hinge system.



Rotating control panel.



Cobalt blue oven interior.

SURFACE FEATURES

Model	DF486C	DF486G	DF484CG	DF484DG	DF484F
Surface Burners					
15,000 Btu high / 950 Btu simmer	5	5	3	3	3
Surface Burner					
9,200 Btu high / 325 Btu simmer	1	1	1	1	1
Infrared Charbroiler – 16,000 Btu	•		•		
Infrared Griddle – 15,000 Btu		•	•		
Double Griddle – 15,000 Btu				•	
French Top – 15,000 Btu					•

Model numbers are for natural gas dual fuel ranges, add (-LP) to the model number for LP gas.

ACCESSORIES

- Stainless steel risers in 5" and 10" heights, or 20" riser with shelf.
- Red or black control knobs.
- Chrome or brass bezels.
- One piece porcelain-cast wok grate and single burner grate.
- Porcelain-cast two-burner S-grate.
- Set of three standard oven racks.
- One full-extension easy glide rack for 30" oven.
- Broiler pan and temperature probe.
- Hardwood cutting board (griddle models only).
- Bake stone kit.
- Dehydration kit.
- 30" baking sheet kit.

- Griddle cleaning kit.
- Front leg extension covers and rear caster covers.
- High altitude conversion kits.

Accessories are available through your authorized Wolf dealer. For local dealer information, visit the find a showroom section of our website, wolfappliance.com.




This appliance is certified by Star-K to meet strict religious regulations in conjunction with specific instructions found on www.star-k.org.



48" Dual Fuel Ranges

OVERALL DIMENSIONS

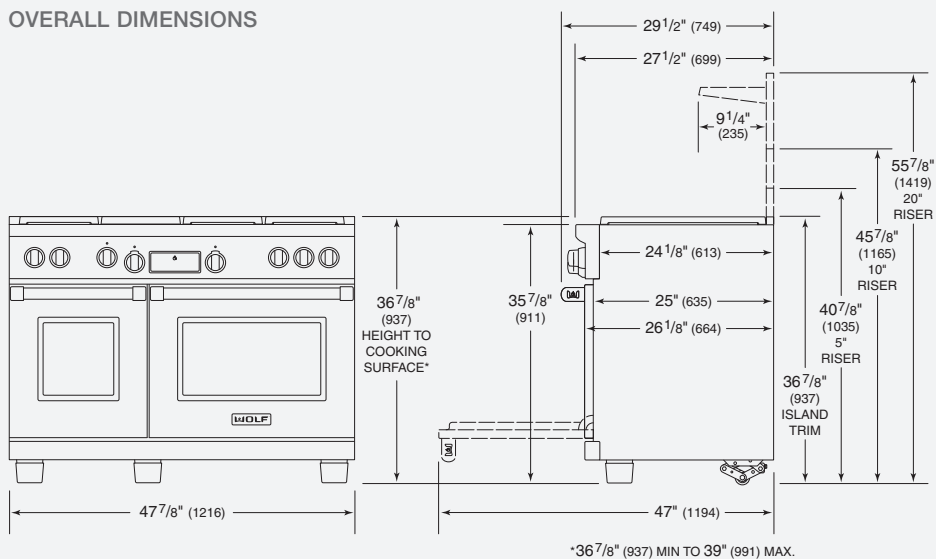


Unit dimensions may vary by $\pm 1/8$ ".

SPECIFICATIONS

Exterior Finish	Stainless Steel
Overall Width	47 7/8"
Overall Height (to cooking surface)	36 7/8"
Overall Depth	29 1/2"
Large Oven Interior Capacity	4.5 cu ft
Small Oven Interior Capacity	2.5 cu ft
Large Oven Interior Dimensions	25" W x 16 1/2" H x 19" D
Small Oven Interior Dimensions	14" W x 16 1/2" H x 19" D
Opening Width	48"
Opening Height (to countertop)	36"
Opening Depth	24"
Electrical Requirements	240/208 V AC 60 Hz, 50 amp circuit
Electrical Rating	10.2 kW at 240 V AC 8.8 kW at 208 V AC
Total Amps	42.5
Shipping Weight	665–750 lbs

INSTALLATION SPECIFICATIONS

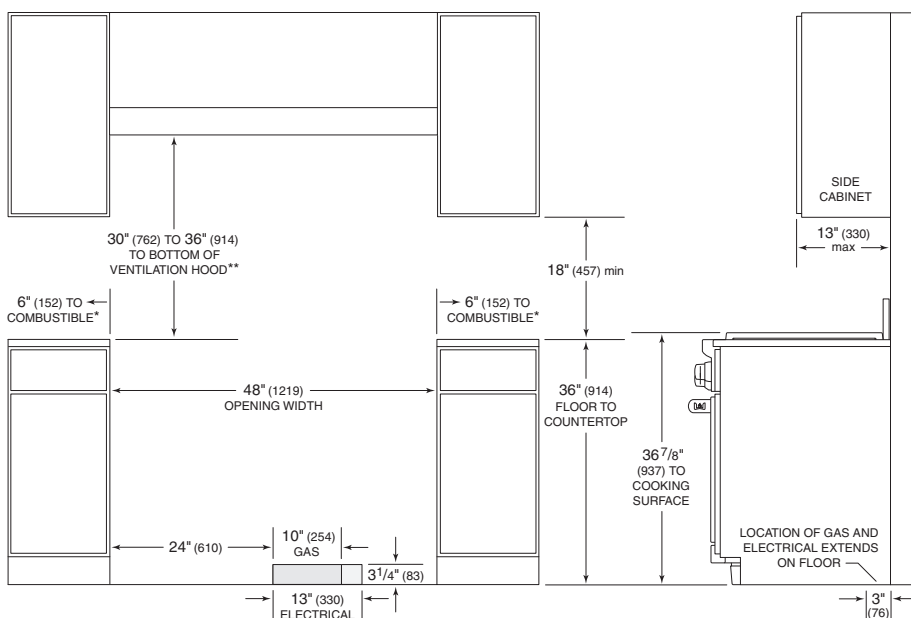

*Minimum clearance from rough opening to combustible materials up to 18" (457) above countertop.

**36" (914) minimum clearance, 44" (1118) for charcoal, from countertop to combustible materials without ventilation hood.

NOTE: For island installations, 12" (305) minimum clearance from back of range to combustible rear wall above countertop.

INSTALLATION NOTES

- A riser is required for installations against a combustible surface.
- A Wolf pro wall, chimney, island ventilation hood or hood liner is recommended.
- High altitude conversion kit for LP gas installations above 8,600'. For natural gas above 10,250', contact Wolf customer service.

Dimensions in parentheses are in millimeters unless otherwise specified.



Convection Microwave Oven

The Wolf convection microwave oven with optional trim can be used in combination with a Wolf built-in oven and/or warming drawer to finish off your cooking tower with an integrated look. You can choose from two different trim styles to match our built-in ovens. Whether you use it free-standing or in a combination installation, model MWC24 offers you the convection performance you would expect from Wolf.

Model MWC24 shown with 36" L series trim installed above model SO36U/S 36" built-in oven.



FEATURES

- Built-in or freestanding convection microwave oven with 1.5 cu ft capacity and 900 watts of power.
- Stainless steel trim to match L series and E series ovens.
- Black glass E series trim.
- Sensor cooking.
- Slow cook mode for up to four hours.
- Easy-to-operate control panel and programmable power options.
- Interactive display—99 minutes, 99 seconds.
- Menu label and food guide.
- Multi-language—English, French and Spanish.
- Removable turntable and turntable support.
- Microwave tray for popcorn and meat.
- Multiple-rack baking.
- Safety door latches—oven will not operate unless the door is closed.
- Oven light comes on when oven is operating or door is open.
- Tight door seals with one-touch door open pad.

BUILT-IN TRIM KITS

- 27" E series.
- 30" E series.
- 30" L series.
- 36" L series.



This appliance is certified by Star-K to meet strict religious regulations in conjunction with specific instructions found on www.star-k.org.

ACCESSORIES

The optional trim kits listed above are available as sales accessories through your authorized Wolf dealer. For local dealer information, visit the find a showroom section of our website, wolfappliance.com.




Control panel.




Convection Microwave Oven

OVERALL DIMENSIONS

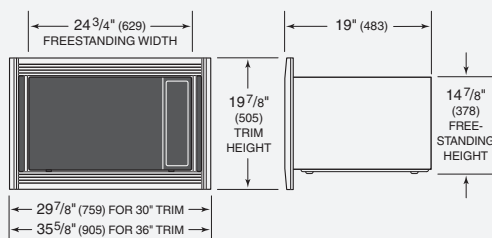

L Series Trim

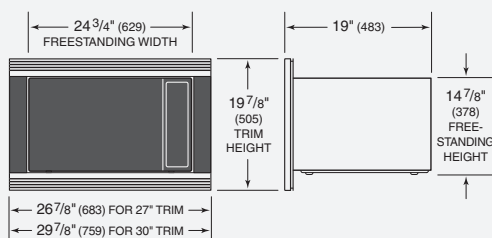

E Series Trim


Unit dimensions may vary by $\pm 1/8$ ".

SPECIFICATIONS

Overall Width (freestanding)	24 ³ / ₄ "
Overall Width with 30" Trim	29 ⁷ / ₈ "
Overall Width with 27" Trim	26 ⁷ / ₈ "
Overall Width with 36" Trim	35 ⁵ / ₈ "
Overall Height (freestanding)	14 ⁷ / ₈ "
Overall Height with Trim	19 ⁷ / ₈ "
Overall Depth	20 ¹ / ₈ "
Interior Capacity	1.5 cu ft
Interior Dimensions	16 ¹ / ₈ " W x 9 ⁵ / ₈ " H x 16 ¹ / ₈ " D
Power	900 W
Electrical Rating (with convection)	1.6 kW
Electrical Requirements	110/120 V AC 60 Hz, 15 amp circuit
Power Cord	3' cord with grounded plug
Shipping Weight	68 lbs

INSTALLATION SPECIFICATIONS

Built-In Installation with Trim

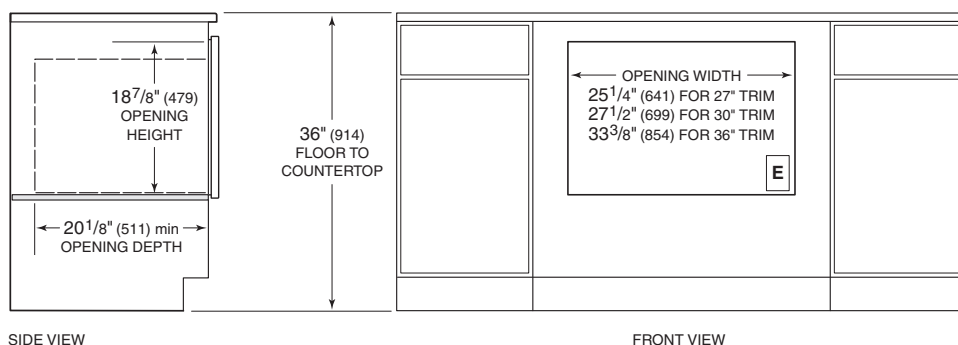

SIDE VIEW

FRONT VIEW

Dashed line represents profile of unit.

INSTALLATION NOTES

If the microwave oven is built in, a trim kit is required for proper ventilation.

Specifications will vary with L series and E series trim kits. Refer to installation instructions provided with the trim kit for detailed specifications.

Complete installation specifications can be found on our website, wolfappliance.com.

Dimensions in parentheses are in millimeters unless otherwise specified.



LAUNDRY

KITCHEN

HOME SOLUTIONS

FILTERS & ACCESSORIES

SERVICE & SUPPORT

home search results wed97hexw

print | share | contact

Duet® High Efficiency Electric Dryer with Steam Cycles

Model WED97HEXW Rating: ★★★★★ 8 Reviews

we also recommend

works best with



pan

Zoom

reset



see more photos



White
MSRP \$1,599.00

add to favorites

add to compare

where to buy

Overview

Features

Specifications

Ratings & Reviews

Parts & Accessories

Manuals & Literature

Configuration and Overview

Dryer Fuel Type : Electric
Capacity : 7.4 Cu. Ft.

Product Dimensions

31 1/8

38 1/8

27

Whirlpool Sensing and Adapting Technology

Accudry : Six Sense Technology Sensor

Dimensions are for planning purposes only.
For complete information, visit service and support.

Energy and Eco-Friendly

Eco Monitor : Eco Monitor

Style and Extras

Drum Light : LED Auto/Selectable
Reversible Door : Reversible Side-Swing Door

Cycle and Options

Steam : Quick Refresh - 1-12 garments
Wrinkle Prevention : Wrinkle Shield w/ Steam
Number of Cycles : 13

Dimensions

Depth : 31 1/8
Width : 27
Height : 38 1/8

LAUNDRY

HE Front-Load Washers
HE Top-Load Washers
HE Dryers
Traditional Washers
Traditional Dryers
Laundry Pairs
Washer-Dryer Combos
Laundry 1-2-3™ Organizers

REFRIGERATORS

French Door
Side-By-Side
Bottom-Freezer
Top-Freezer

COOKING

Ranges
Wall Ovens
Cooktops
Microwaves

DISHWASHERS & CLEANING

Dishwashers
Compactors
Disposers

FILTERS & ACCESSORIES

Laundry Accessories
Kitchen Accessories
Home Solutions
Accessories
Refrigerators Water Filters

HOME SOLUTIONS

Water Heaters
Water Softeners
Room Air Conditioners
Central Heating & Air Conditioning
Water Filtration Systems

SERVICE & SUPPORT

My Appliances
Product Registration
Manuals & Literature
Service & Repair
Product Help
Service Plan
Product Recalls
Replacement Parts

**WHIRLPOOL
BRAND CARES**
Habitat for Humanity
Whirlpool® Eco
& ENERGY STAR®

**WHIRLPOOL
CORPORATION**
Press & Media
Investors
Careers

CONNECT WITH US



ADDITIONAL RESOURCES

Chat
Store Locator
Glossary
Contact Us
Whirlpool® Brand
Outlet Store
Commercial Laundry
About Whirlpool® Brand

MSRP is Manufacturer's Suggested Retail Price and may not necessarily be the price at which the product is sold in the consumer's area. Dealer alone determines actual price.

[Terms of Use](#) | [Privacy](#)

® Registered trademark/TM Trademark of Whirlpool, U.S.A. © 2012 Whirlpool Corporation. All Rights Reserved. All other trademarks are owned by their respective companies.



LAUNDRY

KITCHEN

HOME SOLUTIONS

FILTERS & ACCESSORIES

SERVICE & SUPPORT

home search results wfw97hexw

print | share | contact



4.3 cu. ft. Duet® Steam Front Load Washer with Precision Dispense Ultra

Model WFW97HEXW Rating: ★★★★★ 14 Reviews

we also recommend

works best with



pan

Zoom

reset



see more photos



White
MSRP \$1,599.00

add to favorites

add to compare

where to buy

Overview

Features

Specifications

Ratings & Reviews

Parts & Accessories

Manuals & Literature

Configuration and Overview

Capacity : 4.3 Cu. Ft.

Energy and Eco-Friendly

Product Dimensions

32 3/4

38 1/2

27

Energy Star® Qualified :	Yes
CEE Tier III Energy Star :	CEE Tier III level

Dimensions are for planning purposes only.
For complete information, visit service and support.

Whirlpool Sensing and Adapting Technology

Care Control Temperature Management :	Care Control Temperature Management
---------------------------------------	-------------------------------------

Cycle and Options

Spin Speed :	1400
Delicate :	Delicates
Clean Washer :	Clean Washer with Affresh™
Number of Cycles :	26
Quick Wash/Rapid Wash :	Yes
Delay Start :	20 Hour

Dimensions

Height :	38 1/2
Width :	27
Depth :	32 3/4

- (1) Allergens tested were dust mites and pet dander.
(2) Based on 6X concentration of HE detergent.

LAUNDRY

HE Front-Load Washers
HE Top-Load Washers
HE Dryers
Traditional Washers
Traditional Dryers
Laundry Pairs
Washer-Dryer Combos
Laundry 1-2-3™ Organizers

REFRIGERATORS

French Door
Side-By-Side
Bottom-Freezer
Top-Freezer

COOKING

Ranges
Wall Ovens
Cooktops
Microwaves

DISHWASHERS & CLEANING

Dishwashers
Compactors
Disposers

FILTERS & ACCESSORIES

Laundry Accessories
Kitchen Accessories
Home Solutions
Accessories
Refrigerators Water Filters

HOME SOLUTIONS

Water Heaters
Water Softeners
Room Air Conditioners
Central Heating & Air Conditioning
Water Filtration Systems

SERVICE & SUPPORT

My Appliances
Product Registration
Manuals & Literature
Service & Repair
Product Help
Service Plan
Product Recalls
Replacement Parts

**WHIRLPOOL
BRAND CARES**
Habitat for Humanity
Whirlpool® Eco
& ENERGY STAR®

**WHIRLPOOL
CORPORATION**
Press & Media
Investors
Careers

CONNECT WITH US



ADDITIONAL RESOURCES

Chat	Whirlpool® Brand
Store Locator	Outlet Store
Glossary	Commercial Laundry
Contact Us	About Whirlpool® Brand

MSRP is Manufacturer's Suggested Retail Price and may not necessarily be the price at which the product is sold in the consumer's area. Dealer alone determines actual price.

[Terms of Use](#) | [Privacy](#)

® Registered trademark/TM Trademark of Whirlpool, U.S.A. © 2012 Whirlpool Corporation. All Rights Reserved. All other trademarks are owned by their respective companies.



15" Framed Electric Cooktop

The black ceramic glass top of the Wolf 15" framed electric cooktop is beautifully complemented by the stainless steel trim. The integrated design allows for use with multiple cooktop units or modules. Two heating elements with four zones offer exceptional control of temperature for cooking utensils of various sizes. Both heating elements offer true simmer and one element has a melt setting.



FEATURES

- Integrated design allows for installation of multiple cooktops or modules.
- Stainless steel trim.
- Easy-to-clean black ceramic glass surface is resistant to scratching, staining, impact and heat—translucent surface allows you to see the glow of hot elements.
- High-frequency pulsation elements improve cooking performance and control.
- Two heating elements with four zones.
- Temperature limiter to ensure that safe operating temperature of ceramic glass is never exceeded.
- Illuminated touch controls with graduated control lighting.
- True simmer setting on both elements.
- Melt setting on one element.
- Hot-surface indicator light in control panel.
- Lock mode—cooktop can be locked so that no elements can be turned on.
- Universal OFF turns all elements off.
- Countdown timer with 1 to 99 minute range and adjustable sound frequency and volume.

MAXIMUM ELEMENT POWER

- Triple-zone element power: 900 W/1800 W/2500 W.
- Single element power: 1200 W.



Model CT15E/S

ACCESSORIES

- Filler strip for installation of multiple cooktops or modules.
- Bracket supports for installation of two integrated modules with downdraft (model DD30 only).

Accessories are available through your authorized Wolf dealer. For local dealer information, visit the find a showroom section of our website, wolfappliance.com.



This appliance is certified by Star-K to meet strict religious regulations in conjunction with specific instructions found on www.star-k.org.



Touch controls.




Translucent surface.



15" Framed Electric Cooktop

OVERALL DIMENSIONS

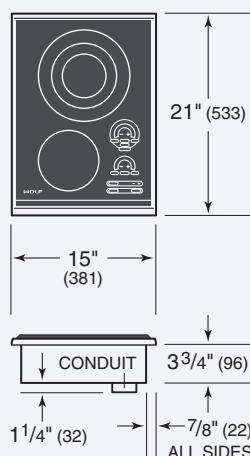


Unit dimensions may vary by $\pm 1/8$ ".

SPECIFICATIONS

Overall Width	15"
Overall Height	3 ³ / ₄ "
Overall Depth	21"
Heating Element Outer Diameter	
Triple	10"
Single	6 ¹ / ₂ "
Countertop Cut-Out*	13 ³ / ₈ " W x 19 ¹ / ₄ " D
Electrical Requirements	
	240 V AC / 60 Hz / 20 amp
	208 V AC / 60 Hz / 15 amp
Conduit	4" flexible 3-wire
Electric Rating	3.7 kW at 240 V AC
	2.8 kW at 208 V AC
Shipping Weight	30 lbs

*If the cooktop is to be used with any combination of additional cooktop units or modules with a filler strip, the cut-out width increases to 14".


INSTALLATION SPECIFICATIONS

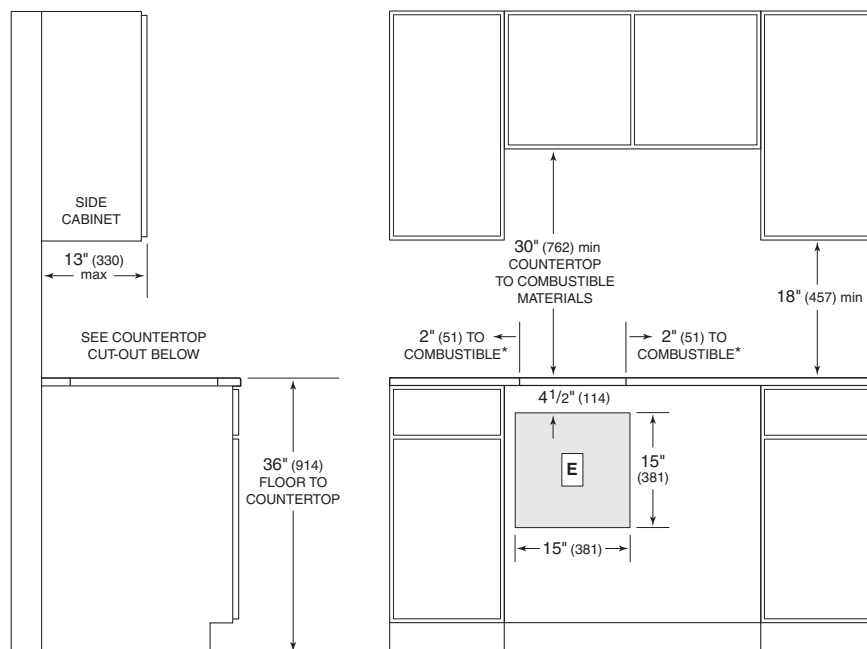

*Minimum clearance from cooktop cut-out to combustible materials up to 18" (457) above countertop.

NOTE: Application shown allows for installation of two 15" (381) modules side by side.

Countertop Cut-Out Dimensions

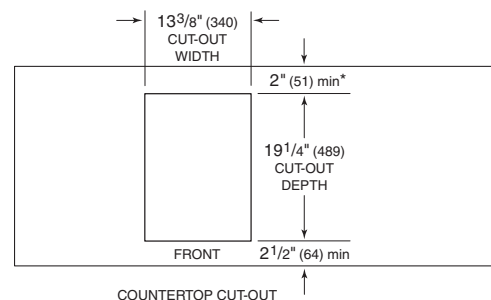

INSTALLATION NOTES

Complete installation specifications can be found on our website, wolfappliance.com.

Dimensions in parentheses are in millimeters unless otherwise specified.



36" Outdoor Gas Grill

Like their indoor counterparts, Wolf outdoor grills are precision instruments constructed of heavy-duty stainless steel. This 36-inch grill has powerful burners every five inches for even heat distribution. An electric rotisserie with infrared burner produces succulent poultry and roasts. The 25,000 Btu sear zone emits exceptionally high heat to sear meats faster and deeper. The Wolf outdoor grill can be built in or used on a cart for portable convenience. Available in natural or LP gas.



Model OG36 shown with portable grill cart.

FEATURES

- Can be built in or used in a portable application with accessory cart.
- Crafted of heavy-duty stainless steel.
- Each 25,000 Btu grill burner is individually contained for independent heat control.
- Infrared sear zone—direct heat sears meats to seal in juices.
- Radiant heat from ceramic briquettes mixes with direct heat for more thorough grilling.
- Two-position rotisserie system with 14,000 Btu infrared burner.
- Stainless steel burner grates.
- Halogen lights illuminate the grilling surface.
- Signature red control knobs are LED lit for night grilling.
- Electric hot surface ignitors operate by pushing in control knobs.
- Double wall hood front for insulation.
- Hood assist system with concealed springs for easy opening and closing.
- Three-position warming rack stows away when not in use.



LED lit control knobs.



Hot surface ignitor.

MODEL OPTIONS

Natural Gas

OG36

Liquid Propane (LP) Gas

OG36-LP

ACCESSORIES

- Stainless steel portable grill cart with fold-down side shelves and interior pull-out tray (see below).
- Black control knobs.
- Canvas covers for built-in and cart applications.
- Insulating liner for built-in application.
- Stainless steel accessory doors and drawers for built-in enclosure.



Model OG36 Outdoor Gas Grill

Accessories are available through your authorized Wolf dealer. For local dealer information, visit the find a showroom section of our website, wolfappliance.com.




Model OG36 shown with portable grill cart.



36" Outdoor Gas Grill

OVERALL DIMENSIONS

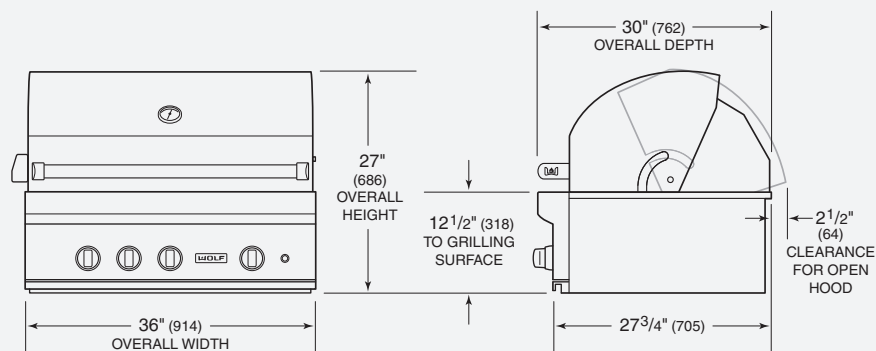

Unit dimensions may vary by $\pm 1/8$ ".


SPECIFICATIONS

Exterior Finish	Stainless Steel
Overall Width	36"
Overall Height	27"
Overall Depth	30"
Burner Rating	
Grill Burners	25,000 Btu
Sear Zone	25,000 Btu
Rotisserie Burner	14,000 Btu
Electrical Requirements	110/120 V AC 60 Hz, 15 amp circuit
Power Cord	6' cord with grounded plug
Shipping Weight	247 lbs

INSTALLATION SPECIFICATIONS

Non-Combustible Enclosure

Combustible Enclosure with Liner

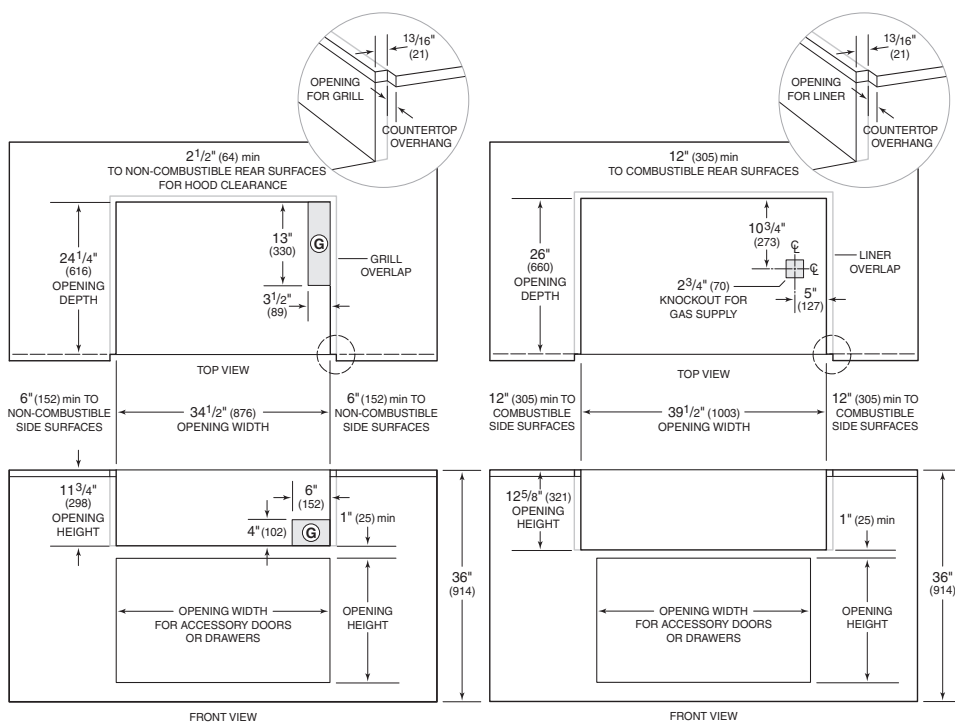

INSTALLATION NOTES

The Wolf outdoor gas grill is designed for easy placement into a built-in enclosure. Minimum clearances must be maintained as shown in the illustrations.

Complete installation specifications can be found on our website, wolfappliance.com.

Dimensions in parentheses are in millimeters unless otherwise specified.



Frigidaire 70 Pint Capacity Dehumidifier

MODEL: FAD704DUD



White



MSRP: \$249.00

Specifications

Product Code: FAD704DUD
 Product Type: Dehumidifier
 Power Type: Electric
 Installation Type: Free-Standing
 UPC Code: 0-12505-27538-8
 Color: White

Certifications & Approvals

ENERGY STAR® Certified: Yes
 Safety Certification: UL (SA11089) / CSA
 (245337)

Performance

Dehumidification (Liters/Day): 33
 Dehumidification (Pints/Day): 70

AC Specifications

Air CFM (High): 330
 Bucket Full Indication: Yes
 Bucket Style: Front Pull Out
 Container Capacity (Pints): 16.3
 Continuous Drain Operation: Yes
 Digital Humidity Readout: Yes
 Fan Speed (Fan): 2
 Filter Access: Bottom Slide-Out
 Filter Check: Yes
 Low Temperature Operation: Yes
 Relative Humidity Range Manual: 35%–85%

Controls

Auto Shut-Off: Yes
 Control Location: Top Center
 Controls: Electronic

Electrical Specifications

Amps (Cool): 7.5
 Plug Type: 5-15P
 Power Cord Length: 6'
 Voltage Rating: 115V, 60Hz
 Watts (Cool): 765


General Specifications

Filter Type: Anti-Bact Mesh

Ironing Boards

Ironfix® Shelf-mounted

- Fits into a 24" wide x 14" deep space
- Rotates 180° degrees with seven pre-set positions
- Due to the absence of ball bearing slides, clothing remains free from grease or pinch point damage
- Mounts to a shelf with through bolts (included)

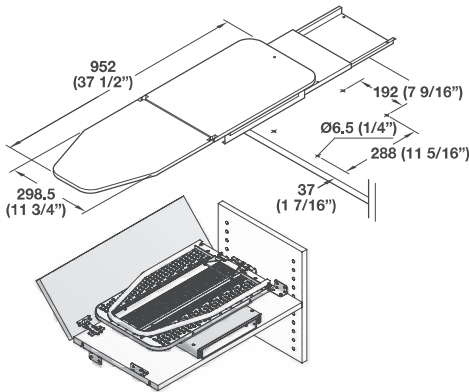

Ironfix™ Ironing Board

Height: **130 mm** (5 1/8")
Width: **520 mm**(20 1/2")
Depth: **350 mm** (13 3/4")
Extended board length is **952 mm** (37 1/2")
Material: steel, epoxy-coated
Cover: natural white cotton with gray stripes, foam backed

Color	Item No.
white RAL 9016	568.60.781


Packing: 1 set (includes installation hardware)

Replacement Heat-resistant Cover

- For ironing board with elastic band
- Material: natural cotton, foam backed

Color	Item No.
white/gray striped	568.60.907

Packing: 1 pc.

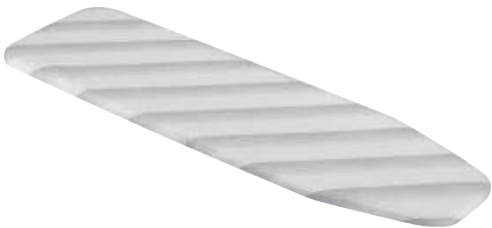

Dimensions in mm
Inches are approximate

[View Cart](#) [About](#) [My Account](#) [search](#)[Home](#) [Products](#) [Dealer Zone](#) [Customer Service](#) [Warranty](#) [Where To Buy](#)[Home](#) > [Products](#) > [Wall Safes](#) >
PWS-1814E[LARGER PHOTO](#)[Email a Friend](#)

Additional images:



Qty: 1

[add to cart](#) **MSRP: \$260.00****Availability:** Available**Description**

This safe is great for personal use at home or office. The PWS-1814E is equipped with a digital keypad for easy operation and maintenance.

Features

- Burglary Resistant wall safe with digital electronic locking system
- High quality VELVET INTERIOR
- Motorized locking bolt system will open the door automatically
- Designed to be installed between 16" o/c wall studs
- Approximately .44 cubic feet of storage space
- Key lock override system (2 keys included)
- Power override included
- Dual live motorized chrome bolts (3/4" dia.)
- Made of heavy duty gauge steel
- 2 Removable shelves
- Spring loaded door
- Flush digital keypad
- Door thickness is 5/8" formed steel

Specifications

- Exterior Dimensions: 14-1/8" (W) x 18-1/4" (H) x 3-7/8" (D)
- Interior Dimensions: 14" (W) x 18-1/8" (H) x 3" (D)
- Flange Size: 16" (W) x 20" (H)
- Anchor Holes: 3 per Side (6 Total)
- Cubic Inch: 0.44
- Weight: 28 Lbs.

User Manual

Click the image below to download the user manual

**Emergency Key***

Click the key image below to redirect to the order form



* Emergency key can be duplicated only. We cannot create Emergency key from a serial number, we must have a copy of the original key.

Related Items

NEW FW-1814Z

MSRP: \$384.00



Share your knowledge of this product. Be the first to write a review »

enter your email

Copyright © 2012 Protex Safe Co.. All Rights Reserved.
Powered By Volusion.

COMPANY INFO

[About Us](#)
[Contact Us](#)
[Privacy Policy](#)

DEALERS

[Login/Register](#)
[Shopping Cart](#)
[Order Status](#)

SITE MAPS

[Product Index](#)
[Category index](#)

CUSTOMER SERVICE

[Help](#)
[Shipping & Deliveries](#)
[Returns & Exchanges](#)


PRODUCT MODEL NUMBERS

WED7500V

Electrical: A four-wire or three-wire, single phase, 120/240-volt, 60 Hz, AC-only, electrical supply (or 120/208-volt electrical supply, if specified on the serial/rating plate) is required on a separate 30 amp circuit, fused on both sides of the line. A time-delay fuse or circuit breaker is recommended.

Exhaust venting: Exhaust your dryer to the outside. 4" (10.2 cm) diameter vent is required. Heavy metal exhaust vent must be used. Do not use plastic or metal foil vent. Exhaust outlet hood must be at least 12" (30.5 cm) from the ground or any object that may be in the path of the exhaust.


OVERALL DIMENSIONS

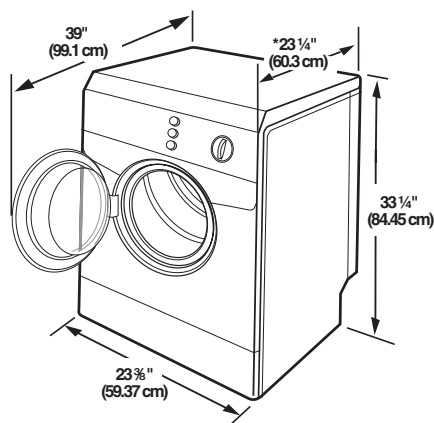


* Most installations require a minimum 5-1/2" (14.0 cm) clearance behind the dryer for the exhaust vent with elbows.

CUSTOM UNDERCOUNTER, RECESSED AREA AND CLOSET INSTALLATION

Custom undercounter installation - Dryer only

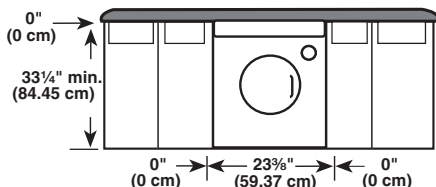


Recessed or closet installation - Dryer only

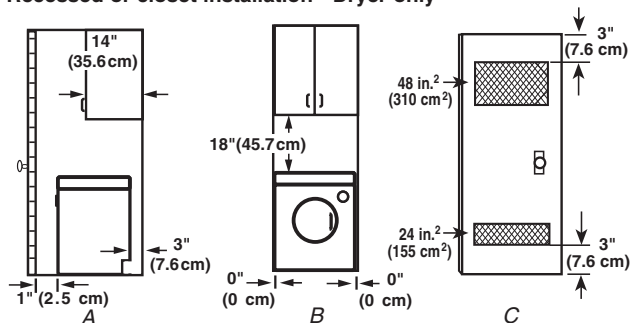

A. Side view - closet or confined area
B. Recessed area
C. Closet door with vents

Recessed or closet installation - Stacked with stack kit (Accessory)

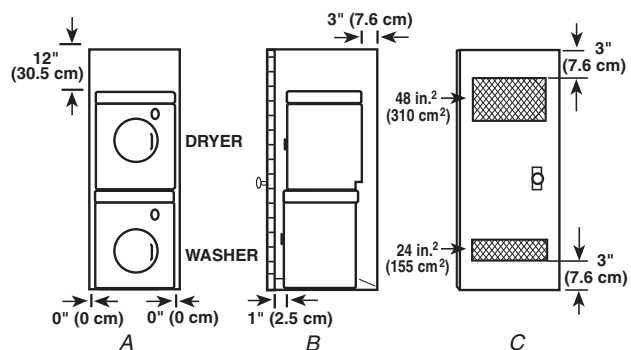

A. Recessed area
B. Side view - closet or confined area
C. Closet door with vents


EXHAUST VENTING

Vent material

- Use a heavy metal vent. Do not use plastic or metal foil vent.
- 4" (10.2 cm) heavy metal exhaust vent and clamps must be used.

Rigid metal vent

- For best drying performance, rigid metal vents are recommended.
- Rigid metal vent is recommended to avoid crushing and kinking.




4" (10.2 cm) heavy metal exhaust vent

Flexible metal vent

- Flexible metal vents are acceptable only if accessible for cleaning.
- Flexible metal vent must be fully extended and supported when the dryer is in its final location.
- Remove excess flexible metal vent to avoid sagging and kinking that may result in reduced airflow and poor performance.


Exhaust

Recommended hood styles are shown here.



A. Louvered hood style
B. Box hood style

The angled hood style (shown here) is acceptable.



- An exhaust hood should cap the vent to keep rodents and insects from entering the home.
- Exhaust hood must be at least 12" (30.5 cm) from the ground or any object that may be in the path of the exhaust (such as flowers, rocks or bushes, snow line, etc.).
- Do not use an exhaust hood with a magnetic latch.


Whirlpool® Front Loading Washer

PRODUCT MODEL NUMBERS

WFC7500V


Electrical: 120-volt, 60 Hz, AC-only, 15- or 20-amp, fused electrical supply. A time-delay fuse or circuit breaker and separate circuit is recommended.

OVERALL DIMENSIONS

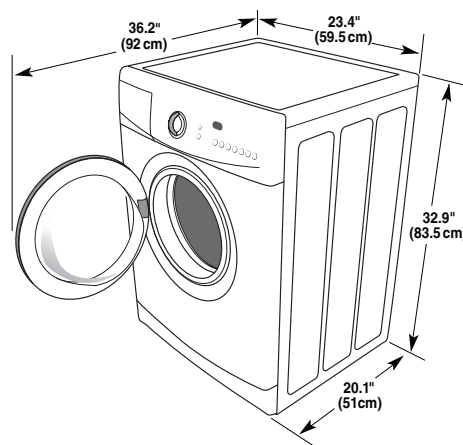


RECOMMENDED INSTALLATION SPACING FOR RECESSED OR CLOSET INSTALLATIONS, WITH OR WITHOUT A PEDESTAL

Dimensions shown are the recommended spacing.

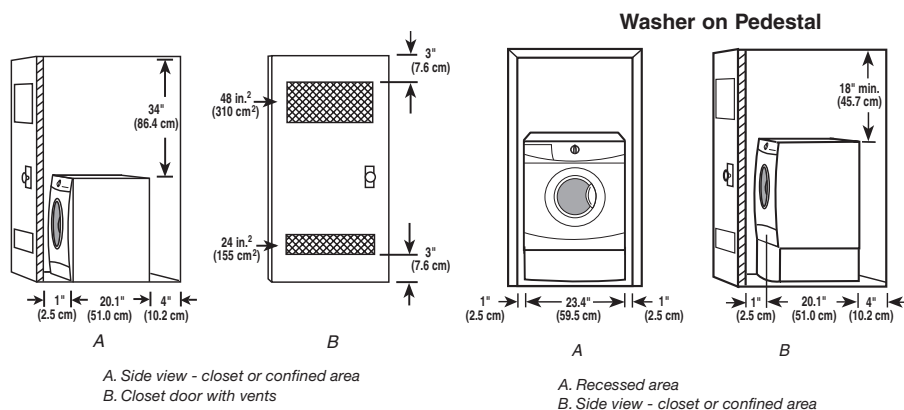


RECOMMENDED INSTALLATION SPACING FOR CABINET INSTALLATION

For cabinet installation, with a door, the minimum ventilation openings in the top are required.

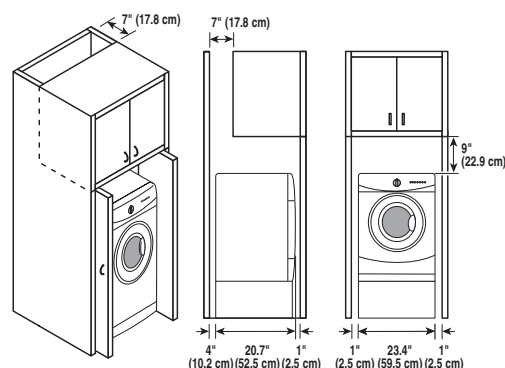


RECOMMENDED INSTALLATION SPACING FOR CUSTOM UNDERCOUNTER INSTALLATION

Dimensions shown are the recommended spacing.

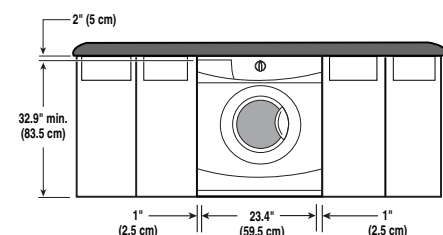

RECOMMENDED INSTALLATION SPACING FOR RECESSED OR CLOSET INSTALLATION, WITH STACKED WASHER AND DRYER

Dimensions shown are the recommended spacing.

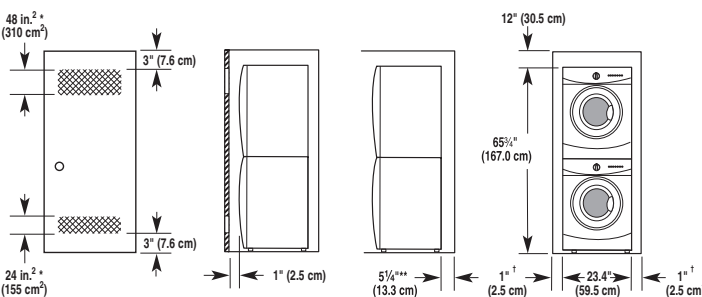

*Min. top and bottom air openings for closet door.

**External exhaust elbow requires additional space.


† Wall, door and floor molding may require additional spacing.

DRAIN SYSTEM OPTIONS

Standpipe drain system - wall or floor (view A & B)


The standpipe drain requires a minimum diameter standpipe of 2" (5 cm). The minimum carry-away capacity can be no less than 17 gal. (64 L) per minute.

The top of the standpipe must be at least 30" (76.2 cm) high and no higher than 96" (2.4 m) from the bottom of the washer.

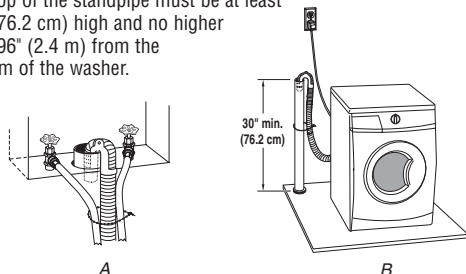

Laundry tub drain system (view A)


The laundry tub needs a minimum 20 gal. (76 L) capacity. The top of the laundry tub must be at least 30" (76.2 cm) above the floor.



Floor drain system (view B)

The floor drain system requires a siphon break that may be purchased separately.

The siphon break must be a minimum of 28" (71 cm) from the bottom of the washer. Additional hoses might be needed.





27" Wine Storage

Better wine storage conditions for the bottle ultimately means better enjoyment in the glass. Model 427G has a wine storage capacity of 132 (750 ml) bottles. Two independent storage zones maintain the temperature and humidity that wine — and wine lovers — require. The integrated design allows the unit to merge seamlessly into the décor, with no visible hinges or grilles.



FEATURES

- Custom front panels and hardware allow for infinite design options.
- Integrated design allows for dual installation with integrated unit.
- Full-size wine storage with individual temperature control of two separate compartments.
- Maintains ideal storing and serving temperature for all wines, humidity and UV protection.
- Temperature zones range from 39°F to 65°F.
- Full-view, UV-resistant glass door—high altitude glass available.
- Illuminated touch control panel.
- Discreet interior lighting.
- Wine shelves accommodate 750 ml bottles, half-bottles and magnums.
- Roller-glide wine shelves with natural cherrywood facing have three-quarter extension for easy access.
- Illuminated display shelf for prized bottles of wine.
- Can be connected to home security system.
- Star-K compliant with installation of a harness kit.

ACCESSORIES

- Stainless steel front panel with tubular or pro handle—80" or 84" finished height.
- Stainless steel tubular and pro handles.
- Dual installation kits for installation with integrated column, tall or drawer model.
- Door lock.

Accessories are available through your Sub-Zero dealer. For local dealer information, visit the find a showroom section of our website, subzero.com.

ENEMIES OF WINE

Heat – Two independent storage zones can be set in a range of 39°F to 65°F, with one-degree digital accuracy.

Light – UV resistant bronze tinted glass shields wines from harmful rays.

Humidity – Dual evaporators, one for each storage zone, maintain steady, moderate humidity.

Vibration – Sub-Zero's quiet compressor lets wines rest undisturbed. Shelves glide out smoothly, providing access without agitating the wine.



For additional information on the enemies of wine, visit www.subzerowine.com.





27" Wine Storage

OVERALL DIMENSIONS

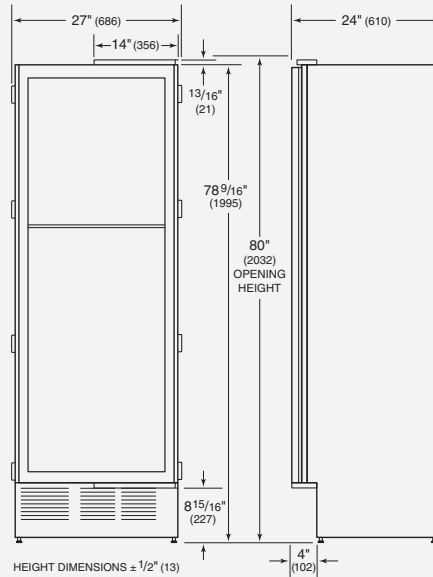

DIMENSIONS WILL VARY WITH PANEL THICKNESS

Overall dimensions do not include panels or handles.

Unit dimensions may vary by $\pm 1/8$ inch.

SPECIFICATIONS



Overall Width	27"
Overall Height	80"
Overall Depth	24"
Door Clearance	25 1/2"
Wine Storage Capacity	132 bottles*
Opening Width	27"
Opening Height	80"
Opening Depth	25"***
Electrical Requirements	115 V AC, 60 Hz 15 amp dedicated circuit
Shipping Weight	395 lbs

*750 ml bottles.

**Depth is 24" from the front of the unit to its back. Your design may necessitate moving the unit back, or cabinets forward to achieve a flush fit. This will require a minimum opening depth of 25".

INSTALLATION SPECIFICATIONS

Opening Dimensions

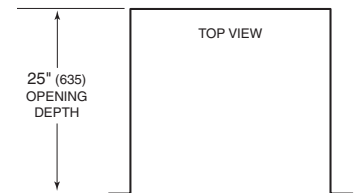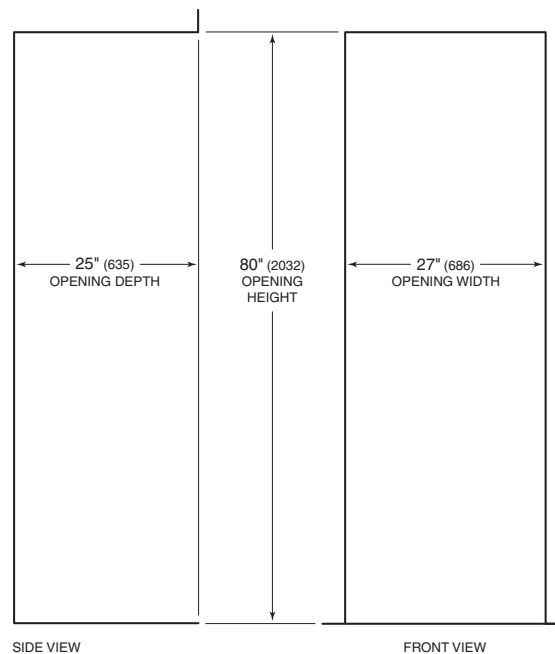


Dimensions in parentheses are in millimeters unless otherwise specified.

INSTALLATION NOTES

Stainless steel panels with handles are available as accessories. Panels can be ordered to include a lock. These panels are not installed at the factory.

Complete installation specifications, including panel sizes, can be found on our website, subzero.com/specs.

Location of Electrical Supply





Pro 27" Deep Wall Ventilation Hoods

Along with standard features like heat sentry and dual setting halogen lighting, the pro 27" deep wall hoods provide an additional exclusive feature — heat lamps. Pro 27" deep wall hoods are available in seven widths.



Model PW482718 shown.
Also shown is model DF484CG dual fuel range.

FEATURES

- Stainless steel finish.
- Heavy-duty, 16-gauge brushed stainless steel with continually welded seams, hemmed edges and sides.
- Stainless steel enclosed liner.
- Recessed easy-access controls.
- Infinite-speed blower control.
- Heat sentry feature automatically turns unit on when heat is sensed and automatically adjusts blower speed.
- Halogen lighting with two settings.
- Heat lamps — bulbs not included.
- Removable, dishwasher-safe, restaurant-grade stainless steel baffle filters.
- Transition with backdraft damper included.

MODEL OPTIONS

Model	PW302718	PW362718	PW422718	PW482718	PW542718	PW602718	PW662718
Overall Width	30"	36"	42"	48"	54"	60"	66"

BLOWER OPTIONS

CFM	INTERNAL				IN-LINE		REMOTE			
	500	600	900	1200	600	1100	600	900	1200	1500
PW302718		•	•		•	•	•	•	•	•
PW362718 PW422718		•	•		•	•	•	•	•	•
PW482718 PW542718			•	•	•	•	•	•	•	•
PW602718 PW662718				•	•	•	•	•	•	•

ACCESSORIES

- Internal, in-line and remote blowers (refer to chart above).
- 38" high stainless steel backsplash with or without warming racks.
- 6", 12", 18", 24" and 30" stainless steel duct covers.
- Horizontal discharge kit.

Accessories are available through your authorized Wolf dealer. For local dealer information, visit the find a showroom section of our website, wolfappliance.com.



Model PW602718 Pro Wall Hood



Recessed controls.




Heat lamps.



Pro 27" Deep Wall Ventilation Hoods

OVERALL DIMENSIONS

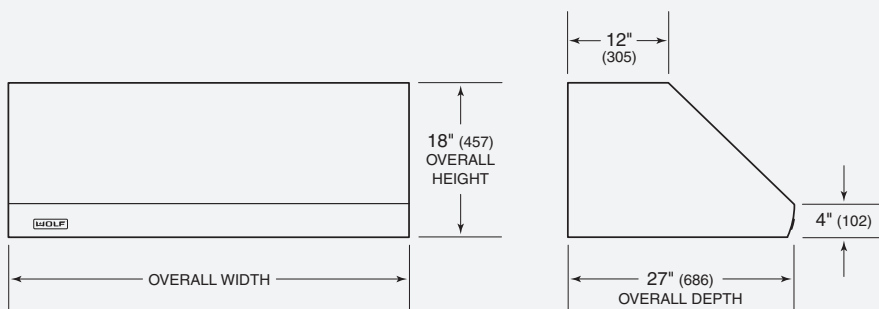


Unit dimensions may vary by $\pm 1/8$ ".

SPECIFICATIONS

Exterior Finish	Stainless Steel
Overall Widths	30", 36", 42", 48", 54", 60" and 66"
Overall Height	18"
Overall Depth	27"
Bottom of Hood to Countertop	30" to 36"
Discharge	Vertical or Horizontal*
Duct Size	10" Round
Electrical Requirements	110/120 V AC 60 Hz, 15 amp dedicated circuit
Shipping Weight	69–128 lbs

*Horizontal discharge applications require a horizontal discharge kit.

INSTALLATION SPECIFICATIONS

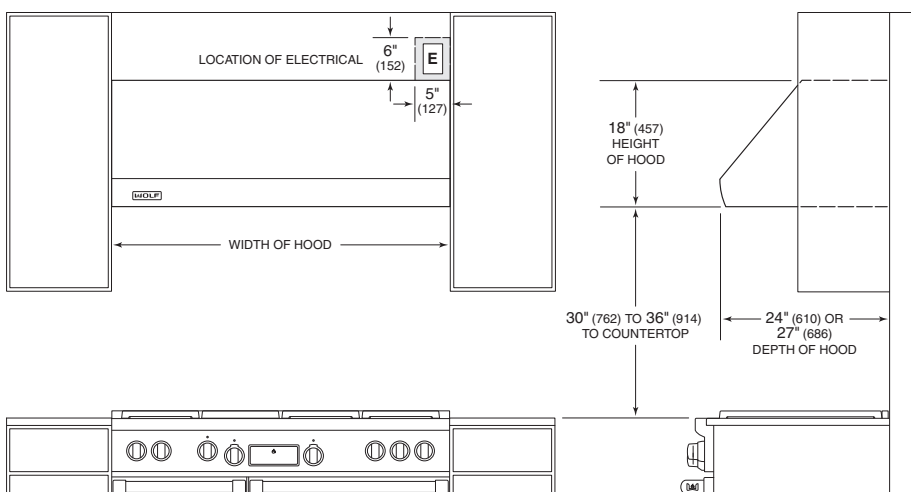

INSTALLATION NOTES

Pro 27" deep wall hoods are sold as a shell only. An internal, in-line or remote blower is required. For blower recommendations, visit our website, wolfappliance.com.

Pro 27" deep wall ventilation hoods are recommended for use with all Wolf cooking appliances.

Complete installation specifications can be found on our website, wolfappliance.com.

Dimensions in parentheses are in millimeters unless otherwise specified.

