**Bosch Dishwasher Model Lineup** 

# The quietest, most efficient dishwasher line in the U.S.



# What's special about German engineering is special about Bosch.

Bosch takes pride in our ability to overcome technological obstacles. We face these daunting challenges so we can produce world-class, intuitive machines that use fewer resources. And that's why we'll never be afraid of the work it takes to engineer the world's best machines.

Our vision comes directly from the words of Robert Bosch, whose vision is still being lived by employees everywhere. This spirit is also embedded in all our appliances, which help our customer's lives day after day.

### **Bosch Dishwasher Model Lineup**

From the 800 Plus series, also known as the quietest dishwasher in North America at 39 dBA, to the feature-laden Ascenta, Bosch delivers best-in-class quiet alongside advanced German engineering in its 2012 dishwasher lineup.




Standard series racks

4 cycles, 2 options

24/7 overflow protection





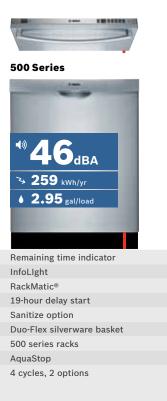




# **Quietest brand\***

As the quietest line of dishwashers in the U.S.,\* we've dedicated ourselves toward creating a consistently quiet washing environment for all our customers.

What's a decibel? Noise is measured in decibels (dBA). A whisper is about 30 dBA, and a normal conversation is about 60 dBA. A three-decibel increase is the noise equivalent of running two dishwashers at once\*\*

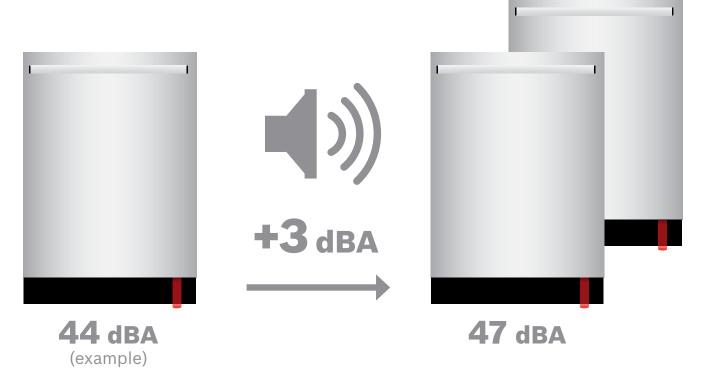

\*Bosch offers the quietest dishwashers in North America, and no major brand offers a quieter model at any Bosch price point. Price point defined by similarly priced and designed models of major brands, obtained from competitors' websites, January, 2012. \*\*Based on noise measured as acoustic power per IEC-standards.

# Anatomy of a quiet dishwasher.



Three level of sound-absorbing insulation



Spray arms conduct water towards your dishes, not the tub, reducing noise



Two brushless motors are practically frictionless







Solid moulded base absorbs sound while minimizing vibration

So quiet you need a light to tell when a cycle is running




#### InfoLight®

InfoLight

Your dishwasher will be so quiet, you won't know


it's on. That's why there's InfoLight, a small red light projected onto the floor to indicate that your dishwasher is running.

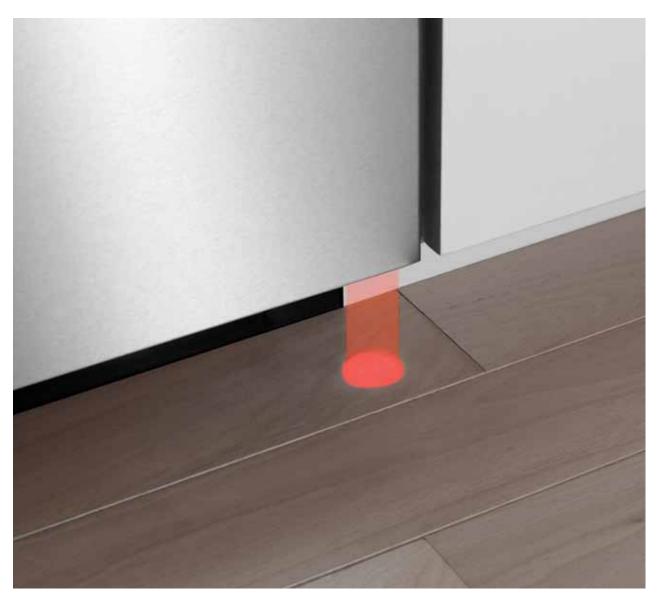

# Most water-efficient line of dishwashers in the U.S.\*

#### Most water-efficient

Bosch makes water work better by using less of it, as little as 2.22 gallons per cycle. Advanced systems combine for water efficiency that can save over 2 gallons per cycle compared to the industry average,\*\* without sacrificing cleaning performance. And we offer the most energy- and water-efficient line of dishwashers in the U.S.\*

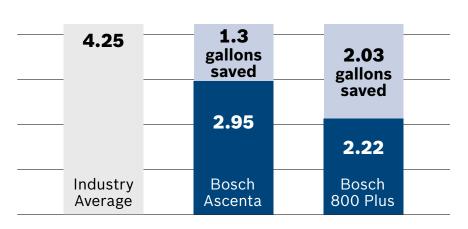

Bosch water usage vs. industry average usage, in gallons per regular wash cycle (2010, AHAM shipments).



Winning the 2011 ENERGY STAR® Award for Sustained Excellence was just the latest feather in Bosch's cap—after all, we've won two straight ENERGY STAR® Partner of the Year Awards.

\*Based on the average energy and water usage of leading brands, as calculated by ENERGY STAR®, January 2012. \*\*Class defined by similarly priced models and designs of major brands. Gallons saved figure is based on 2010 Association of Home Appliance Manufacturers (AHAM) Shipment Weighted Averages and minimum water usage of the normal cycle of the Bosch dishwasher.

# Most energy-efficient line of dishwashers in the U.S.\*



#### Most energy-efficient in the U.S.\*

Bosch dishwashers exceed ENERGY STAR® requirements by 14%. And Bosch's entire lineup is certified CEE Tier 2, which makes us eligible for all rebates.

#### **ActiveWater™**

Circulate two gallons of water into the cleaning power of more than 1,300.

#### Flow-through water heater

Bosch dishwashers channel 100% of the water through tight coils in a confined heating chamber, which heats the water

#### Half Load

Perfect for washing small, lightly soiled loads, this new cycle combines the Auto Wash cycle and sensor

decisions to dramatically reduce energy and water consumption.

<sup>\*</sup>Based on the average energy and water usage of leading brands, as calculated by ENERGY STAR®, January 2012.

# **German-engineered quality**

#### **Self-latching door**

The door holds at any position, and if your door is open less than 20°, the door will automatically close and latch shut.



#### **Quality testing**

All dishwashers go through 485 individual quality control tests before being shipped. Using water, the only brand to do so, we test our dishwashers through their traditional lifespan, up to 4,000 wash cycles, the equivalent of 10 years' use

#### Stainless steel tub

Bosch dishwashers' high-quality stainless steel construction retains heat better than plastic tubs, which helps dry dishes faster and more efficiently. They also come with a lifetime warranty against rust-through, because not all stainless steel tubs have the same quality.

#### Warranty

All Bosch dishwashers are backed by Good Housekeeping's two-year limited warranty for parts and labor, five years on all electronic components (parts only), five years on racks (parts only), and a lifetime warranty against rust-through on tub.\*

<sup>\*</sup>Certain limitations apply. See manufacturer's limited warranty for details.

# **Custom Panel Ready**



#### **Custom panel**

Pairing a custom cabinet panel with your dishwasher

amplifies your kitchen's look by giving it a minimalist, avant-garde feel. Its fully flush installation disappears into your cabinetry to make it the quietest show-off around.



# **Awards**



#### Ranked #1

Ranked #1 by a leading consumer publication 12 times over.



#### **Consumers Digest Best Buy**

The Ascenta SH\_3AR5\_UC has been selected for outstanding value based on performance, features and durability.



#### **Good Housekeeping Seal**

For more than 100 years, the Good Housekeeping Seal of Approval has been reassuring consumers that they've made the smart choice. Which is why we're proud that all Bosch dishwashers are backed by the Good Housekeeping Seal of Approval.



#### **Energy Star Partner of the Year**

Winning the 2011 ENERGY STAR® Award for Sustained Excellence was just the latest feather in Bosch's cap—after all, we've won two straight ENERGY STAR® Partner of the Year Awards.

# **Performance**



#### **Triple-filtration system**

The triple-filtration system uses a threestep process to remove even the finest dirt particles from the washing cycle, for sparkling-clean dishes and glasses every time. And all three filter elements are selfcleaning for worry-free operation.



#### Variable spray pressure

Higher and lower spray pressure allows for better load customiza-

tion and enhanced cleaning performance, based on the cycle that is selected.

#### **Extra-tall item sprinkler**

Hand-washing large items becomes a thing of the past, thanks to this handy innovation. Simply remove the top rack and place your serving platters, cookie sheets, hood filters and refrigerator shelves that are up to 22" high in the bottom rack.

#### **Auto Wash**

By detecting the amount of water and debris that is drained from the dishwasher each cycle, Auto Wash is able to optimize the amount of new water for following cycles, helping to maximize water and energy efficiency while maintaining top performance.

#### ActiveTab® system

Innovatively designed and integrated into the middle of the dishwasher, ActiveTab helps dissolve detergent tablets more efficiently and effectively.

# Helpful use tips

#### For best drying results

With 3 simple steps Bosch dishwashers can improve drying results by up to 45%.

- 1. Always use liquid rinse aid
- 2. Use Auto Cycle
- 3. Press Sanitize button

#### **Auto Wash**

-Bosch's recommended cycle customizes the wash cycle in 48 different cycle paths.

Alternating washing between upper and lower racks lets Bosch use half as much water.



# Convenience

#### RackMatic®

The RackMatic® upper-rack height adjustment allows for easy and comfortable adjustment of racks when loaded. It has two positions to enhance loading flexibility in regard to plate sizes and height of glasses and can be adjusted even when the racks are full.

#### Silverware basket

The removable silverware basket can be placed anywhere in the dishwasher, adding space for other items. Plus, the Duo-Flex basket can be split into two pieces, placed side by side or back to back, for the ultimate flexibility in loading.






# Capacity

Each Bosch dishwasher is designed to maximize space and flexibility. With all models able to hold up to **14-Place-Settings** in one load, you get the space you need to organize your dishes and clean them more efficiently.

# Leak protection

AquaStop®


turer to offer a high-tech leak-protection system in



their dishwashers. AquaStop is a precisely engineered tub and sensor system that detects leaks in the solid molded base of the dishwasher, shuts down operation and automatically pumps out water so it cannot make contact with the floor. This, along with Bosch's lifetime warranty against tub rust through, eliminates the risk of costly water damage.

#### 24/7 overflow protection

This Bosch Ascenta® exclusive senses leaks even when the dishwasher is turned off. In case the water level gets too high, the dishwasher pumps out the water in the tub and closes the water outlet valve.

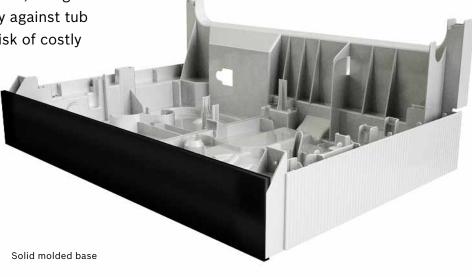

# **Safety**

#### **Concealed heating element**

Our concealed flow-through water heater prevents plastic items on the bottom rack from melting and protects you from accidental burns during unloading.

#### SaniDry<sup>™</sup> condensation drying system

There's also SaniDry condensation drying that makes drying more efficient and your dishes germ-free. By taking the air and heating it, Bosch dishwashers use superior technology to truly clean your dishes.

#### Sanitize option

By operating at a higher temperature, the sanitize option

meets National Sanitation Foundation (NSF) standards of cleanliness, eliminating 99.9% of bacteria, and enhances your drying results as well.



# Warranty

#### How long the warranty lasts

Bosch warrants its products are free from defects in materials and workmanship for a period of three hundred sixty five (365) days (i.e., 1 year) from the date of purchase. The foregoing timeline begins on the date of purchase, and shall not be stalled, tolled, extended, or suspended, for any reason whatsoever. Labor and shipping costs are included in this basic coverage.

#### **Extended Limited Warranties**

Bosch also provides these additional limited warranties:

#### Good Housekeeping 2-year Limited Warranty



For more than 100 years, the Good House-keeping Seal of Approval has been reassuring consumers that they've made the smart choice. Which is why we're proud that all Bosch dishwashers are backed by the Good Housekeeping Seal of Approval covering parts and labor required during the second year of ownership. www.ghseal.com

#### **5-year Limited Warranty on Electronics**

Bosch will repair or replace any Bosch microprocessor or printed circuit board if it proves to be defective in materials or workmanship (excludes labor charges).

## 5-year Limited Warranty on Dishwasher Racks

Bosch will replace the upper or lower dishwasher rack (excluding rack components), if the rack proves defective in materials or workmanship (excludes labor charges).

# Lifetime Warranty against Stainless Steel Rust Through

Bosch will replace your dishwasher with the same model or a current model that is substantially equivalent or better in functionality, if the inner liner should rust through (excludes labor charges). Bosch will replace the stainless steel door if the door should rust through (excludes labor charges).

# You won't hear it or see it.

Fully flush custom panel dishwashers can be used to seamlessly integrate your dishwasher into your kitchen.











#### **Custom cabinet-ready**

Match your kitchen's custom cabinetry to our dishwasher for a new level of sophistication.

#### **Fully flush look**

Bosch custom panel dishwashers are the only U.S. made dishwashers available that install fully flush for a seamless, integrated look.

#### **Easy installation**

Everything needed to install your custom panel comes in the box with your dishwasher.

#### Damage-proof


Bosch's unique SaniDry™ condensation drying eliminates the risk of steam damage over time to custom panel wood cabinetry and countertops. The closed system heats dishes with hot water from the final rinse.

# Bosch — the premier choice for custom panel.

Clean dishes. Clean lines. A flush Bosch look.

#### **Comparative Competitor Depth Chart**

| Depth by Brand* |          |            |           |         |             |  |  |  |  |  |
|-----------------|----------|------------|-----------|---------|-------------|--|--|--|--|--|
| A               | 22 1/16" | Miele      | <b>3</b>  | 25 1/2" | Kenmore     |  |  |  |  |  |
| ₿               | 223/8"   | Bosch      | <b>(3</b> | 261/2"  | Jenn-Air    |  |  |  |  |  |
| 0               | 223/4"   | Fagor      | <b>(3</b> | 24 5/8" | Electrolux  |  |  |  |  |  |
| <b>D</b>        | 235/8"   | Dacor      | <b>©</b>  | 24¾"    | GE Monogram |  |  |  |  |  |
| 3               | 24¾"     | KitchenAid |           |         |             |  |  |  |  |  |

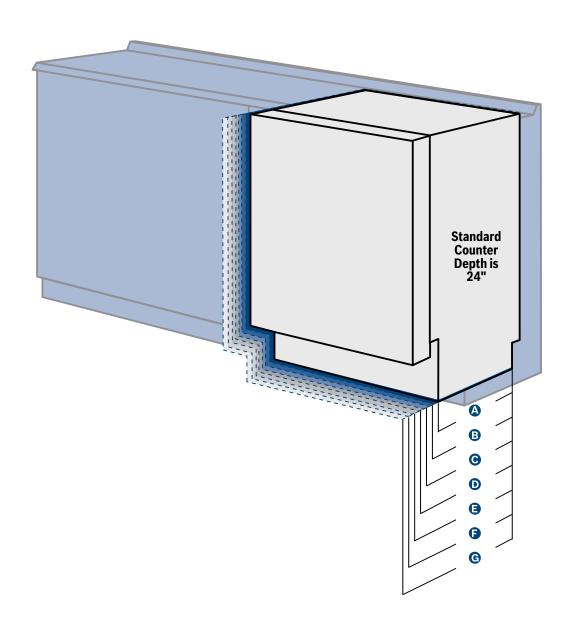


<sup>\*</sup>Installation dimensions considering ¾" custom door panel. Information from retailers website as of December 2011.

# **Planning for your Custom Panel Dishwasher**

Before installing a Bosch dishwasher, be sure to verify the cabinet dimensions, electrical connections and water connections. Always consult the installation manual included with the product for complete details before installing.

#### What to consider when installing a custom panel dishwasher

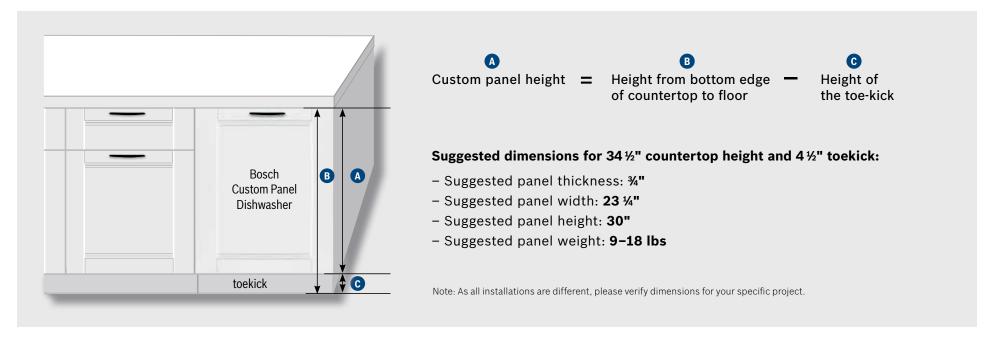

Bosch dishwashers are designed to be surrounded by standard residential kitchen cabinetry. If the dishwasher is to be installed in a corner, make sure that there is adequate clearance of 27" to open the door.

#### For SHV43R53UC, SHV55R53UC, and SHV68R53UC

- Minimum opening height: 34" (860 mm)
- Minimum opening width: 24" (610 mm) or 23 %" (600 mm) wide with decor strips removed

#### **Planning for your Custom Panel Dishwasher**

#### **Installation options**

Custom panel models allow you to have a door panel made to match your cabinetry. The door panel can be a two-piece design (model 1) to look like a drawer at the top and a cabinet door at the bottom or a single full-length door (model 2). A template is included with the custom panel models to explain the mounting procedure. Additional templates can be ordered by calling customer service at 1-800-944-2904.

NOTE: The door springs that are included with the custom panel units will provide proper function for custom door panels weighing between 9 and 18 pounds. SHV43R53UC, SHV55R53UC, and SHV68R53UC allow you to adjust the screw tension to accommodate for the weight of the door panel.



# 18" Dishwashers—a convenient, slim design.

18" dishwashers offer powerful dish cleaning convenience in spite of space constraints. Perfect for bars, butler pantries or even as a second dishwasher in the kitchen.

#### Large capacity in a small space


Our 18" dishwashers offer large cleaning capacity in a small space. They hold nine place settings. Dishwashers can be ordered stainless or custom panel ready, and fit both U.S. and E.U. countertop and toekick heights. In addition, all of our 18" dishwashers meet ADA requirements.



# **Planning for your 18" Dishwasher**

Before installing a Bosch dishwasher, be sure to verify the cabinet dimensions, electrical connections and water connections. Always consult the installation manual included with the product for complete details before installing.

### **18" Dishwasher Options**

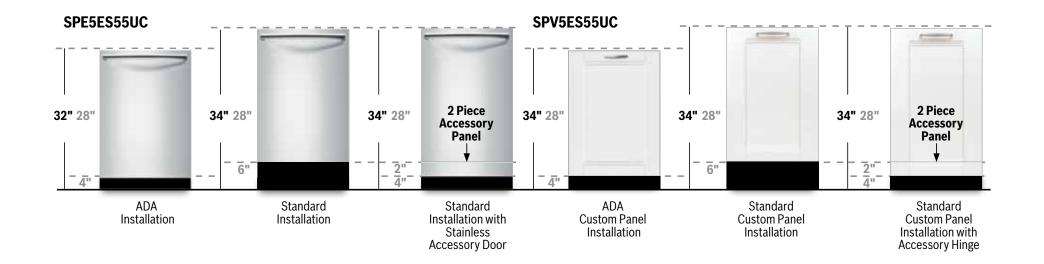

### **ADA Dishwashers**

Bosch's ADA dishwashers are uniquely designed for customers with special height requirements.

Bosch's ADA dishwashers are among the most flexible we have to offer. These dishwashers offer a large load capacity while featuring shorter tub dimensions that allow for easy installation. Install for traditional ADA use or at a higher position for a 6½" toekick that allows for a polished European look. This easily integrates into residential and commercial kitchens.



### **Bosch Dishwasher Style Options**

All models available with bar handle or recessed handle.











|  | 800 Series              |                                |     | Lowe's Item#   | 800 Series   |  |   | Lowe's Item#   |  |
|--|-------------------------|--------------------------------|-----|--|--|--|---|--|--|
| Model Numbers  | SHX98M09UC              | Stainless Steel                | bar | 163356   | SHE68R55UC<br>SHE68R52UC<br>SHE68R56UC<br>SHX68R55UC<br>SHX68R52UC<br>SHX68R56UC<br>SHV68R53UC | Stainless Steel<br>White<br>Black<br>Stainless Steel<br>White<br>Black<br>Custom Panel | recessed<br>recessed<br>recessed<br>bar<br>bar<br>bar | 353954<br>353953<br>353955<br>353974<br>353973<br>353976<br>353958 |  |
| Appearance   | Stainless Steel Tall Tu | ub                             |     |  | Stainless Steel Tall Tu  | ıp   |   |  |  |
| N. In a second s | Nine Wash Cycles and    | d Two Options                  |     |  | Six Wash Cycles and  | Three Options  |   |  |  |
|  | Real Stainless Steel F  | Fascia Panel                   |     |  | Real Stainless Steel F   | ascia Panel*   |   |  |  |
|  | Full Text LCD Display   |                                |     |  | Full Text LCD Display  |  |   |  |  |
| Quietness  | Virtually Silent: 42 dE | ВА                             |     | Virtually Silent: 44 de                              | 3A   |  |   |  |  |
| <del></del>  | Solid Base Contains S   | Sound and Prevents Leaks       |     | Solid Base Contains                                  | Sound and Prevents Leaks   |  |   |  |  |
|  | InfoLight® Cycle Indic  | cator LED                      |     |  | InfoLight® Cycle India   | cator LED  |   |  |  |
| Efficiency   | Saves 290 Gallons of    | Water Each Year                |     |  | Saves 290 Gallons of Water Each Year   |  |   |  |  |
|  | 190 kWh/yr-ENERGY       | / STAR® Qualified              |     |  | 234 kWh/yr-ENERGY STAR® Qualified  |  |   |  |  |
|  | Exceeds ENERGY STA      | AR® Requirements for Water by  |     | Exceeds ENERGY STAR® Requirements for Water by 72%   |  |  |   |  |  |
|  | EcoSense® Reduces E     | Energy Usage up to 20%         |     | EcoSense® Reduces Energy Usage up to 20%             |  |  |   |  |  |
|  |                         |                                |     |  | Half-load Option for S   | Small Loads  |   |  |  |
| Safety   | AquaStop® Leak Prote    | ection                         |     |  | AquaStop® Leak Protection  |  |   |  |  |
|  | NSF-certified-Elimina   | nates 99.9% of Bacteria        |     |  | NSF-certified—Eliminates 99.9% of Bacteria   |  |   |  |  |
|  | Sanitize Option Remo    | oves Bacteria and Enhances Dry |     | Sanitize Option Removes Bacteria and Enhances Drying |  |  |   |  |  |
| Capacity   | 14-place-setting Capa   | acity                          |     |  | 14-place-setting Capacity  |  |   |  |  |
| 1 · · · · · · · · · · · · · · · · · · ·  | 800 Series Racks with   | h Flexible Silverware Basket   |     |  | 800 Series Racks with Duo-Flex Silverware Basket   |  |   |  |  |
|  | RackMatic® Automatic    | ically Adjustable Upper Rack   |     |  | RackMatic® Automatically Adjustable Upper Rack   |  |   |  |  |
|  | Extra-tall-item Sprink  | der Cleans Items 22" Tall      |     |  | Extra-tall-item Sprink   | ler Cleans Items 22" Tall  |   |  |  |
| Convenience  | Multi-function LED wi   | ith Remaining Time             |     |  | Multi-function LED w   | ith Remaining Time   |   |  |  |
|  | 24-hour Delay Start T   | Timer                          |     |  | 19-hour Delay Start T  | imer   |   |  |  |
|  | Express Wash-In 30      | Minutes or Less                |     |  | Express Wash-In 30   | Minutes or Less  |   |  |  |
|  | Auto Delicate for Fine  | e China                        |     |  |  |  |   |  |  |
|  | Glass Care Cycle for F  | Fine Glassware                 |     |  |  |  |   |  |  |
| Performance  | Variable Spray Pressu   | ure                            |     |  | Variable Spray Pressu  | ıre  |   |  |  |
|  | Load Size Sensor Aut    | tomates Wash Cycle             |     |  |  |  |   |  |  |

<sup>\*</sup>Applies on SHX and SHV models.











|               | 500 Series   |  |   | Lowe's Item#   | 500 Series   | Lowe's Item#   |  |  |
|---------------|--|--|---|--|--|----------------|--|--|
| Model Numbers | SHE55R55UC<br>SHE55R52UC<br>SHE55R56UC<br>SHX55R55UC<br>SHX55R52UC<br>SHX55R56UC<br>SHV55R53UC | Stainless Steel<br>White<br>Black<br>Stainless Steel<br>White<br>Black<br>Custom Panel | recessed<br>recessed<br>recessed<br>bar<br>bar<br>bar | 353949<br>353948<br>353951<br>115652<br>353970<br>353971<br>353957 | SHE55RF5UC Stainless Steel reces                   | sed 371809     |  |  |
| Appearance    | Stainless Steel Tall Tub   |  |   |  | Stainless Steel Tall Tub                           |                |  |  |
|               | Four Wash Cycles and Two   | o Options  |   |  | Five Wash Cycles and Three Options                 |                |  |  |
|               | Real Stainless Steel Fascia  | a Panel*   |   |  | Stainless Steel Look Fascia Panel                  |                |  |  |
|               |  |  |   |  | Full Text LCD Display                              |                |  |  |
| Quietness     | Virtually Silent: 46 dBA   |  |   |  | Virtually Silent: 46 dBA                           |                |  |  |
|               | Solid Base Contains Soun   | d and Prevents Leaks   |   |  | Solid Base Contains Sound and Prevents Leaks       |                |  |  |
|               | InfoLight® Cycle Indicator   | LED  |   |  | InfoLight® Cycle Indicator LED                     |                |  |  |
| Efficiency    | Saves 280 Gallons of Water   | er Each Year   |   |  | Saves 280 Gallons of Water Each Year               |                |  |  |
|               | 259 kWh/yr-ENERGY STA  | R® Qualified   |   |  | 259 kWh/yr-ENERGY STAR® Qualified                  |                |  |  |
|               | Exceeds ENERGY STAR® R   | equirements for Water by 69%   |   |  | Exceeds ENERGY STAR® Requirements for Water by 69% |                |  |  |
|               | EcoSense® Reduces Energ  | gy Usage up to 20%   |   |  | EcoSense® Reduces Energy Usage up to 20%           |                |  |  |
|               | Half-load Cycle for Small I  | Loads  |   |  | Half-load Option for Small Loads                   |                |  |  |
| Safety        | AquaStop® Leak Protectio   | n  |   |  | AquaStop® Leak Protection                          |                |  |  |
|               | NSF-certified-Eliminates   | 99.9% of Bacteria  |   |  | NSF-certified—Eliminates 99.9% of Bacto            | eria           |  |  |
|               | Sanitize Option Removes  | Bacteria and Enhances Drying   |   |  | Sanitize Option Removes Bacteria and E             | nhances Drying |  |  |
| Capacity      | 14-place-setting Capacity  |  |   |  | 14-place-setting Capacity                          |                |  |  |
|               | 500 Series Racks with Due  | o-Flex Silverware Basket   |   |  | 300 Series Racks with Duo-Flex Silverwa            | re Basket      |  |  |
|               | RackMatic® Automatically   | Adjustable Upper Rack  |   |  | Manual Height Adjustment Upper Rack                |                |  |  |
|               | Extra-tall-item Sprinkler C  | leans Items 22" Tall   |   |  | Extra-tall-item Sprinkler Cleans Items 22          | " Tall         |  |  |
| Convenience   | Multi-function LED with R  | emaining Time  |   |  | Multi-function LED with Remaining Time             |                |  |  |
|               | 19-hour Delay Start Timer  |  |   |  | 19-hour Delay Start Timer                          |                |  |  |
|               |  |  |   |  | Express Wash-In 30 Minutes or Less                 |                |  |  |
|               |  |  |   |  | Delicate Wash for Fine China                       |                |  |  |

<sup>\*</sup>Applies on SHX and SHV models.





Top-rated by a leading consumer publication.\*



|               | 500 Series   |                                   |                                  | Lowe's Item#               | 300 Series  |                                   |                                  | Lowe's Item#            |  |
|---------------|--|-----------------------------------|----------------------------------|----------------------------|---|-----------------------------------|----------------------------------|-------------------------|--|
| Model Numbers | SHE55M15UC<br>SHE55M12UC<br>SHE55M16UC             | Stainless Steel<br>White<br>Black | recessed<br>recessed<br>recessed | 153358<br>121759<br>121765 | SHE43RF5UC<br>SHE43RF2UC<br>SHE43RF6UC                                | Stainless Steel<br>White<br>Black | recessed<br>recessed<br>recessed | 99488<br>97887<br>99625 |  |
| Appearance    | Stainless Steel Tall 1                             | ГиЬ                               |                                  |                            | Stainless Steel Tall Tub  |                                   |                                  |                         |  |
|               | Five Wash Cycles an                                | d Three Options                   |                                  |                            | Four Wash Cycles and C  | ne Option                         |                                  |                         |  |
|               | Stainless Steel Look                               | Fascia Panel                      |                                  |                            |   |                                   |                                  |                         |  |
| Quietness     | Virtually Silent: 47 d                             | İBA                               |                                  |                            | Virtually Silent: 48 dBA  |                                   |                                  |                         |  |
|               | Solid Base Contains                                | Sound and Prevents Lea            | ks                               |                            | Solid Base Contains Sou   | und and Prevents Leaks            |                                  |                         |  |
|               |  |                                   |                                  |                            | InfoLight® Cycle Indicat  | or LED                            |                                  |                         |  |
| Efficiency    | Saves 280 Gallons o                                | f Water Each Year                 |                                  |                            | Saves 280 Gallons of Wa   | ater Each Year                    |                                  |                         |  |
|               | 259 kWh/yr-ENERG                                   | SY STAR® Qualified                |                                  |                            | 259 kWh/yr-ENERGY S   | TAR® Qualified                    |                                  |                         |  |
|               | Exceeds ENERGY STAR® Requirements for Water by 69% |                                   |                                  |                            | Exceeds ENERGY STAR® Requirements for Water by 69%                    |                                   |                                  |                         |  |
|               | EcoSense® Reduces                                  | Energy Usage up to 20%            |                                  |                            | EcoSense® Reduces Energy Usage up to 20%                              |                                   |                                  |                         |  |
|               | Half-load Option for                               | Small Loads                       |                                  |                            |   |                                   |                                  |                         |  |
| Safety        | AquaStop® Leak Pro                                 | tection                           |                                  |                            | AquaStop® Leak Protection   |                                   |                                  |                         |  |
|               | NSF-certified-Elimi                                | nates 99.9% of Bacteria           |                                  |                            | NSF-certified—Eliminates 99.9% of Bacteria                            |                                   |                                  |                         |  |
|               |  |                                   |                                  |                            | Sanitize Option Remove  | s Bacteria and Enhances           | Drying                           |                         |  |
| Capacity      | 14-place-setting Cap                               | pacity                            |                                  |                            | 14-place-setting Capacit  | ty                                |                                  |                         |  |
|               | 800 Series Racks wi                                | th Duo-Flex Silverware B          | asket                            |                            | 300 Series Upper and Lower Standard Racks with Long Silverware Basket |                                   |                                  |                         |  |
|               | RackMatic® Automat                                 | tically Adjustable Upper F        | tack                             |                            | Manual Height Adjustment Upper Rack                                   |                                   |                                  |                         |  |
|               | Extra-tall-item Sprin                              | kler Cleans Items 22" Tal         |                                  |                            |   |                                   |                                  |                         |  |
| Convenience   | Multi-function LED v                               | with Remaining Time               |                                  |                            |   |                                   |                                  |                         |  |
|               | 19-hour Delay Start                                | Timer                             |                                  |                            |   |                                   |                                  |                         |  |
|               | Quick Wash-In 30 N                                 | Minutes or Less                   |                                  |                            | Express Wash—In 30 Minutes or Less                                    |                                   |                                  |                         |  |
|               | Delicate Wash for Fi                               | ne China                          |                                  |                            |   |                                   |                                  |                         |  |

<sup>\*</sup>Ratings from 2012 based on washing performance, and includes energy and water use, noise, loading flexibility, cycle time, and ease of use.











| Bar |  |  |
|-----|--|--|
|     |  |  |

|               | Bui  | Hallaic   |                   | Customi and                                  |   | Dai nanc                      | aic |              |
|---------------|--|---|-------------------|--|---|-------------------------------|-----|--------------|
|               | 300 Series   |   |                   | Lowe's Item#                                 | 300 Series  |                               |     | Lowe's Item# |
| Model Numbers | SHX43R55UC<br>SHX43R52UC<br>SHX43R56UC<br>SHV43R53UC | Stainless Steel<br>White<br>Black<br>Custom Panel | bar<br>bar<br>bar | 353967<br>353966<br>353968<br>353956         | SHX33RF5UC  | Stainless Steel               | bar | 115076       |
| Appearance    | Stainless Steel Tal                                  | II Tub  |                   |  | Stainless Steel Tall 1  | Гub                           |     |              |
|               | Four Wash Cycles                                     | and One Option                                    |                   | Four Wash Cycles ar                          | nd One Option   |                               |     |              |
|               |  |   |                   |  |   |                               |     |              |
| Quietness     | Virtually Silent: 48 dBA                             |   |                   |  | Virtually Silent: 50 d  | IBA                           |     |              |
|               | Solid Base Contai                                    | ns Sound and Prevents Leak                        |                   | Solid Base Contains Sound and Prevents Leaks |   |                               |     |              |
|               | InfoLight® Cycle In                                  | ndicator LED                                      |                   |  |   |                               |     |              |
| Efficiency    | Saves 280 Gallons of Water Each Year                 |   |                   |  | Saves 280 Gallons of Water Each Year                                  |                               |     |              |
|               | 259 kWh/yr-ENEF                                      | RGY STAR® Qualified                               |                   |  | 259 kWh/yr-ENERG  | Y STAR® Qualified             |     |              |
|               | Exceeds ENERGY                                       | STAR® Requirements for Wat                        | er by 69%         |  | Exceeds ENERGY ST   | AR® Requirements for Water by | 69% |              |
|               | EcoSense® Reduce                                     | es Energy Usage up to 20%                         |                   |  | EcoSense® Reduces Energy Usage up to 20%                              |                               |     |              |
|               | Half-load Cycle for                                  | r Small Loads                                     |                   |  |   |                               |     |              |
| Safety        | AquaStop® Leak Protection                            |   |                   |  | AquaStop® Leak Protection   |                               |     |              |
|               | NSF-certified-Elir                                   | minates 99.9% of Bacteria                         |                   |  | NSF-certified—Eliminates 99.9% of Bacteria                            |                               |     |              |
|               | Sanitize Option Re                                   | emoves Bacteria and Enhanc                        | es Drying         |  | Sanitize Option Removes Bacteria and Enhances Drying                  |                               |     |              |
| Capacity      | 14-place-setting C                                   | apacity   |                   |  | 14-place-setting Cap  | pacity                        |     |              |
|               | 300 Series Racks with Long Silverware Basket         |   |                   |  | 300 Series Upper and Standard Lower Racks with Long Silverware Basket |                               |     |              |
|               | Manual Height Adj                                    | justment Upper Rack                               |                   |  | Manual Height Adjus   | stment Upper Rack             |     |              |
| Convenience   |  |   |                   |  | Express Wash-In 30  | ) Minutes or Less             |     |              |
|               |  |   |                   |  |   |                               |     |              |
|               |  |   |                   |  |   |                               |     |              |









|               |  | Recessed na                               | andic             |                            | 1100030  | sea nanaie   |   | bar nanule   |  |
|---------------|--|---|-------------------|----------------------------|--|--|---|--|--|
|               | Ascenta®                               |   |                   | Lowe's Item#               | Ascenta®   |  |   | Lowe's Item#   |  |
| Model Numbers | SHE3ARF5UC<br>SHE3ARF2UC<br>SHE3ARF6UC | Stainless Steel<br>White<br>Black         | bar<br>bar<br>bar | 353026<br>353032<br>353023 | SHE3AR75UC<br>SHE3AR72UC<br>SHE3AR76UC<br>SHX3AR75UC<br>SHX3AR72UC<br>SHX3AR76UC | Stainless Steel<br>White<br>Black<br>Stainless Steel<br>White<br>Black | recessed<br>recessed<br>recessed<br>bar<br>bar<br>bar | 353946<br>353941<br>353947<br>353964<br>353962<br>353965 |  |
| Appearance    | Stainless Steel Tall                   | Tub w/PP*                                 |                   |                            | Stainless Steel Tall   | Tub w/ PP*   |   |  |  |
|               | Six Wash Cycles an                     | nd Two Options                            |                   |                            | Six Wash Cycles an   | nd Two Options   |   |  |  |
| Quietness     | Virtually Silent: 50                   | dBA                                       |                   |                            | Virtually Silent: 50   | dBA  |   |  |  |
|               | Solid Base Contain                     | s Sound and Prevents Leaks                |                   |                            | Solid Base Contain   | s Sound and Prevents Leaks   | i   |  |  |
| Efficiency    | Saves 280 Gallons                      | of Water Each Year                        |                   |                            | Saves 280 Gallons  | of Water Each Year   |   |  |  |
|               | 279 kWh/yr-ENER                        | GY STAR® Qualified                        |                   |                            | 279 kWh/yr-ENER  | GY STAR® Qualified   |   |  |  |
|               | Exceeds ENERGY S                       | TAR® Requirements for Wate                | r by 69%          |                            | Exceeds ENERGY S   | STAR® Requirements for Wate  | er by 69%   |  |  |
|               | EcoSense® Reduce                       | s Energy Usage up to 20%                  |                   |                            | EcoSense® Reduce   | s Energy Usage up to 20%   |   |  |  |
|               |  |   |                   |                            | Half-load Option fo  | or Small Loads   |   |  |  |
| Safety        | Bosch Exclusive 24                     | /7 Overflow Leak Protection               |                   |                            | Bosch Exclusive 24   | 1/7 Overflow Leak Protection   |   |  |  |
|               | NSF-certified-Elim                     | ninates 99.9% of Bacteria                 |                   |                            | NSF-certified—Elim   | ninates 99.9% of Bacteria  |   |  |  |
|               | Sanitize Option Rei                    | moves Bacteria and Enhance                | s Drying          |                            | Sanitize Option Re   | moves Bacteria and Enhance   | es Drying   |  |  |
| Capacity      | 14-place-setting Ca                    | apacity                                   |                   |                            | 14-place-setting Capacity  |  |   |  |  |
|               | 300 Series Racks w                     | vith Duo-Flex Silverware basl             | cet.              |                            | 300 Series Upper a   | and Standard Lower Racks w   | rith Long Silverware Ba                               | sket   |  |
|               | Manual Height Adju                     | ustment Upper Rack                        |                   |                            | Manual Height Adju   | ustment Upper Rack   |   |  |  |
| Convenience   | Multi-function LED                     | with Remaining Time                       |                   |                            | Multi-function LED   | with Remaining Time  |   |  |  |
|               | Three-, Six-, Nine-h                   | Three-, Six-, Nine-hour Delay Start Timer |                   |                            |  | Three-, Six-, Nine-hour Delay Start Timer                              |   |  |  |
|               | Express Wash-In 3                      | Express Wash—In 30 Minutes or Less        |                   |                            |  | Express Wash-In 30 Minutes or Less                                     |   |  |  |
|               | Self-latching Door                     | Stays Put and Latches                     |                   |                            | Self-latching Door   | Stays Put and Latches  |   |  |  |
|               |  |   |                   |                            | Delicate Wash for F  | Fine China   |   |  |  |
| Performance   | Variable Spray Pres                    | ssure                                     |                   |                            | Variable Spray Pres  | ssure  |   |  |  |

<sup>\*</sup>Polypropylene.







| Bar | han |
|-----|-----|

|               | Ascenta®   |   |   | Lowe's Item#   |  |  |  |  |
|---------------|--|---|---|--|--|--|--|--|
| Model Numbers | SHE3AR55UC<br>SHE3AR52UC<br>SHE3AR56UC<br>SHX3AR55UC<br>SHX3AR52UC<br>SHX3AR56UC   | Stainless steel<br>White<br>Black<br>Stainless Steel<br>White<br>Black              | recessed<br>recessed<br>recessed<br>bar<br>bar<br>bar | 112518<br>103349<br>112519<br>353960<br>353959<br>353961 |  |  |  |  |
| Appearance    | Stainless Steel Tall Four Wash Cycles a  | ·   |   |  |  |  |  |  |
| Quietness     | Virtually Silent: 50   | Virtually Silent: 50 dBA  |   |  |  |  |  |  |
| Efficiency    | Saves 280 Gallons of Water Each Year  279 kWh/yr—ENERGY STAR® Qualified  Exceeds ENERGY STAR® Requirements for Water by 69%  EcoSense® Reduces Energy Usage up to 20%  Half-load Cycle for Small Loads |   |   |  |  |  |  |  |
| Safety        | NSF-certified—Elim   | /7 Overflow Leak Protection<br>inates 99.9% of Bacteria<br>moves Bacteria and Enhan |   |  |  |  |  |  |
| Capacity      | 14-place-setting Ca  | pacity<br>th Long Silverware Basket   |   |  |  |  |  |  |
| Convenience   |  | our Delay Start Timer<br>Stays Put and Latches                                      |   |  |  |  |  |  |

<sup>\*</sup>Polypropylene.

## **Special Application Dishwasher Specifications**










|               | Dai nandic   | Trecessed I  | andic   | Customi anei               |   | nece  | essed nandle         |                  |  |
|---------------|--|--|---|----------------------------|---|---|----------------------|------------------|--|
|               | ADA Compliant 18"                                    | •  |   | Lowe's Item#               | ADA Compliant                                 | 24"   |                      | Lowe's Item#     |  |
| Model Numbers | SPX5ES55UC<br>SPE5ES55UC<br>SPV5ES53UC               | Stainless Steel<br>Stainless Steel<br>Custom Panel | bar<br>recessed                                     | 123113<br>122767<br>122760 | SGE63E15UC<br>SGE63E06UC                      | Stainless Steel<br>Black                        | recessed<br>recessed | 354837<br>122512 |  |
| Appearance    | Stainless Steel Euro Tu                              | b (Shorter Height)                                 |   |                            | Stainless Steel Euro                          | Tub (Shorter Height)                            |                      |                  |  |
|               | Five Wash Cycles and T                               | Two Options  |   |                            | Six Wash Cycles and                           | d Five Options                                  |                      |                  |  |
|               | ADA-compliant for Lower                              | r Countertop Installation                          |   |                            | ADA-compliant for Lo                          | ower Countertop Installation                    |                      |                  |  |
| Quietness     | Virtually Silent: 49 dBA                             | 1  |   |                            | Virtually Silent: 49                          | dBA   |                      |                  |  |
|               | Solid Base Contains So                               | ound and Prevents Leaks                            |   |                            | Solid Base Contains                           | s Sound and Prevents Leak                       | S                    |                  |  |
| Efficiency    | Saves 273 Gallons of W                               | Vater Each Year                                    |   |                            | Saves 484 Gallons of Water Each Year          |   |                      |                  |  |
|               | 306 kWh/yr-ENERGY S                                  |  | 234 kWh/yr-ENERO                                    | GY STAR® Qualified         |   |   |                      |                  |  |
|               | Exceeds ENERGY STAR                                  |  | Exceeds ENERGY STAR® Requirements for Water by 150% |                            |   |   |                      |                  |  |
|               | EcoSense® Reduces En                                 | nergy Usage up to 20%                              |   |                            | EcoSense® Reduces Energy Usage up to 20%      |   |                      |                  |  |
|               | Half-load Option for Sn                              | nall Loads   |   |                            | Half-load Option for                          | r Small Loads                                   |                      |                  |  |
| Safety        | AquaStop® Plus Four-p                                | art 24/7 Leak Protection                           |   |                            | AquaStop® Plus Four-part 24/7 Leak Protection |   |                      |                  |  |
|               |  |  |   |                            | Sanitize Option Ren                           | noves Bacteria and Enhanc                       | es Drying            |                  |  |
| Capacity      | Nine-place-setting Cap                               | acity  |   |                            | 14-place-setting Ca                           | pacity  |                      |                  |  |
|               | Premium Racks with Single-Flexible Silverware Basket |  |   |                            | Vario™ Racks with Flexible Silverware Basket  |   |                      |                  |  |
|               | RackMatic® Automatica                                | RackMatic® Automatically Adjustable Upper Rack     |   |                            |   | Manual Height Adjustment Upper Rack             |                      |                  |  |
|               | Extra-tall-item Sprinkle                             | Extra-tall-item Sprinkler Cleans Items 22" Tall    |   |                            |   | Extra-tall-item Sprinkler Cleans Items 22" Tall |                      |                  |  |
| Convenience   | Multi-function LED with                              | h Remaining Time                                   |   |                            | Multi-function LED with Remaining Time        |   |                      |                  |  |
|               | 19-hour Delay Start Tin                              | mer  |   |                            | 24-hour Delay Start Timer                     |   |                      |                  |  |
|               | Quick Wash-In 30 Min                                 | utes or Less                                       |   |                            | Quick Wash-In 30                              | Minutes or Less                                 |                      |                  |  |
|               | Delicate Wash for Fine                               | China  |   |                            | Delicate Wash for F                           | ine China                                       |                      |                  |  |
|               |  |  |   |                            | Glass Care Cycle fo                           | r Fine Glassware                                |                      |                  |  |
| Performance   |  |  |   |                            | Variable Spray Pres                           | sure  |                      |                  |  |
|               |  |  |   |                            | ActiveTab® Tray Opt                           | timizes Detergent Dissolvin                     | g                    |                  |  |
|               |  |  |   |                            | Water Softener Ens                            | ures Perfect Cleaning                           |                      |                  |  |
|               |  |  |   |                            |   |   |                      |                  |  |

## **Dishwasher Dimensions and Installation**


#### **Recessed Handle Dishwashers**






\*23%" without decor strips

SHE55M1\_UC SHE68R5\_UC SHE55R5 UC




\*23%" without decor strips

SGE63E06UC SGE63E15UC



\*23%" without decor strips

SHE3AR5\_UC SHE43R5\_UC SHE3AR7\_UC SHE43RL\_UC SHE43P2\_UC SHE45R55UC




SPE5ES55UC

**Note:** Dimensions are for planning only. For details, see installation manual, or visit www.bosch-home.com/us. Specifications subject to change without notice. For immediate installation dimensions by fax, call 1.925.284.3558. Use code #8317 for a directory of Bosch products. Also available online at dexpress.com.

## **Dishwasher Dimensions and Installation**


#### **Bar Handle Dishwashers**






\*23%" without decor strips


SHX55R5\_UC SHX68R5\_UC SHX55RL5UC SHX98M09UC





\*23%" without decor strips

SHX3AR5\_UC SHX33RL5UC SHX3AR7\_UC SHX43R5\_UC




**Note:** Dimensions are for planning only. For details, see installation manual, or visit www.bosch-home.com/us. Specifications subject to change without notice. For immediate installation dimensions by fax, call 1.925.284.3558. Use code #8317 for a directory of Bosch products. Also available online at dexpress.com.

## **Dishwasher Dimensions and Installation**


#### **Custom Panel Dishwashers**





- \* 23%" without decor strips
- \*\* Measured from the lower edge of the worktop. Recommended panel thickness 3/4". Panel weight 9–18 lbs.

SHV43R53UC SHV68R53UC SHV55R53UC



\* Measured from the bottom edge of the countertop. Recommended panel thickness ¾".

#### SPV5ES55UC

**Note:** Dimensions are for planning only. For details, see installation manual, or visit www.bosch-home. com/us. Specifications subject to change without notice. For immediate installation dimensions by fax, call 1.925.284.3558. Use code #8317 for a directory of Bosch products. Also available online at dexpress.com.