



*Best for Baby™*

**INSTRUCTIONS**

**OWNER'S MANUAL**

*Keep for future use.*

***Tribute™***  
***Child Restraint System***

***Child Requirements***

*Weight: 2.3 – 18 kg (5 – 40 lbs)*  
*Height: 48 – 102 cm (19 – 40 inches)*

**! WARNING**

To reduce the risk of **SERIOUS INJURY** or **DEATH**, read this owner's manual prior to installing and using this child restraint.

More children are killed every year as passengers in car crashes than by any other type of injury. To reduce the risk of SERIOUS INJURY or DEATH, read this owner’s manual and your vehicle owner’s manual before installing and using this child restraint. Using a child restraint makes a big difference. By properly using this child restraint and following these instructions (and the instructions that accompany your vehicle), you will greatly reduce the risk of serious injury or death to your child from a crash. Do not be misled by the commonly used term “safety seat;” no restraint system can prevent all injuries in all crashes. Many properly restrained adults and children are injured in motor vehicle crashes, including relatively minor crashes. A properly used child restraint is the best way to minimize injuries to your child and to increase the chances for your child’s survival in most crashes.

## ***Table of Contents***

Warnings .....	2
Safe Practices .....	6
Recall Information for U.S. Customers .....	7
Public Notice for Canadian Customers .....	7
Airplane Usage .....	7
Visual Glossary .....	8
Securing the Child in the Child Restraint .....	10
Removing the Child from the Child Restraint .....	12
Using the Tribute™ Rear-facing .....	14
Positioning the Recline Stand .....	16
Installing with LATCH .....	17
Installing with a Seat Belt .....	21
Using the Tribute™ Forward-facing .....	24
Positioning the Recline Stand .....	26
Installing with the LATCH System .....	27
Installing with a Seat Belt .....	31
Positioning the Harness Strap .....	34
Adjusting the Crotch Strap .....	36
Adjusting the Harness Strap .....	36
Using the Locking Clip .....	37
Removing the Tether Strap .....	39
Removing the LATCH System .....	40
Installing the Accessories .....	41
Storing Your Instructions .....	42
Care and Cleaning .....	42
Replacement Parts .....	43
Limited Warranty .....	44

### ***U.S. REGULATORY NOTICE***

*This child restraint meets all applicable requirements of Federal Motor Vehicle Safety Standard 213.*

### ***For Canadian Models CANADIAN REGULATORY NOTICE***

*This child restraint meets all applicable requirements of Canadian Motor Vehicle Safety Standards CMVSS 213 and 213.1.*

### ***Child Requirements***

- *No restraint can guarantee absolute protection from injury in every crash.*
- *This child restraint is designed for use by children in rear-facing and forward-facing. To use this child restraint properly, children **MUST** meet weight/size specifications as follows:*

#### ***For Rear-facing Use***

- The child weighs 2.3 – 18 kg (5 – 40 lbs)
- The child is 48 – 94 cm (19 – 37 inches) AND the top of child’s head is at least 25 mm (1 in.) below the top of the child restraint seat back.

**DO NOT** use this or any child restraint with a premature infant until after consulting your doctor. Premature infants may have difficulty breathing when in a sitting position.

*The American Academy of Pediatrics recommends that children ride in the **rear-facing** position to the highest weight or height allowed by the child restraint.*

#### ***For Forward-facing Use***

- The child weighs 10 – 18 kg (22 – 40 lbs)
- The child is less than 102 cm (40 in.)
- Child is one year old or older

**Note:** Once your child exceeds 18 kg (40 lbs) **OR** is taller than 102 cm (40 in.), they can no longer safely use this child restraint, and you should consider using a booster seat.

## **⚠ WARNING**

### **Air Bag Warnings**

- **DO NOT** use this restraint in the front seat of a vehicle equipped with an air bag. Air bags may cause serious injury or death to children 12 years of age and under. If your vehicle has an air bag, refer to your vehicle owner's manual for child restraint installation.
- If the rear seat of your vehicle is equipped with side air bags, refer to the following information for proper usage:  
Vehicles built prior to the 2002 model year  
**DO NOT** use this restraint in a vehicle seating position equipped with a side air bag unless authorized by the vehicle manufacturer.  
Model year 2002 and newer vehicles  
Refer to your vehicle owner's manual before placing this restraint in a seating position equipped with a side air bag.
- **DO NOT** place any objects between the restraint and the side air bag, as an expanding air bag may cause the items to strike your child.



## **⚠ WARNING**

### **Location Warnings**

- According to statistics, children are safer when properly restrained in a rear seating position than in the front seating position. Generally, the center rear position is safest and should be used if available. Children 12 and under should ride in the back seat of the vehicle.
- **ONLY** use this child restraint on forward facing vehicle seats. **DO NOT** use this restraint with vehicle seats that face the rear or side.
- **ONLY** use this child restraint on vehicle seats with backs that lock into place.
- Some child restraints do not fit all vehicles or all seating locations. There are many thousands of combinations of vehicle makes, models, child restraint configurations, seat belt designs and seat cushion shapes. The easiest way to determine whether your child restraint is suitable for a particular seating position is to check for a tight installation. If the child restraint can not be properly installed, **DO NOT** use the child restraint. Consult vehicle owner's manual, try a different seating location or call Evenflo.

### **Premature Infants**

- **DO NOT** use this or any child restraint with a premature infant until after consulting your doctor. Premature infants may have difficulty breathing when in a sitting position.

### **Rear-facing Warnings**

- **DO NOT** use this child restraint rear-facing in a vehicle equipped with lap belts that only lock during a sudden stop or crash (emergency locking retractors). You must use a seating location with a locking seat belt. Check your vehicle owner's manual to see if you have lap belts with emergency locking retractors.
- When using this restraint rear-facing, **DO NOT** loosen the vehicle seat belt to provide more leg room as this will prevent the child restraint from protecting your child.
- **DO NOT** use the highest set of harness slots rear-facing. The harness will not properly restrain the child during a crash.
- Fold-down armrests could pose a hazard to a rear-facing child in certain types of collisions. Consult your vehicle owner's manual before installing any rear-facing child restraint in front of a fold-down armrest.
- **NEVER** turn a child restraint forward facing with an infant weighing less than 10 kg (22 lbs) or less than one year of age, crash forces may cause serious injury or death.
- The headrest on the vehicle seat that the child faces when sitting in the rear facing mode should be placed in the lowest position. The vehicle seat back that the child faces must be fully padded and free of any hard objects.

## **WARNING**

### Forward-facing Warnings

- If your child weighs more than 18 kg (40 lbs) or their shoulders are above the highest harness level, you **MUST** discontinue using this child restraint as it may no longer adequately protect your child.
- **DO NOT** use the lowest set of harness slots forward-facing. The harness will not properly restrain the child during a crash.

### Seat Belt Warnings

- **DO NOT** use this child restraint in a vehicle with door-mounted seat belts.
- **DO NOT** use this child restraint in a vehicle with seat belts that automatically move along the vehicle frame when the door is opened. These seat belts will not hold a child restraint properly.
- Use only with vehicle seat belts that can be pulled tight and will stay locked.
- **DO NOT** use this child restraint if it moves more than 25 mm (1 in.) forward or side-to-side at the vehicle belt path. Serious injury or death may result from poor installation. If you can not tightly secure the child restraint, try again or move it to another location.
- Failure to adjust the harness or seat belts snugly around your child may result in your child striking the vehicle's interior during a sudden stop or crash. Serious injury or death may occur.
- If the vehicle seat belts are not routed and fastened correctly, the child restraint may not protect your child in a crash.
- **DO NOT** allow the seat belt release button to touch the child restraint. Accidental contact may cause the seat belt to release. If necessary, turn the seat belt release button away from the child restraint or move the child restraint to a different location.
- Remove locking clip from vehicle seat belt when not used with a child restraint, or the vehicle seat belt will not properly restrain an adult or child. Serious injury could occur.

### LATCH Warnings

- **ONLY** use for securing child restraint to lower LATCH or ISOFIX anchor points.
- **ALWAYS** read and follow exactly the instructions which accompany your vehicle and child restraint.
- **NEVER** attach two hooks to one vehicle lower anchor point.
- **DO NOT** use the vehicle seat belts to install a child restraint when using the LATCH system.
- This LATCH system is intended to be used **ONLY** as described in these instructions. Serious injury or death may result from misuse.

## **WARNING**

- To avoid strangulation, you must store the unused LATCH harness, with all slack removed, in the storage area on the back of the seat. Roll or fold the excess LATCH strap and secure with a rubber band to prevent serious injury to vehicle occupants.
- **ALWAYS** be sure that the LATCH hook is fully engaged onto the LATCH anchor point by pulling hard on the LATCH strap. If it is not totally engaged, the LATCH system will not secure your child restraint. Serious injury or death may result.
- In addition to these instructions, read and follow your vehicle owner's manual regarding installation of the child restraints and LATCH. If there is a discrepancy, follow your vehicle owner's manual.
- **DO NOT** use this child restraint if it moves more than 25 mm (1 inch) forward or side-to-side at the LATCH belt path. Serious injury or death may result from poor installation. If you can not tightly secure the child restraint, try again or move it to another location.



### Top Tether Warnings

- Top tether strap is for **forward-facing use ONLY**.
- Failure to secure the top tether strap (provided) as specified in these instructions could result in serious injury.
- When using the child restraint forward-facing, the top tether strap **MUST** be used if your vehicle has a lap belt that only locks during a sudden stop or crash (emergency locking retractors) AND/OR if your vehicle has seat belts whose buckles extend from a slot in the vehicle seat cushion in front of the crease where the seat and back cushions meet. Otherwise the child restraint cannot be installed tightly, increasing the risk of injury to your child. Check your vehicle owner's manual to see if your vehicle has emergency locking retractors.
- To avoid a strangulation hazard, you **MUST** tightly roll or fold excess tether strap and secure with the strap/rubber band. Attach the tether hook to the storage clip when not in use. This will keep an unused tether from hitting someone during a crash.

### Additional Warnings

- **DO NOT** use child restraint if it is damaged, broken, or missing parts.
- **DO NOT** use this restraint if it has been involved in a crash. It must be replaced.
- **NEVER** leave child unattended.
- This child restraint must be firmly secured to the vehicle at all times. An unsecured child restraint may injure someone if a crash occurs.

## **⚠️ WARNING**

- **DO NOT** attach any other item to this child restraint unless it has been certified for use with this specific child restraint.
- Failure to follow installation instructions could result in serious injury or death. These instructions and the instructions in your vehicle owner's manual must be followed carefully. If there is a conflict between the two, the vehicle owner's manual regarding child restraint installation must be followed.
- In hot or sunny weather, **ALWAYS** check the seat, the buckle and LATCH hooks, and adjuster for hot areas before placing a child into the child restraint. Your child could be burned. Cover the child restraint with a light colored blanket when you leave the vehicle.
- In cold weather, **DO NOT** dress the child in bulky clothing like snowsuits if the child is riding in a child restraint. Bulky coats/snowsuits make it difficult to properly tighten the harness to the child which may allow the child to be ejected from the restraint during a crash. If necessary, place a blanket over the harnessed child without interfering with the child restraint harness system.
- **DO NOT** use the cup holder to store bottles or hard containers. Only for use with soft cups (such as styrofoam or paper).
- **DO NOT** place any cups that contain hot liquids (such as coffee or tea) in the accessories.
- **DO NOT** attach any other items to this child restraint unless it has been certified for use with this specific child restraint.

## **Safe Practices**

- **Everyone rides buckled up or the vehicle does not go.** Make no exceptions for adults or children. If someone unbuckles, stop the vehicle. Being firm and consistent from the start will mean fewer discipline problems as children get older. An unrestrained person can be thrown into and injure other passengers.
- Many safety advocates and healthcare professionals recommend that children ride rear facing for as long as possible. See limitations recommended on page 1.
- **NEVER** try to tend to a crying baby's needs while driving. **NEVER** take a baby out of a child restraint for comforting while the vehicle is moving.
- **DO NOT** allow a child in a vehicle to have objects such as lollipops or ice cream on a stick. The object can injure the child if the vehicle swerves or hits a bump.

- **DO NOT** feed an infant who is riding in a child restraint.
- Put sharp or heavy items in the trunk. Anything loose can be deadly in a crash.
- **DO NOT** dress the child in blanket sleepers or other clothing that would prevent the crotch strap from fitting snugly up against the child.
- In hot, sunny weather cover the seat and buckle with a light colored blanket when you leave the vehicle.

## **Recall Information for U.S. Customers**

- Child restraints could be recalled for safety reasons. You must register this restraint to be reached in a recall. Send your name, address, the restraint's model number, and manufacturing date to:  
**Evenflo Company, Inc., 1801 Commerce Dr.,  
Piqua, OH 45356, or call 1-800-233-5921.**  
You may also register on-line at:  
**[www.evenflo.com/registercarseat](http://www.evenflo.com/registercarseat)**
- For recall information call the U.S. Government's Vehicle Safety Hotline at 1-888-327-4236 (TTY:1-800-424-9153), or go to **<http://www.NHTSA.gov>**.

## **Public Notice for Canadian Customers**

- To register your child restraint, return your registration card, call 1-937-773-3971, or register on line at **[www.evenflo.com/registercarseatcanada](http://www.evenflo.com/registercarseatcanada)**.
- For recall information, call Transport Canada at 1-800-333-0510 (1-613-993-9851 in Ottawa region) or Evenflo at 1-937-773-3971.

## **Airplane Usage**



This child restraint meets Inversion requirements for airplane use. Airplane installation is the same as vehicle installation. Turn the top of the airplane seat belt buckle away from the restraint for easy release and removal.


For future reference, record the **model number** of your child restraint **AND** the **date of manufacture** below.

**Model Number:** \_\_\_\_\_

**Date of Manufacture:** \_\_\_\_\_


# Visual Glossary

Your vehicle components may be significantly different than pictured. Consult your owner's manual to help you identify your vehicle components.

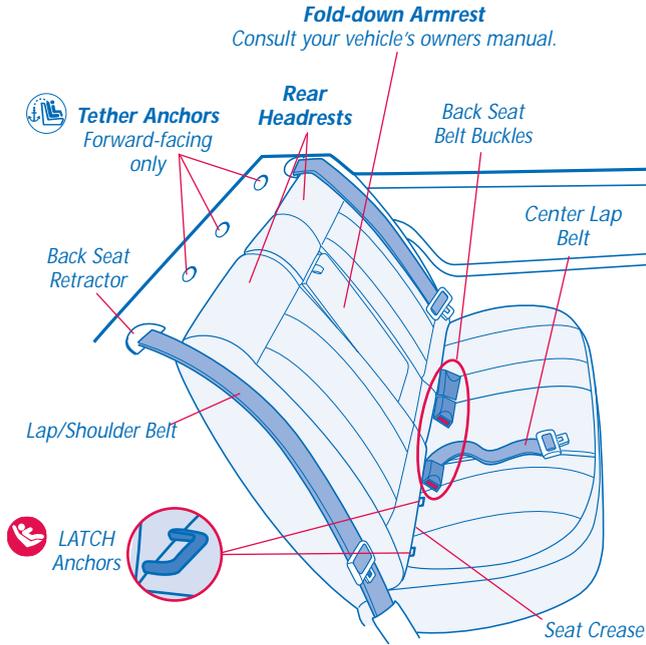


**IMPORTANT:** If your vehicle has **side air bags**, please refer to the warnings on page 2.

## Front View

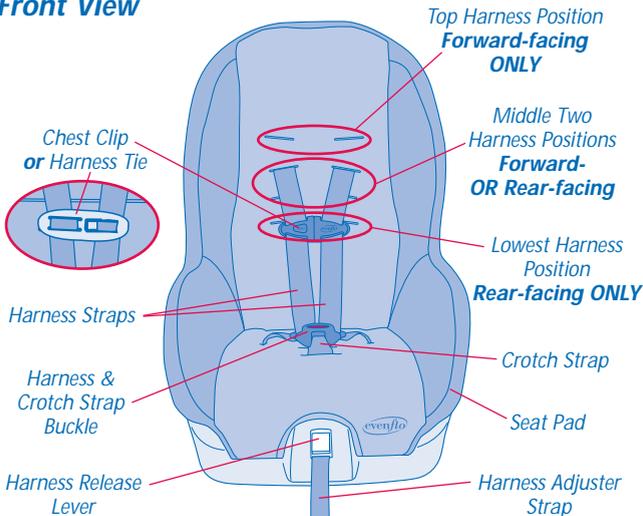


# Visual Glossary

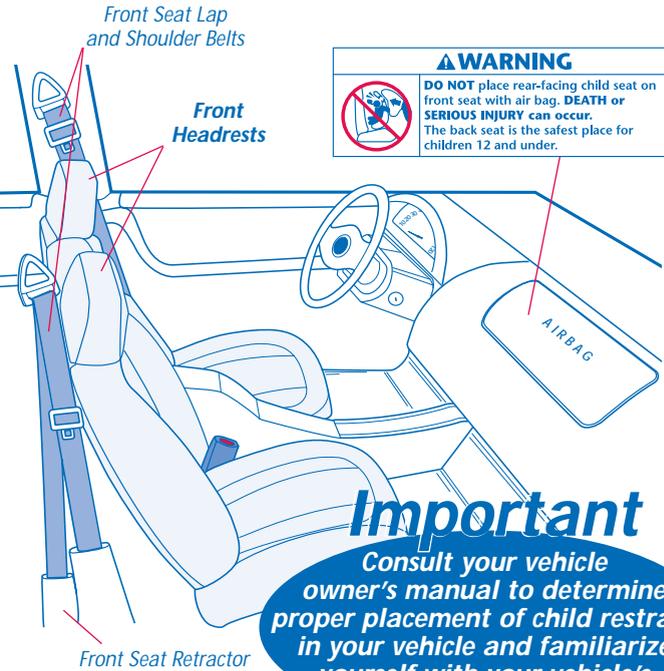

<b>⚠ WARNING</b>	
	<b>DO NOT</b> place rear-facing child seat on front seat with air bag. <b>DEATH</b> or <b>SERIOUS INJURY</b> can occur. The back seat is the safest place for children 12 and under.


**Important**  
Consult your vehicle owner's manual to determine proper placement of child restraint in your vehicle and familiarize yourself with your vehicle's components.

## Back View

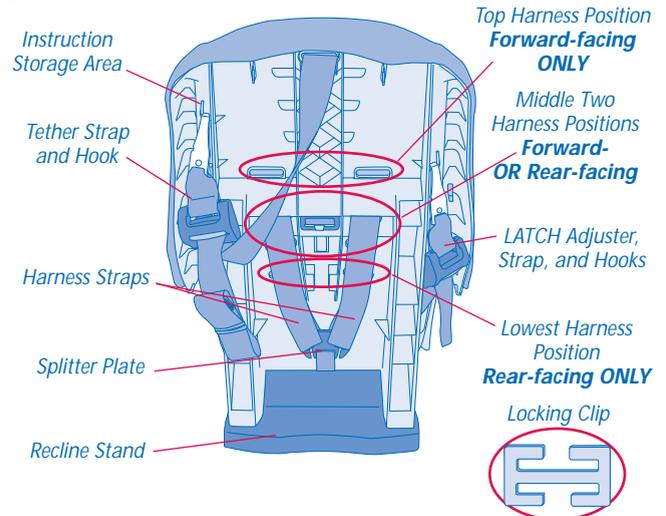

## Securing the Child


1

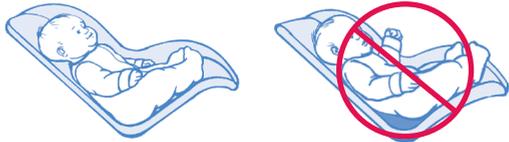

Place baby in the child restraint. The baby's back and bottom should be flat against the restraint. If there is a gap, the baby will not be comfortable.

### Using the Harness Tie


2

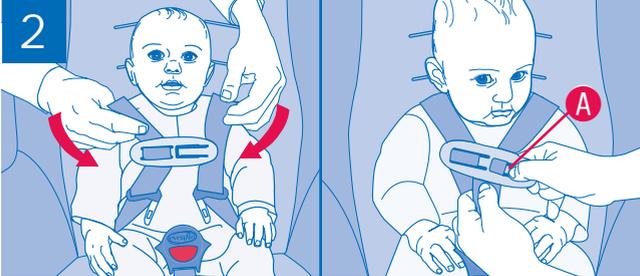

Slide each harness strap over the child's shoulders.

Press in on the tab of the harness tie **A**, and slide the harness strap over the tab. The harness tie must be positioned at armpit level.

3

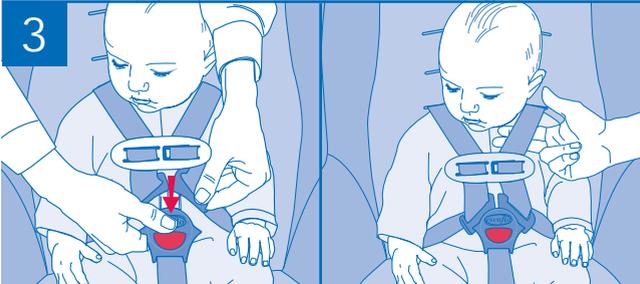


Insert the buckle tongues into the buckle. Pull up on the harness strap to ensure that the buckle tongues are engaged.

The harness straps must be snug against the child. A snug strap should not allow any slack. It lies in a relatively straight line without sagging. It does not press on the child's flesh or push the child's body into an unnatural position. Check the harness straps near the shoulders for slack and adjust as needed.

## Using the 2-piece Chest Clip


2

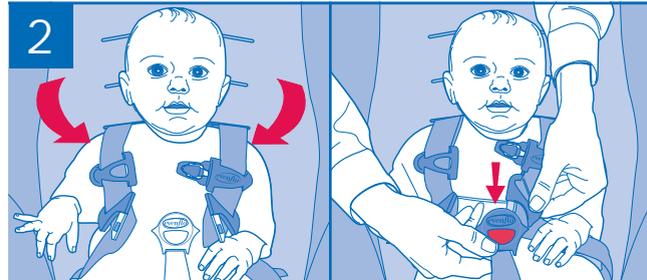

Slide each harness strap over the child's shoulders.

Insert the buckle tongues into the buckle. Pull up on the harness strap to ensure the buckle tongues are engaged.

3

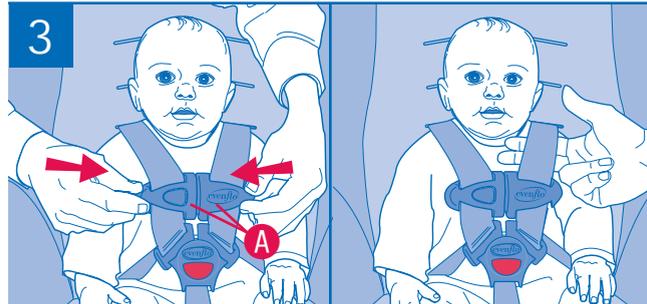


Align the two sides of the chest clip **A** and snap them together. The chest clip must be positioned at armpit level.

The harness straps must be snug against the child. A snug strap should not allow any slack. It lies in a relatively straight line without sagging. It does not press on the child's flesh or push the child's body into an unnatural position. Check the harness straps near the shoulders for slack and adjust as needed.

## Removing the Child from the Child Restraint


### Using the Harness Tie

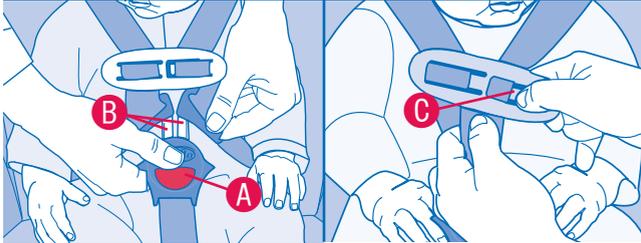

Press the red buckle release **A**, and remove the buckle tongues **B**.

To unfasten the harness tie, press the tab **C** and slide the harness off.

### Using the 2-piece Chest Clip

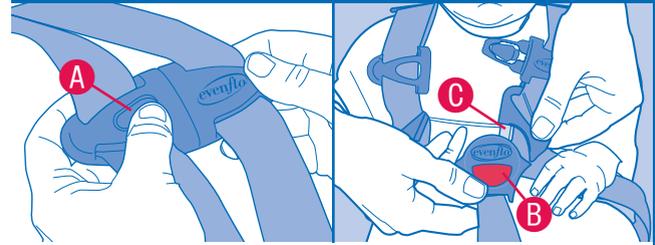

Push the release button **A** and pull the chest clip apart.

Press the red buckle release **B**, and remove both buckle tongues **C**.

# Using the Tribute™ Rear-facing

## Child Requirements for Rear-facing:

- **Weight:** 2.3 to 18 kg (5 to 40 lbs)
- **Height:** 48 to 94 cm (19 to 37 in.). AND the top of the child's head is least 25 mm (1 in.) below the top of the child restraint seat back.



## Rear-facing Installation Checklist

### **⚠ WARNING**

When using this restraint rear-facing, **DO NOT** loosen the vehicle seat belt to provide more leg room as this will prevent the child restraint from protecting your child.

#### 1. **Secure child restraint to the vehicle seat.**

- Recline Stand is flipped to the *Recline* position (page 16).
- Install with LATCH system (page 17) or the vehicle seat belt (page 21).
- Towel rolled up and placed beneath the base, if necessary (page 16).
- Install locking clip, if necessary (page 37).

#### 2. **Set the child in the child restraint.**

Top of head is at least 25 mm (1 inch) below the top of the child restraint seat back.

#### 3. **Make necessary adjustments.**

- Harness straps **MUST** be on the child's shoulders and snug with no more than two-fingers width of space between the child and the harness strap (page 11).
- Crotch strap is snug against the child (page 36).

#### 4. **Fasten the buckle.** Refer to pages 10/11.

#### 5. **Position and connect chest clip.**

Chest clip/harness tie **MUST** be at armpit level (pages 10/11).

#### 6. **Check your work.**


- Recline Stand is flipped to the *Recline* position (page 16).
- The child restraint **DOES NOT** move more than 25 mm (1 in.) forward or side-to-side (pages 20 and 23).
- The child's back and bottom are flat against the back and bottom surfaces of the child restraint.
- Shoulder harness straps **MUST** start at or below shoulder height, using the strap slots closest to your child's shoulders (page 34).
- Buckle tongues are fully engaged.
- The level arrow is level with ground (page 16).

## Positioning the Recline Stand for Rear-facing Use



Lift the child restraint and flip the recline stand **A** toward the front, as shown, to the *Recline* position.

### Rear-facing Recline

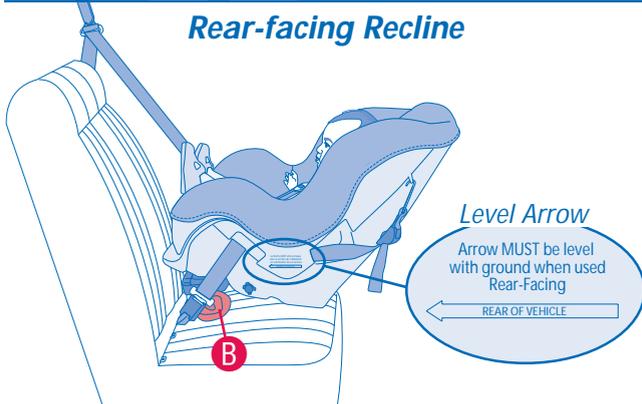

The child restraint **MUST** be in the *Recline* position for *rear-facing infant use*. Child **MUST** weigh 2.3 – 18 kg (5 – 40 lbs).

If the level arrow is not parallel to the vehicle floor, use a tightly rolled towel or small blanket **B** beneath the front edge of the child restraint. You need to provide enough recline for an infant's head to lie back comfortably.

**IMPORTANT:** *Infants may have difficulty breathing when in a sitting position. Make sure they recline enough for their head to lie back comfortably and safely. Failure to properly recline the child restraint could increase the child's risk of serious injury or death.*

## Installing the Child Restraint Rear-facing with LATCH

*LATCH* is a system for attaching the child restraint to your vehicle seat. It is to be used in place of your vehicle's seat belts, and can be used in vehicles with *LATCH* anchors. Your vehicle owner's manual may refer to this system as *ISOFIX* or *Universal Anchorage System (UAS)*.


### **⚠ WARNING**

- **ONLY** use for securing child restraint to lower *LATCH* anchor points.
- **ALWAYS** read and follow exactly the instructions which accompany your vehicle and child restraint.
- **NEVER** attach two hooks to one vehicle lower anchor point.
- **DO NOT** use the vehicle seat belts to install a child restraint when using the *LATCH* system.
- This *LATCH* system is intended to be used **ONLY** as described in these instructions. Serious injury or death may result from misuse.
- To avoid strangulation, you must store the unused *LATCH* harness, with all slack removed, in the storage area on the back of the seat. Roll or fold the excess *LATCH* strap and secure with a rubber band to prevent serious injury to vehicle occupants.
- **ALWAYS** be sure that the *LATCH* hook is fully engaged onto the *LATCH* anchor point by pulling hard on the *LATCH* strap. If it is not totally engaged, the *LATCH* system will not secure your child restraint. Serious injury or death may result.
- In addition to these instructions, read and follow your vehicle owner's manual regarding installation of child restraints and *LATCH*. If there is a discrepancy, follow your vehicle owner's manual.



## **⚠ WARNING**

**NEVER** turn a child restraint forward-facing with an infant weighing less than 10 kg (22 lbs) or less than one year of age. Crash forces may cause serious injury or death.

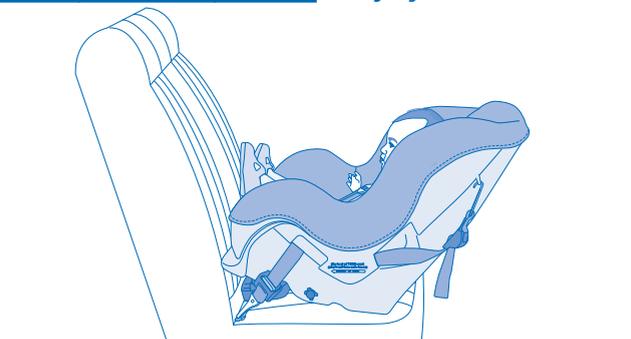


Infants **MUST** always ride facing the rear of the vehicle. The back of the child restraint supports and protects the baby and absorbs crash forces. Adjust the child restraint to the *Recline* position (p. 16). Place the child restraint in your vehicle rear-facing.


1

## **⚠ WARNING**

**DO NOT** use the upper harness slots rear-facing. The harness may not properly restrain the child during a crash.

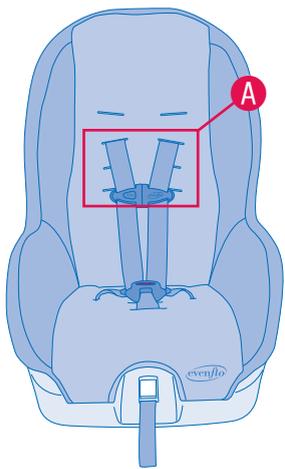


Make sure that the harness straps are in one of the three lower harness positions **A**. The harness straps must start at or below shoulder height, using the strap slots closest to your child's shoulders **B**, as shown.




2

Pull the seat pad off of the front of the child restraint. Route the LATCH strap **C** and hook through the rear-facing belt paths **D**.




3

When the crotch strap **E** is in the front slot, route LATCH strap **C** behind the crotch strap, as shown.




When the crotch strap **E** is in the rear slot, route LATCH strap **C** in front of the crotch strap, as shown.

Rear-facing Use



4



Refer to your vehicle owner's manual to locate the lower anchors on your vehicle seat. Attach the right hook **F** to the right anchor **G**, and the left hook to the left anchor. **DOUBLE CHECK** that the LATCH hook is fully engaged by pulling hard on the LATCH harness.



## **⚠ WARNING**

**DO NOT** use this child restraint if it moves more than 25 mm (1 in.) forward or side-to-side at the vehicle belt path. Serious injury or death may result from poor installation. If you can not tightly secure the child restraint, try again or move it to another location.

Using your full weight push the child restraint firmly into the vehicle seat, while pulling up on the LATCH harness to tighten.

**The LATCH harness must be as tight as possible.** If you can move the child restraint more than 25 mm (1 in.) forward or side-to-side at the LATCH harness path **D**, the belts are not tight enough. You **MUST** try again, or find another location for your child restraint.

## Installing the Child Restraint Rear-facing with a Seat Belt

### **⚠ WARNING**

**NEVER** turn a child restraint forward-facing with an infant weighing less than 10 kg (22 lbs) or less than one year of age. Crash forces may cause serious injury or death.




Infants **MUST** always ride facing the rear of the vehicle. The back of the child restraint supports and protects the baby and absorbs crash forces.

Adjust the child restraint to the *Recline* position (p. 16). Place the child restraint in your vehicle rear-facing.

1

### **⚠ WARNING**

**DO NOT** use the upper harness slots rear-facing. The harness may not properly restrain the child during a crash.

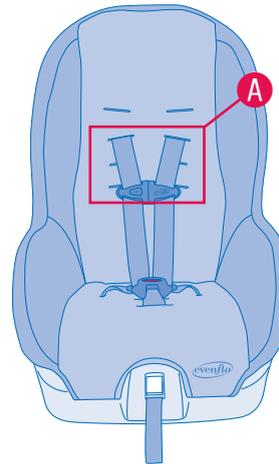


Make sure that the harness straps are in one of the three lower harness positions **A**. The harness straps must start at or below shoulder height, using the strap slots closest to your child's shoulders **B**, as shown.



2


## Lap Belt Only




Pull the seat pad off of the front of the child restraint. Route the vehicle seat belt **C** through the rear-facing belt path **D**, continue through the opposite opening of the child restraint. Fasten the vehicle seat belt, as shown, depending on your type of seat belt.

**Note:** You **MUST** use a locking clip with lap/shoulder seat belt combinations that have a buckle tongue that slides freely along the belt without locking into place. (To install a locking clip, refer to page 37).


## Lap &amp; Shoulder Belt Combination



3



When the crotch strap **E** is in the front slot, route seat belt **C** behind the crotch strap, as shown.



When the crotch strap **E** is in the rear slot, route seat belt **C** in front of the crotch strap, as shown.

4



## **⚠ WARNING**

If vehicle seat belts are not routed and fastened correctly, the child restraint may not protect your child in a crash. **DO NOT** use this child restraint if it moves more than 25 mm (1 in.) forward or side-to-side at the vehicle belt path. Serious injury or death may result from poor installation. If you can not tightly secure the child restraint, try again or move it to another location.

**The seat belt must be as tight as possible.**

Put your full weight into the child restraint as you tighten the seat belt **D**.

**Check your work.** If you can move the child restraint more than 25 mm (1 in.) forward or side-to-side at the belt path **C**, the seat belt is not tight enough, and you **MUST** try again.

# Using the Tribute™ Forward-facing

## Child Requirements for Forward-facing:

- **Weight:** 10 to 18 kg (22 to 40 lbs)
- **Height:** 71 to 102 cm (28 to 40 in.) AND the tops of the child's ears are below the top of the child restraint seat back.
- **Age:** At least one year of age.



**IMPORTANT:** Once your child exceeds 18 kg (40 lbs) **OR** is taller than 102 cm (40 in.) they can no longer safely use this child restraint and you should consider using a booster seat.

## Forward-facing Installation Checklist

### **⚠ WARNING**

If your child weighs more than 18 kg (40 lbs) or their shoulders are above the highest harness level, you **MUST** discontinue use or the child restraint will not protect your child.

#### 1. Secure child restraint to the vehicle seat.

- Recline Stand is flipped to the *Upright* position (page 26).
- Install with the LATCH system (page 27) or the vehicle seat belt (page 31) and tether strap (page 30/32).
- Install locking clip, if necessary (page 37).

#### 2. Set the child in the child restraint.

Top of the child's ears are at or below the child restraint seat back.

#### 3. Make necessary adjustments.

- Harness straps **MUST** be on the child's shoulders and snug with no more than two-fingers width of space between the child and the harness strap (page 11).
- Crotch strap is snug against the child (page 36).

#### 4. Fasten the buckle. Refer to pages 10/11.


#### 5. Position and connect chest clip.

Chest clip/harness tie **MUST** be at armpit level (pages 10/11).

#### 6. Check your work.


- Recline Stand is flipped to the *Upright* position (page 26).
- The child restraint **DOES NOT** move more than 25 mm (1 in.) forward or side-to-side (pages 29 and 32).
- The child's back and bottom are flat against the back and bottom surfaces of the child restraint.
- Shoulder harness straps **MUST** start at or above shoulder height, using the strap slots closest to your child's shoulders (page 34).
- Buckle tongues are fully engaged.

## Positioning the Recline Stand for Forward-facing Use

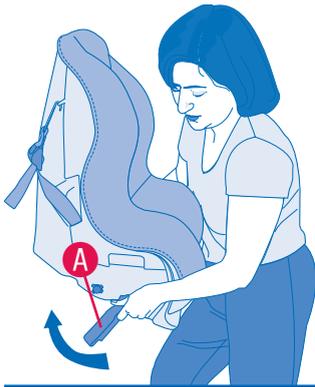

Lift the child restraint and flip the recline stand **A** toward the rear, as shown, to the *Upright* position.

### Forward-facing Upright

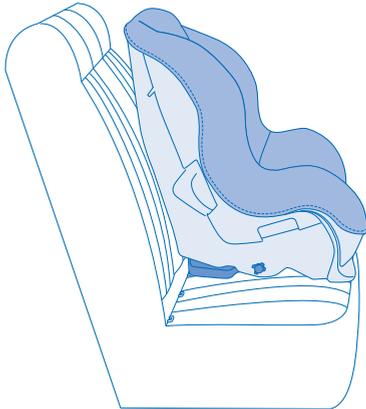

The child restraint **MUST** be in the *Upright* position for *forward-facing* use. Child **MUST** weigh 10 – 18 kg (22 – 40 lbs) and be at least one year of age.

## Installing the Child Restraint Forward-facing with LATCH



*LATCH* is a system for attaching the child restraint to your vehicle seat. It is to be used in place of your vehicle's seat belts, and can be used in vehicles with *LATCH* anchors. Your vehicle owner's manual may refer to this system as *ISOFIX* or *Universal Anchorage System (UAS)*.

### **⚠ WARNING**


- **ONLY** use for securing child restraint to lower *LATCH* anchor points.
- **ALWAYS** read and follow exactly the instructions which accompany your vehicle and child restraint.
- **NEVER** attach two hooks to one vehicle lower anchor point.
- **DO NOT** use the vehicle seat belts to install a child restraint when using the *LATCH* system.
- This *LATCH* system is intended to be used **ONLY** as described in these instructions. Serious injury or death may result from misuse.
- To avoid strangulation, you must store the unused *LATCH* strap, with all slack removed, in the storage area on the back of the seat. Roll or fold the excess *LATCH* strap and secure with a rubber band to prevent serious injury to vehicle occupants.
- **ALWAYS** be sure that the *LATCH* hook is fully engaged onto the *LATCH* anchor point by pulling hard on the *LATCH* strap. If it is not totally engaged, the *LATCH* system will not secure your child restraint. Serious injury or death may result.
- In addition to these instructions, read and follow your vehicle owner's manual regarding installation of child restraints and *LATCH*. If there is a discrepancy, follow your vehicle owner's manual.



1

## **⚠ WARNING**


**DO NOT** use the lowest set of harness slots for forward-facing. The harness may not properly restrain the child in the event of a crash.

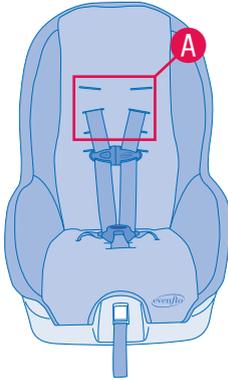

Make sure that the harness straps are in one of the top three strap slots **A**. The harness straps **MUST** be at or above shoulder height **B**, using the strap slots closest to your child's shoulders. This will provide more room for your toddler to fit comfortably.




2

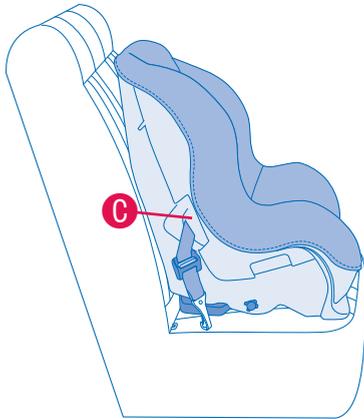

Place the child restraint in your vehicle forward-facing. Route the LATCH strap and hook through the forward-facing belt path **C**.




3

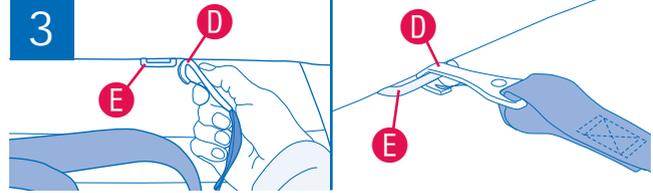

Refer to your vehicle owner's manual to locate the lower anchors on your vehicle seat. Attach the right hook **D** to the right anchor **E**, and the left hook to the left anchor.

**DOUBLE CHECK** that the LATCH hook is fully engaged by pulling hard on the LATCH harness.

4

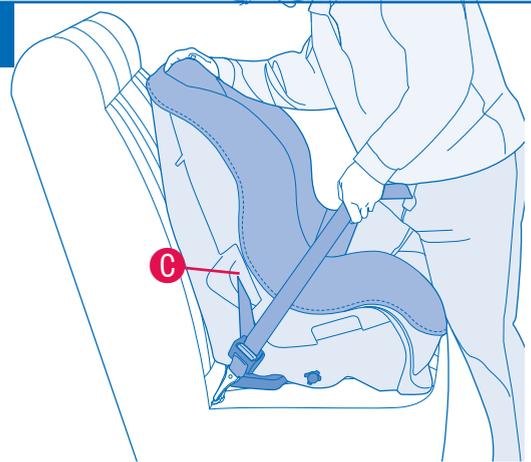

## **⚠ WARNING**

**DO NOT** use this child restraint if it moves more than 25 mm (1 in.) forward or side-to-side at the LATCH path. Serious injury or death may result from poor installation.

*If you can not tightly secure the child restraint, try again, move it to another location, or install with the vehicle seat belt.*

**The LATCH strap must be as tight as possible.** Using your full weight, push the child restraint firmly into the vehicle seat, while pulling up on the LATCH strap to tighten.


**Check your work.** If you can move the child restraint more than 25 mm (1 inch) forward or side-to-side at the LATCH path **C**, the LATCH strap is not tight enough and you **MUST** try again, or install with the vehicle seat belt.



5

## **! WARNING**

- Failure to follow these instructions could result in serious injury to your child or other vehicle occupants.
- The tether strap is for forward-facing use **ONLY**.

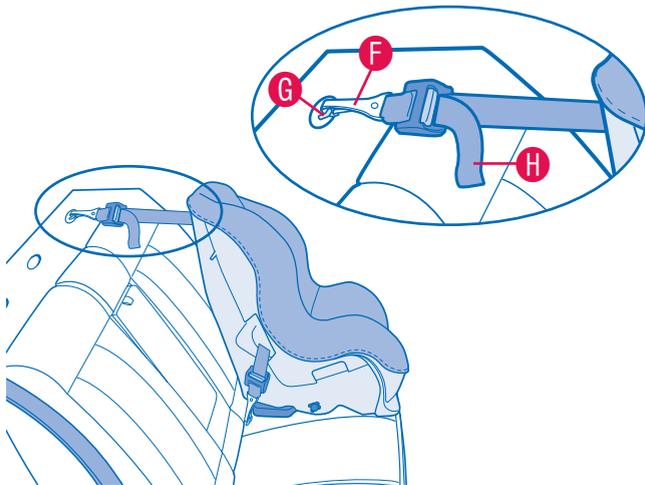

Attach tether hook **F** to tether anchor bracket **G**. Pull the end of the strap **H** to tighten. Remove all slack in the strap.

## **! WARNING**

- To avoid a strangulation hazard, you **MUST** tightly roll or fold excess tether strap and secure with the strap/rubber band.
- Attach the tether hook to the storage clip when not in use. This will keep an unused tether from hitting someone during a crash.

After adjusting the top tether strap, you may have excess strap; **DO NOT** cut it off. If you do, it may not be long enough to use in another vehicle. Instead, **tightly roll up the excess tether strap and place the rubber band around the bundle**.


**Note:** Refer to your vehicle owner's manual for the location of the tether anchor brackets in your vehicle. Older vehicles may not come equipped with anchor bracket hardware. Check with your vehicle dealer. If you have questions regarding tether anchors which are not addressed by the vehicle owner's manual, or answered by an authorized dealer/vehicle manufacturer call Evenflo's ParentLink.

## **Installing the Child Restraint Forward-facing with a Seat Belt**

1


## **! WARNING**

**DO NOT** use the lowest set of harness slots for forward-facing. The harness may not properly restrain the child in the event of a crash.

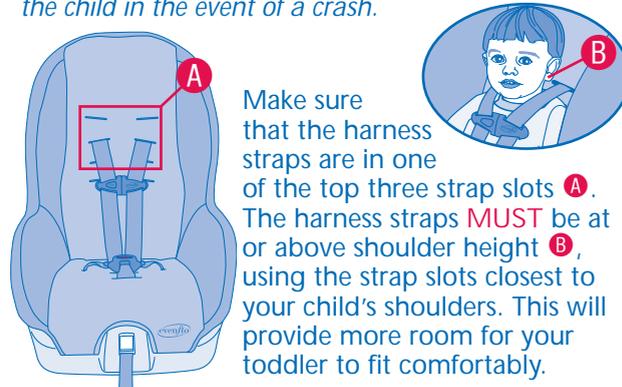

Make sure that the harness straps are in one of the top three strap slots **A**. The harness straps **MUST** be at or above shoulder height **B**, using the strap slots closest to your child's shoulders. This will provide more room for your toddler to fit comfortably.

2




Place the child restraint in your vehicle forward-facing.

3

## **! WARNING**



If the vehicle belts are not routed and fastened correctly, the child restraint may not protect your child in a crash.

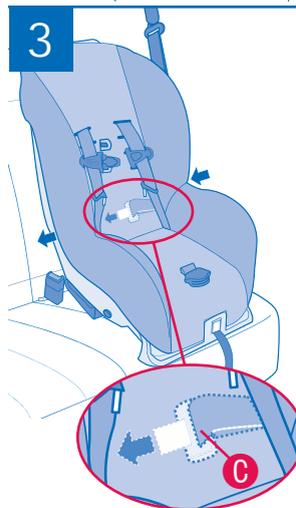

Thread the vehicle seat belt **C** through the forward-facing belt path behind the seat pad.

**Note:** Lift seat pad away from seat for easier access.


4

**Lap Belt Only****Lap & Shoulder Belt**

Fasten the vehicle seat belt as shown depending on your type of seat belt.

**Note:** You **MUST** use a locking clip with lap/shoulder seat belt combinations that have a buckle tongue that slides freely along the belt without locking into place. To install a locking clip, refer to page 37.

5

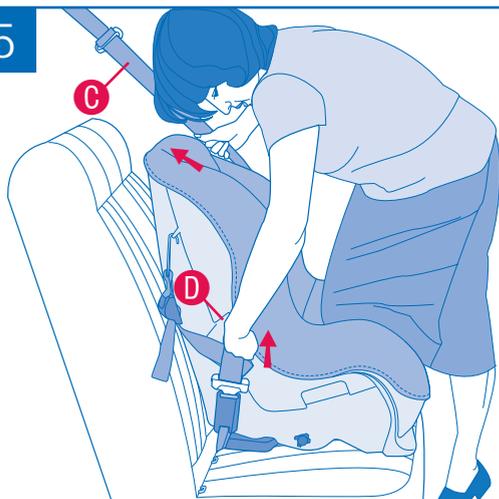
**⚠ WARNING**

**DO NOT** use this child restraint if it moves more than 25 mm (1 in.) forward or side-to-side at the vehicle belt path. Serious injury or death may result from poor installation. If you can not tightly secure the child restraint, try again or move it to another location.

**The seat belt must be as tight as possible.** Using your knee, put your full weight into the child restraint as you tighten the seat belt **C**.

**Check your work.** If you can move the child restraint more than 25 mm (1 inch) forward or side-to-side at the vehicle seat belt path **D**, the seat belt is not tight enough and you **MUST** try again.

6

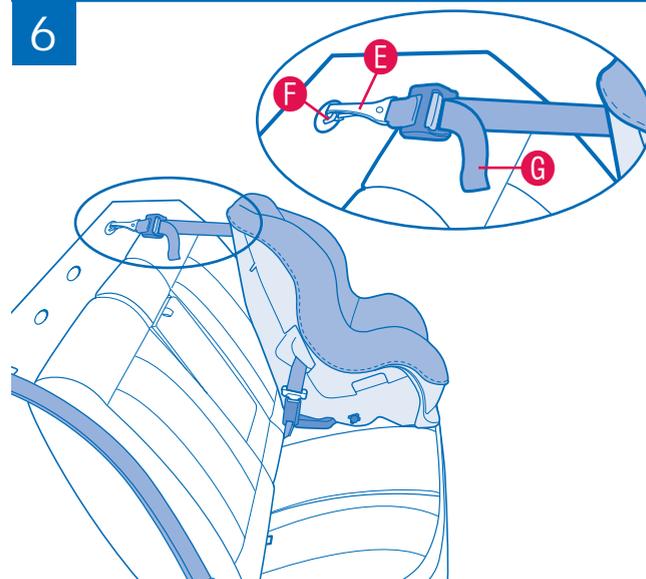

Attach tether hook **E** to tether anchor bracket **F**. Pull the end of the strap **G** to tighten. Remove all slack in the strap.

**⚠ WARNING**

- To avoid a strangulation hazard, you **MUST** tightly roll or fold excess tether strap and secure with the strap/rubber band.
- Attach the tether hook to the storage clip when not in use. This will keep an unused tether from hitting someone during a crash.


After adjusting the top tether strap, you may have excess strap; **DO NOT** cut it off. If you do, it may not be long enough to use in another vehicle. Instead, **tightly roll up the excess tether strap and place the rubber band around the bundle.**

**Note:** Refer to your vehicle owner's manual for the location of the tether anchor brackets in your vehicle. Older vehicles may not come equipped with anchor bracket hardware. Check with your vehicle dealer.

If you have questions regarding tether anchors which are not addressed by the vehicle owner's manual, or answered by an authorized dealer/vehicle manufacturer call Evenflo's ParentLink.

## Positioning the Harness Strap

Shoulder harness straps on this child restraint are adjustable to four positions.

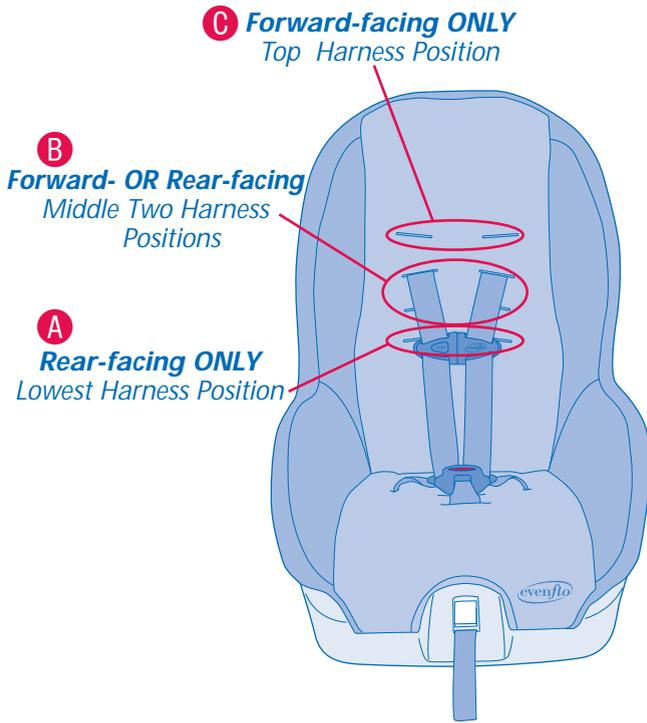


### When Using in Rear-facing Position


The shoulder harness straps **MUST ALWAYS** be at or below the child's shoulders in one of the three lower harness positions **A** or **B** and the child's head **MUST** be at least 25 mm (1 inch) below the top of the seat back.

### When Using in Forward-facing Position

The shoulder harness straps **MUST ALWAYS** be at or above the child's shoulders in one of the three top harness position **B** or **C**. If the top of the child's ears are above the top of the seat back, the child's shoulders fall above the highest set of harness slots, or the child weighs more than 18 kg (40 lbs) you **MUST** discontinue use of this child restraint. We recommend that you move your child to a larger child restraint or booster cushion.

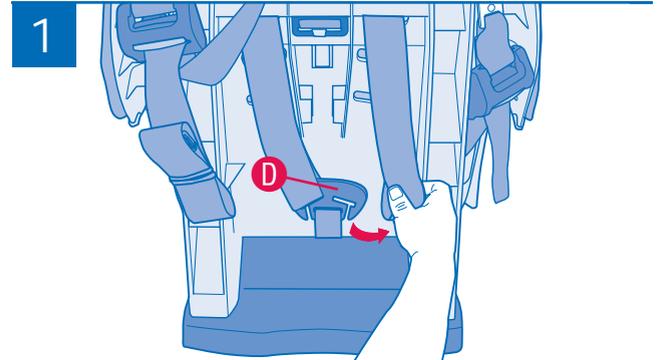


To change the harness strap position, loosen the shoulder harness, as shown on page 36, step 2. Slide the harness strap off of the splitter plate **D**. We suggest you do this one side at a time.

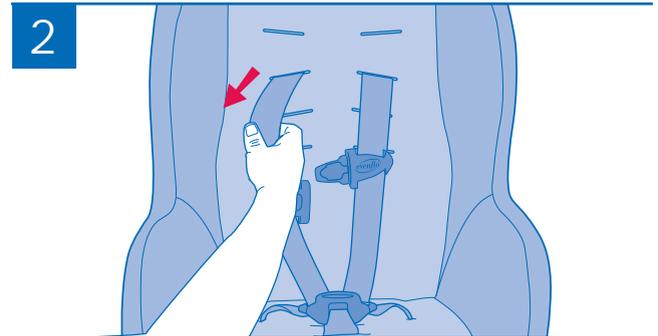

Pull harness strap through to the front of the child restraint.


Thread each harness strap through the appropriate slot in the seat shell and the pad. Pull the harness strap to the back of the child restraint.

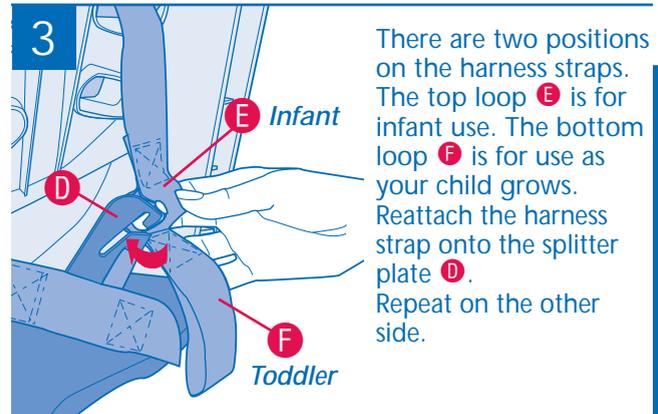

There are two positions on the harness straps. The top loop **E** is for infant use. The bottom loop **F** is for use as your child grows. Reattach the harness strap onto the splitter plate **D**. Repeat on the other side.

## Adjusting the Crotch Strap

This Child Restraint Has Two Buckle Harness Positions

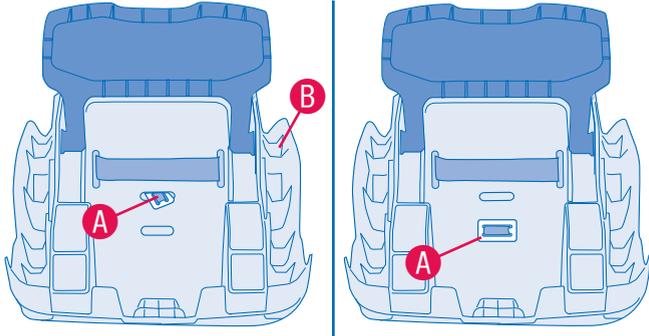


To reposition the crotch strap, first turn the child restraint upside down. Turn the crotch strap harness anchor **A** sideways and push it through the slot in the bottom of the seat shell **B**.

Reposition the harness anchor into the other slot. Make certain the harness anchor is properly seated against the seat shell **B**.

**Note:** The crotch strap should be snug against the child; choose the slot that is closest to the child AND the most comfortable for the child.

## Adjusting the Harness Strap

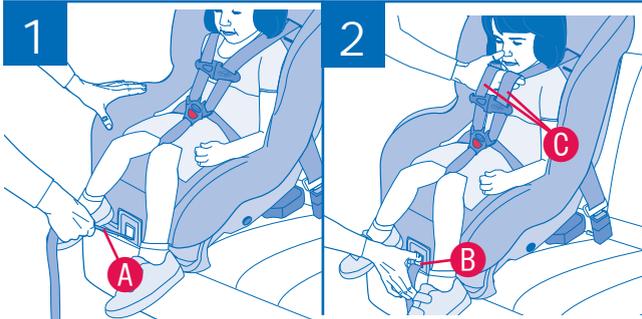


To tighten the harness straps, pull on the long harness adjuster strap **A** on the front of the seat.

To loosen the harness straps, push the harness release lever **B** on the front of the seat. At the same time, pull up on the harness strap **C** near the child's shoulders.

## Using the Locking Clip

To view a video about installing a locking clip, go to [www.evenflo.com](http://www.evenflo.com).




Use the locking clip with:

- Lap/shoulder seat belt combinations that have a buckle tongue that slides freely along the belt without locking into place; **OR**

- Seat belts equipped with an emergency locking retractor (ELR). Some ELR vehicle belts can be switched so that they lock when tightened. **It may not be necessary to use a locking clip in these situations.**

Locking Clip



**Consult your vehicle owner's manual before installing the locking clip.**

### 1 Rear-facing Installation




### Forward-facing Installation



Using your full weight, press down on the child restraint as you tighten the seat belt. While holding the lap and shoulder belts together just behind the free sliding buckle tongue **A**, unfasten the seat belt.

2

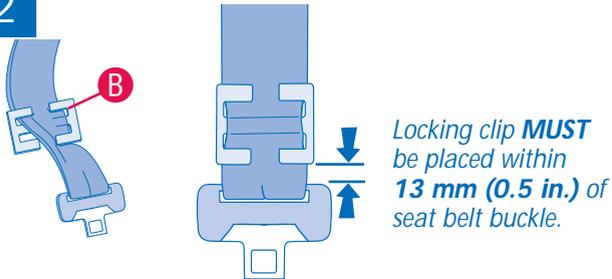

Thread the locking clip **B** onto the seat belt, and slide it into place.

Re-buckle the seat belt. Locking clip must be placed within 13 mm (0.5 in.) of buckle tongue.

## **⚠ WARNING**


Remove locking clip from vehicle seat belt when not used with a child restraint, or the vehicle seat belt will not properly restrain an adult or child. Serious injury could occur.

## Removing the Tether Strap



1


The tether strap that comes with your child restraint will be one of the two types below.

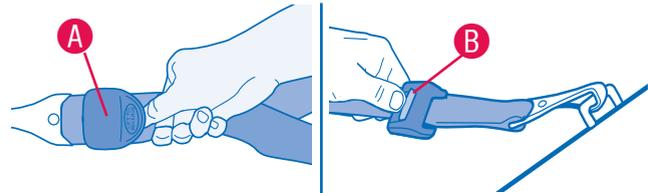

Tilt and slide the adjuster **A** to loosen.

Press the adjuster release button **B** to loosen tether strap.

2

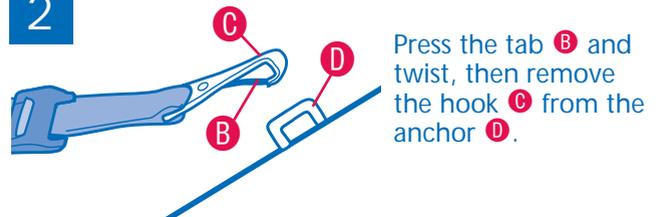


Press the tab **B** and twist, then remove the hook **C** from the anchor **D**.

3

## **⚠ WARNING**

- To avoid a strangulation hazard, you **MUST** tightly roll or fold excess tether strap and secure with the strap/rubber band.
- Attach the tether hook to the storage clip when not in use. This will keep an unused tether from hitting someone during a crash.

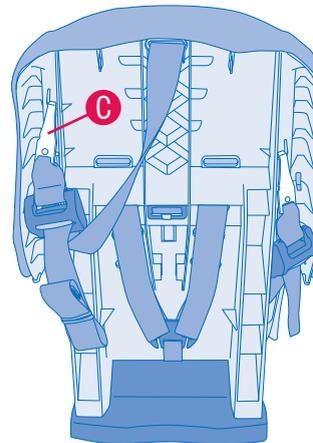


When the tether strap is not in use you **MUST** attach the hook **C** to the back of the child restraint, and tightly roll and secure the strap with the strap/rubber band. A loose tether strap and hook may injure your child.




## Removing the LATCH System

1

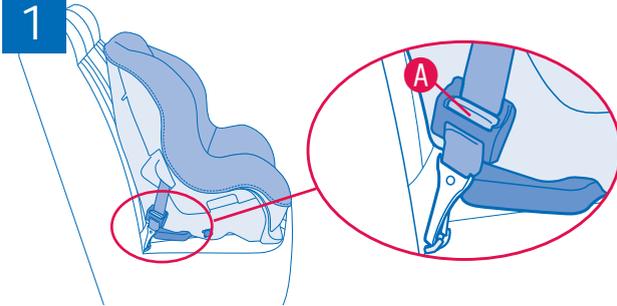


Press the adjuster release button **A** to loosen harness strap.

2

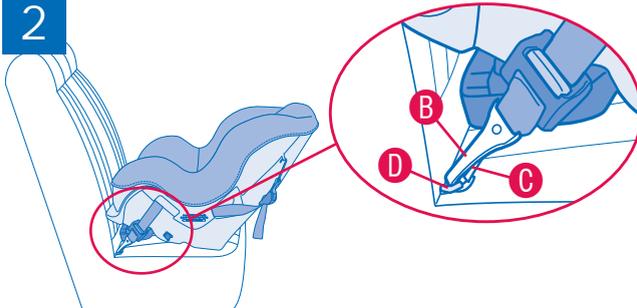

To remove the hook **B**, press the tab **C** and twist, then remove from anchor **D**.


3

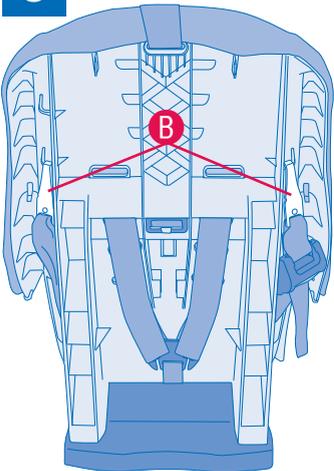

When the LATCH system is not in use you **MUST** attach the hooks **B** to the back of the child restraint. A loose LATCH strap and hook may injure your child.

## Installing the Accessories

*Not available on all models.*

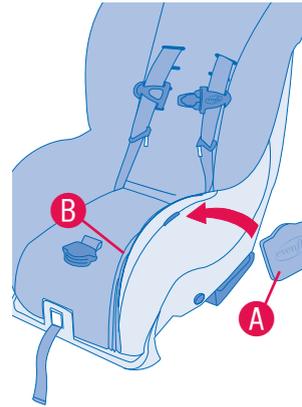


To install the cup holder **A**, peel back the seat pad **B** and insert the hook on the cup holder into the slot in seat, as shown. Replace pad over the seat.



To use the cup holder **A** fold down the lid and swing the holding arms up.

## **⚠ WARNING**

- **DO NOT** use the cup holder to store bottles or hard containers. Only for use with soft cups (such as styro-foam or paper).
- **DO NOT** place any cups that contain hot liquids (such as coffee or tea) in the accessories.
- **DO NOT** attach any other items to this child restraint unless it has been certified for use with this specific child restraint.

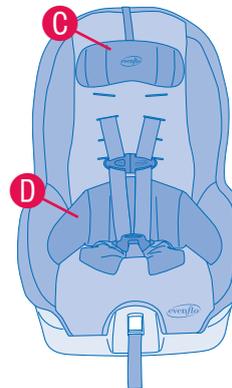


The optional Head Pillow **C** attaches easily and is used to help support the child's head.

**Note:** Styles may vary.

The optional Body Pillow **D** is used to help support your child by placing it in the restraint, as shown.

## Storing Your Instructions



After thoroughly reading and following these instructions, **store them in the clips on either side of your child restraint.**

## Care and Cleaning

- To help protect the vehicle upholstery, place a towel beneath and behind the child restraint.
- Plastic and metal parts may be wiped clean with mild soap and water and dried with a soft cloth. **DO NOT** use abrasive cleaners or solvents.
- Take care not to damage any labels.
- The harness can be wiped clean with mild soap and water. Allow harness to air dry. **DO NOT** immerse buckle in water or lubricate buckle.
- The seat pad can be machine washed separately in cold water, delicate cycle, tumble dry 10 – 15 minutes on low heat.
- **NEVER** use child restraint without the seat pad.
- Leather pads (not available on all models) may be cleaned. For best results spot clean with mild soap and water or with a mixture of 10 parts water to 1 part mild alcohol. Allow to air dry. **DO NOT MACHINE WASH.**

## Proper Disposal of this Child Restraint

At the end of this child restraint's useful life, Evenflo encourages you to dispose of it properly. Most of the components in this child restraint are recyclable.

1. Remove all fabric and padding.
  2. Remove all screws and disassemble the restraint.
  3. Recycle all plastic/foam parts and discard the rest.
- If your local recycling center won't accept the padding, you may dispose of it in the landfill.

**Note:** Evenflo uses recycled materials in the manufacturing process whenever possible but never for components that are critical for safety.

## Replacement Parts

Not available on all models. Styles may vary.

To order replacement parts you can order on-line at [www.evenflo.com](http://www.evenflo.com) or contact Evenflo. When you contact us, please have the product model number and date of manufacture (found on the back of the child restraint).



1 Locking Clip



2 Chest Clip




3 Harness Tie



4 Retainer Strip



5 Tether



6 Harness System



7 LATCH Harness



8 Cup Holder




9 Head Pillow




10 Body Pillow



11 EPS Foam



12 Head Foam



13 Seat pad & Retainer Strips

## ***Limited Warranty***

---

For a period of 90 days from the original purchase of this Product, Evenflo warrants to the original end user (“Purchaser”) this Product (including any accessories) against defects in material or workmanship. Evenflo’s sole obligation under this express limited warranty shall be, at Evenflo’s option, to repair or replace any Product that is determined to be defective by Evenflo and determined to be covered by this warranty.

Repair or replacement as provided under this warranty is the exclusive remedy of the Purchaser. Proof of purchase in the form of a receipted invoice or bill of sale evidencing that the Product is within the warranty period must be presented to obtain warranty service. This express limited warranty is extended by Evenflo ONLY to the original Purchaser of the Product and is not assignable or transferable to subsequent purchasers or end users of the Product. For warranty service, contact Evenflo’s ParentLink Consumer Resource Center at [www.evenflo.com](http://www.evenflo.com).

EXCEPT TO THE EXTENT PROHIBITED BY APPLICABLE LAW, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE ON THIS PRODUCT IS HEREBY DISCLAIMED. EVENFLO SHALL NOT BE LIABLE FOR ANY INCIDENTAL, CONSEQUENTIAL, SPECIAL OR PUNITIVE DAMAGES OF ANY KIND FOR BREACH OF THE EXPRESS LIMITED WARRANTY ON THIS PRODUCT, OR ANY WARRANTY IMPLIED BY OPERATION OF LAW. OTHER THAN THE EXPRESS LIMITED WARRANTY SET FORTH ABOVE, THERE ARE NO OTHER WARRANTIES THAT ACCOMPANY THIS PRODUCT AND ANY ORAL, WRITTEN OR ANY OTHER EXPRESS REPRESENTATION OF ANY KIND IS HEREBY DISCLAIMED.

### **ParentLink®**

answers. advice. affirmation.™

- **USA:** 1-800-233-5921, 8 AM to 5 PM E.T.
- **Canada:** 1-937-773-3971
- **México:** 01-800-706-12-00

# INSTRUCTIONS

**ParentLink®**

answers. advice. affirmation.™

- *USA: 1-800-233-5921, 8 AM to 5 PM E.T.*
  - *Canada: 1-937-773-3971*
  - *México: 01-800-706-12-00*