


Plug-N-Play Retrofit to Pre-Unislide Controllers


5 Pos Switch

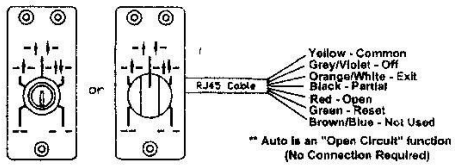

CUD-9 AMD 2


Pin	Function
1	Common
4	Off
3	Exit
2	Partial
13	Open
R	Reset

* Cut plug off RJ45 Cable. Split cable sheath and strip wires as required. Insert in controller terminal block and tighten as per chart for correct operation.

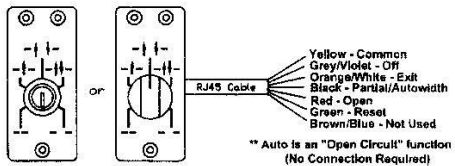

CUD-3CA AMD 1

Pin	Function
23	Common
18	Off
19	Exit
24	Partial or 20 Autowidth
21	Open
22	Reset

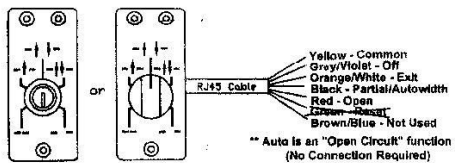


CUA PG4000

Pin	Function
12	Common
9	Off
10	Exit
13	Partial or 15 Autowidth
11	Open
**	Reset @ Controller

Not a switch function

3 Pos Switch

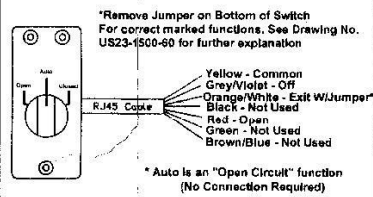

SIZE	FSM NO.	OWG NO.	US23-1500-01	REV
SCALE			3-5 Pos Switch Retro-Fit Instructions	
			SHEET	