



Make delicious results quick and easy leaving plenty of time to relax with the girls.

We love Thursday nights. It's bunko night, our one chance to kick back and have fun with a few friends. When we decided to start getting together, we all agreed on one simple rule: No stress. But how can you relax when everyone will be expecting delicious appetizers all evening? I'll show you. Tonight, the girls are coming over to my place...and I couldn't be happier. Thanks to my advanced GE Profile™ microwave oven, the snacks won't just be simple, they'll be superb. And everything will be ready to serve in seconds. Now, I can spend more time in the game room than the kitchen.

For Advantium® models with Speedcook technology refer to pages 66-69.



Explore Spacemaker® microwave ovens



Model shown: PVM2070





Capacity and wattage

2.0 cu. ft. capacity and 1100 watts provide the maximum in cooking capacity and power.



Dual-distribution cooking system

Circulates microwaves from the top and side of the oven for even heating and defrosting of food.



Convection oven with Auto Recipe™ conversion

Produces flavorful, beautifully browned results. Auto Recipe conversion automatically converts standard recipe temperatures to proper convection settings, eliminating the guesswork.



Warming oven

Keeps prepared foods perfectly warm and fresh.



EasyGuide™ LCD menu system

Uses touchscreen controls to lead users through the exact cooking mode necessary to ensure delicious results.



Soften and Melt features

New convenience features quickly soften or melt foods like butter, ice cream, chocolate and cream cheese.



1-lb. Quick Defrost

Evenly defrosts a pound of meat, poultry or fish in a fraction of the usual time, without precooking or turning the food.



Powerful four-speed with boost 315-CFM venting

Allows you to adjust ventilation levels according to your needs. Boost allows selection of highest CFM with one touch.



Active hidden vent

Out of sight when not in use, the oven vent hides behind the sleek top panel for a sophisticated, easy-to-clean look.



14-1/4" recessed turntable with on/off

Ideal for oversized, oblong-shaped dishes.




Two removable oven racks

Increase cooking flexibility and space.



Sensor cooking controls

Automatically adjust time and power for delicious cooking results.



Help menu

Offers onscreen cooking and troubleshooting tips at the press of a button.



Halogen interior/exterior lighting

Brilliant, natural-looking lighting illuminates every inch of the cooking surface.

Microwave ovens



JVM3670

GE Profile Spacemaker® 1.8 cu. ft. 36" sensor oven

- 36" width application is the ideal match for 36" cooktops
- 1.8 cu. ft. capacity, 1100 Watts*
- CircuWave™ 1100 cooking system delivers fast, consistent results
- Sensor cooking controls
- Active hidden vent automatically opens when fan is in use
- 1-lb. Quick Defrost feature defrosts frozen meat, poultry or fish quickly and evenly
- 14-1/4" recessed turntable with On/Off

 JVM3670SK

 JVM3670WF

 JVM3670CF

 JVM3670BF



CVM2072

GE Café™ 2.0 cu. ft. sensor oven

- 2.0 cu. ft. capacity, 1100 Watts*
- Dual-distribution cooking system circulates microwaves for more even heating and defrosting results
- EasyGuide™ menu system with blue LCD
- Soften, Melt and 1-lb. Quick Defrost features
- Full-width active hidden vent automatically opens when fan is in use
- 14-1/4" recessed turntable with On/Off
- Four-speed** 315-CFM venting system with boost option
- Two removable oven racks

 CVM2072SMSS



 Stainless steel  White  Bisque  Black

Complete features and specifications on pages 276-277.
Bold = feature upgrade from previous model.

*IEC-705 test procedure
 **Includes boost option

**JVM1790****GE Profile Spacemaker 1.7 cu. ft. convection oven**

- 1.7 cu. ft. capacity, 1000 watts*
- Convection and sensor cooking controls
- Fast Bake combines convection and microwave cooking to deliver oven-quality results
- Auto Recipe™ conversion converts standard recipes to convection settings
- Warming oven keeps foods hot and ready to serve
- Two removable oven racks

	JVM1790SK		JVM1790CK
	JVM1790WK		JVM1790BK

**PVM2070****GE Profile Spacemaker 2.0 cu. ft. sensor oven**

- 2.0 cu. ft. capacity, 1100 watts*
- Dual-distribution cooking system circulates microwaves for more even heating and defrosting results
- EasyGuide™ LCD menu system guides you through 92 cooking options
- Soften, Melt and 1-lb. Quick Defrost features
- Full-width active hidden vent automatically opens when fan is in use
- 14-1/4" recessed turntable with On/Off
- Four-speed** 315-CFM venting system with boost option
- Two removable oven racks

	PVM2070SMSS		PVM2070DMCC
	PVM2070DMWW		PVM2070DMBB

**PVM1870/PNM1871****GE Profile Spacemaker 1.8 cu. ft. sensor oven**

- 1.8 cu. ft. capacity, 1100 Watts*
- CircuWave™ 1100 cooking system delivers fast, consistent results
- Sensor cooking controls automatically adjust time and power
- Melt and 1-lb. Quick Defrost features
- Full-width active hidden vent automatically opens when fan is in use
- 14-1/4" recessed turntable with On/Off
- Two removable oven racks

	PVM1870SMSS		PNM1871SMSS (non-vented model)
	PVM1870DMWW		
	PVM1870DMCC		
	PVM1870DMBB		



Microwave ovens



JVM1665

GE Spacemaker® 1.6 cu. ft. grilling oven

- 1.6 cu. ft. capacity, 1000 Watts*
- **1200 Watts grilling power**
- Sensor cooking controls automatically adjust time and power
- **Preprogrammed grill menus make grilling and toasting easy**
- **Easy-set control dial adjusts time and temperature settings**
- **Brick oven red interior**
- **Two-line scrolling display**



JVM1665SNSS



JVM1665DNWW



JVM1665DNBB



JVM1850/JNM1851

GE Spacemaker 1.8 cu. ft. sensor oven

- 1.8 cu. ft. capacity, 1100 Watts*
- **CircuWave™ 1100 cooking system delivers fast, consistent results**
- Sensor cooking controls automatically adjust time and power
- **1-lb. Quick Defrost feature defrosts frozen meat, poultry or fish quickly and evenly**
- **14-1/4" recessed turntable with On/Off**
- **Four-speed**, 300-CFM venting system with boost option**



JVM1850SMSS



JNM1851SMSS
(non-vented model)



JVM1850DMWW



JNM1851DMWW
(non-vented model)



JVM1850DMCC



JNM1851DMCC
(non-vented model)



JVM1850DMBB



JNM1851DMBB
(non-vented model)



JVM1750

GE Spacemaker 1.7 cu. ft. sensor oven

- 1.7 cu. ft. capacity, 1000 Watts*
- **Sensor cooking controls automatically adjust time and power**
- Auto and Time Defrost
- Turntable On/Off
- Two-speed, 300-CFM venting system
- **Removable oven rack with two positions**
- **Full-view cooktop lighting**



JVM1750SMSS



JVM1750DMWW



JVM1750DMCC



JVM1750DMBB



Stainless steel
 White
 Bisque
 Black

Complete features and specifications on page 278.

Bold = feature upgrade from previous model.

*IEC-705 test procedure

**Includes boost option

**JVM1740****GE Spacemaker 1.7 cu. ft. oven**

- 1.7 cu. ft. capacity, 1000 Watts*
- Convenience cooking controls allow quick and easy operation
- Auto and Time Defrost
- **Turntable On/Off**
- Two-speed, 300-CFM venting system
- **Removable oven rack**
- Full-view cooktop lighting

-  JVM1740SMSS
 JVM1740DMWW
 JVM1740DMCC
 JVM1740DMBB

**JVM1730/JNM1731****GE Spacemaker 1.7 cu. ft. oven**

- 1.7 cu. ft. capacity, 1000 Watts*
- Convenience cooking controls allow quick and easy operation
- Auto and Time Defrost
- Turntable
- Full-view cooktop lighting
- Two-speed, 300-CFM venting system
- 10 power levels

-  JVM1730DMWW  JNM1731DMWW (non-vented model)
 JVM1730DMCC  JNM1731DMCC (non-vented model)
 JVM1730DMBB  JNM1731DMBB (non-vented model)

**JVM1540/JNM1541****GE Spacemaker 1.5 cu. ft. oven**

- 1.5 cu. ft. capacity, 950 Watts*
- Convenience cooking controls allow quick and easy operation
- Auto and Time Defrost
- Turntable On/Off
- Two-speed, 300-CFM venting system
- Removable oven rack
- Full-view cooktop lighting

-  JVM1540SMSS  JNM1541SMSS (non-vented model)
 JVM1540LMCS†  JNM1541DMWW (non-vented model)
 JVM1540DMWW  JNM1541DMCC (non-vented model)
 JVM1540DMCC  JNM1541DMBB (non-vented model)
 JVM1540DMBB



 Stainless steel
  CleanSteel
  White
  Bisque
  Black

†CleanSteel model features a black handle

Unbelievably extraordinary



From clean, sleek exteriors to large interior capacities and easy-to-use, advanced touch controls, these GE® and GE Profile™ countertop microwave ovens provide delicious home cooking in a fraction of the time. Innovative inverter technology, cooking elements and many more progressive features make these convenient, elegant and anything but ordinary.

Explore countertop microwave ovens



Convection/combination cooking

Combines microwave with traditional radiant heat to bake and roast foods with accuracy.



Inverter technology

Delivers constant power for precise performance, even on low settings such as “warm”.



Double-grill technology

Uses top and bottom radiant heating elements to ensure even browning on both sides of food.



Convenience cooking

Offers preprogrammed settings for reheating and defrosting of everyday foods.



Top-browning capability

Crisps food on the surface by using a top heating element.



Auto & Time Defrost

Automatically defrosts for a specified amount of time or weight.



Sensor cooking

Uses built-in sensors to automatically set power and time based on food moisture levels.



Soften and melt

Exceptional for heavy foods like butter and cream cheese, as well as frozen ice cream.

Microwave ovens



PEB1590

GE Profile™ 1.5 cu. ft. convection oven

- 1.5 cu. ft. capacity, 1000 Watts**
- **Convection and sensor cooking controls**
- Control dial adjusts time and temperature settings
- Optional trim kit† for built-in installation provides a custom appearance
- **Removable oven rack for bi-level cooking**
- **Recessed turntable**



-  PEB1590SMSS
-  PEB1590DMWW
-  PEB1590DMCC
-  PEB1590DMBB



PEB2060

GE Profile 2.0 cu. ft. sensor oven

- **2.0 cu. ft. capacity, 1200 Watts****
- Sensor cooking controls automatically adjust time and power
- Optional trim kit† for built-in installation provides a custom appearance
- Auto and Time Defrost
- **Extra-large 16" turntable**
- Instant On controls for one-touch operation
- Control lockout



-  PEB2060SMSS
-  PEB2060DMWW
-  PEB2060DMCC
-  PEB2060DMBB



 Stainless steel  White  Bisque  Black

Complete features and specifications on page 280.

Bold = feature upgrade from previous model.

*See page 212 for ADA requirements.

**IEC-705 test procedure

†Optional trim kits available in 27" and 30" configurations sold separately. Refer to page 282 for installation options and model numbers.

Microwave ovens



PEM31
GE Profile™ 1.0 cu. ft. sensor oven

- 1.0 cu. ft. capacity, 800 Watts**
- **Optional trim kit†** for built-in installation provides a custom appearance
- **Optional hanging kit††** for undercabinet mounting
- Sensor cooking controls automatically adjust time and power
- Auto and Time Defrost
- Turntable On/Off
- Control lockout

- PEM31SMSS
- PEM31DMWW
- PEM31DMCC
- PEM31DMBB



JES2251
GE Profile 2.2 cu. ft. inverter oven

- 2.2 cu. ft. capacity, 1200 Watts**
- **Inverter technology** provides consistent heat for better results
- Sensor cooking controls automatically adjust time and power
- Auto and Time Defrost
- **Warm feature** keeps foods hot and ready to serve
- **Soften/melt capability**
- **Extra-large 16" turntable**
- Stainless steel exterior

- JES2251SJ



○ Stainless steel ○ White ○ Bisque ● Black

Complete features and specifications on pages 279-280.
Bold = feature upgrade from previous model.
*See page 212 for ADA requirements.

**IEC-705 test procedure
†Optional trim kits available in 27" and 30" configurations sold separately.
Refer to page 282 for installation options and model numbers.
††Optional undercabinet mounting kit sold separately.
Refer to page 281 for installation options and model numbers.

**JEB1860**

GE® 1.8 cu. ft. sensor oven

- 1.8 cu. ft. capacity, 1100 Watts**
- Sensor cooking controls automatically adjust time and power
- Auto and Time Defrost
- Optional trim kit† for built-in installation provides a custom appearance
- Turntable On/Off
- Instant On controls for one-touch operation
- Control lockout



-  JEB1860SMSS
-  JEB1860DMWW
-  JEB1860DMCC
-  JEB1860DMBB

**JEM25**

GE Spacemaker II™ 1.0 cu. ft. oven

- 1.0 cu. ft. capacity, 800 Watts**
- Optional trim kit† for built-in installation provides a custom appearance
- Optional hanging kit†† for undercabinet mounting
- Convenience cooking controls allow quick and easy operation
- Auto and Time Defrost
- Turntable On/Off
- Kitchen timer

-  JEM25DMWW
-  JEM25DMBB



Microwave ovens



JES1290
GE® 1.2 cu. ft. convection oven

- 1.2 cu. ft. capacity, 1000 Watts*
- **Combination cooking uses convection and microwave for enhanced results**
- Double grill technology combines top and bottom heating elements
- Removable oven rack for bi-level cooking
- Convenience cooking controls allow quick and easy operation
- Stainless steel exterior and interior
- Auto and Time Defrost

 JES1290SK



JES1288
GE 1.2 cu. ft. oven

- 1.2 cu. ft. capacity, 1000 Watts*
- **Double grill technology combines top and bottom heating elements**
- **Control dial with preprogrammed menu items**
- **Removable oven rack for bi-level cooking**
- Convenience cooking controls allow quick and easy operation
- **Stainless steel exterior and interior**
- Auto and Time Defrost

 JES1288SH



JES1384
GE 1.3 cu. ft. oven

- 1.3 cu. ft. capacity, 1000 Watts*
- **Top browning capability**
- Convenience cooking controls allow quick and easy operation
- Stainless steel exterior
- Auto and Time Defrost
- Turntable
- Control lockout

 JES1384SF



 Stainless steel

**JES1344****GE 1.3 cu. ft. oven**

- 1.3 cu. ft. capacity, 1000 Watts*
- Convenience cooking controls allow quick and easy operation
- Auto and Time Defrost
- **Stainless steel exterior**
- Turntable
- Instant On controls for one-touch operation
- Control lockout



JES1344SK

**JE1460****GE 1.4 cu. ft. sensor oven**

- 1.4 cu. ft. capacity, 1150 Watts*
- Sensor cooking controls automatically adjust time and power
- Auto and Time Defrost
- **Recessed turntable**
- Instant On controls for one-touch operation
- Control lockout
- Timer on/off



JE1460WF



JE1460BF

**JES1334****GE 1.3 cu. ft. oven**

- 1.3 cu. ft. capacity, 1100 Watts*
- Convenience cooking controls allow quick and easy operation
- Auto and Time Defrost
- Turntable
- Instant On controls for one-touch operation
- Control lockout
- Kitchen timer



JES1334WD



JES1334BH



Microwave ovens



JE1160

GE® 1.1 cu. ft. sensor oven

- 1.1 cu. ft. capacity, 1100 Watts*
- **Sensor cooking controls automatically adjust time and power**
- Auto and Time Defrost
- Turntable
- Instant On controls
- Kitchen timer
- Control lockout



JE1160WD



JE1160BD



JES1142

GE 1.1 cu. ft. oven

- 1.1 cu. ft. capacity, 1100 Watts*
- Convenience cooking controls allow quick and easy operation
- Auto and Time Defrost
- **Stainless steel exterior**
- Turntable
- Instant On controls for one-touch operation
- Control lockout



JES1142SJ



JES1139

GE 1.1 cu. ft. oven

- **1.1 cu. ft. capacity, 1100 Watts***
- Convenience cooking controls allow quick and easy operation
- Auto and Time Defrost
- Turntable
- Instant On controls for one-touch operation
- Control lockout
- Kitchen timer



JES1139WL



JES1139BL



Stainless steel White Black

Complete features and specifications on page 281.

Bold = feature upgrade from previous model.

*IEC-705 test procedure

**Optional undercabinet mounting kit sold separately.

Refer to page 281 for installation options and model numbers.



Model shown with optional hanging kit JXA019K

JE740

GE 0.7 cu. ft. oven

- 0.7 cu. ft. capacity, 700 Watts*
- **Optional hanging kit** for undercabinet mounting**
- Convenience cooking controls allow quick and easy operation
- Auto Defrost
- Turntable
- Control lockout
- Instant On controls for one-touch operation

○ JE740WK

● JE740BK



JES0736

GE 0.7 cu. ft. oven

- 0.7 cu. ft. capacity, 700 Watts*
- Convenience cooking controls allow quick and easy operation
- Auto Defrost
- **Stainless steel exterior**
- Turntable
- Kitchen timer
- Control lockout

○ JES735WJ

● JES735BJ



JES735

GE 0.7 cu. ft. oven

- 0.7 cu. ft. capacity, 700 Watts*
- Convenience cooking controls allow quick and easy operation
- Auto Defrost
- Turntable
- Kitchen timer
- Control lockout
- Instant On controls for one-touch operation

○ JES735WJ

● JES735BJ



Warranty Information*

The condensed list below is a convenient overview of the written warranties offered on various GE appliances described in this catalog for products manufactured on or after January 1, 2006. For complete warranty details on a specific GE appliance model, contact your nearest GE supplier, or call GE Factory Service, toll-free, 800-GE-CARES (800-432-2737).

Refrigerators, wine and beverage centers

(All GE Profile™/GE Café™ models)

For the period of	GE will replace
One year From the date of the original purchase	Any part in the refrigerator which fails due to a defect in materials or workmanship. During this limited one-year warranty , GE will provide, free of charge , all labor and related service costs to replace the defective part.
Five years From the date of the original purchase	Any part of the sealed refrigerating system (the compressor, condenser, evaporator and all connecting tubing) which fails due to a defect in materials or workmanship. During this limited five-year sealed refrigerating system warranty , GE will also provide, free of charge , all labor and related service costs to replace the defective part.

Refrigerators, freezers, wine and beverage centers (All GE® models)

For the period of	GE will replace
One year From the date of the original purchase	Any part in the refrigerator which fails due to a defect in materials or workmanship. During this limited one-year warranty , GE will provide, free of charge , all labor and related service costs to replace the defective part.

Icemakers

For the period of	GE will replace
One year From the date of the original purchase	Any part in the icemaker which fails due to a defect in materials or workmanship. During this limited one-year warranty , GE will provide, free of charge , all labor and related service costs to replace the defective part.

Water filter

For the period of	GE will replace
30 days From the date of the original purchase	Any part of the water filter cartridge which fails due to a defect in materials or workmanship. During this limited 30-day warranty , you will be responsible for any labor and related service costs.

Advantium® ovens

For the period of	GE will replace
One year From the date of the original purchase	Any part of the oven which fails due to a defect in materials or workmanship. During this limited one-year warranty , GE will provide, free of charge , all labor and related service costs to replace the defective part.
Second through fifth year From the date of the original purchase	Magnetron Tube , if the magnetron tube should fail due to a defect in materials or workmanship. During this additional four-year limited warranty , you will be responsible for any labor and related service costs.

GE Profile Trivection® technology wall ovens/slide-in ranges

For the period of	GE will replace
One year From the date of the original purchase	Any part in the cooking product which fails due to a defect in materials or workmanship. During this limited one-year warranty , GE will provide, free of charge , all labor and related service costs to replace the defective part.
Second through fifth year (Slide-In Range only) From the date of the original purchase	Glass cooktop, radiant surface units , if the glass cooktop should crack due to thermal shock, discolor or if the pattern wears off, or if any of the radiant surface units should burn out. During this additional four-year limited warranty , you will be responsible for all labor and related service costs to replace the defective part.
Second through fifth year From the date of the original purchase	Magnetron tube , if the magnetron tube should fail due to a defect in materials or workmanship. During this additional four-year limited warranty , you will be responsible for any labor and related service costs.

GE Profile/GE Café ranges/cooktops/built-in ovens/warming drawers/hoods

For the period of	GE will replace
One year From the date of the original purchase	Any part in the cooking product which fails due to a defect in materials or workmanship. During this limited one-year warranty , GE will provide, free of charge , all labor and related service costs to replace the defective part.
Second through fifth year From the date of the original purchase	Glass cooktop, radiant surface units , if the glass cooktop should crack due to thermal shock, discolor, crack at the rubber seal between the glass cooktop and the porcelain edge or if the pattern wears off, or if any of the radiant surface units burn out. During this additional four-year limited warranty , you will be responsible for all labor and related service costs to replace the defective part.

GE ranges/cooktops/built-in ovens/warming drawers/hoods

For the period of	GE will replace
One year From the date of the original purchase	Any part in the cooking product which fails due to a defect in materials or workmanship. During this limited one-year warranty , GE will provide, free of charge , all labor and related service costs to replace the defective part.

GE Profile/GE Café microwave ovens

For the period of	GE will replace
One year From the date of the original purchase	Any part in the microwave which fails due to a defect in materials or workmanship. During this limited one-year warranty , GE will also provide, free of charge , all labor and in-home service to replace the defective part.
Second through fifth year From the date of the original purchase	Magnetron Tube , if the magnetron tube should fail due to a defect in materials or workmanship. During this additional four-year limited warranty , you will be responsible for any labor and related service costs.

GE microwave ovens

For the period of	GE will replace
One year From the date of the original purchase	Any part in the microwave which fails due to a defect in materials or workmanship. During this limited one-year warranty , GE will provide, free of charge , all labor and related service costs to replace the defective part.

GE Profile/GE Café dishwashers

For the period of	GE will replace
One year From the date of the original purchase	Any part in the dishwasher which fails due to a defect in materials or workmanship. During this limited one-year warranty , GE will provide, free of charge , all labor and related service costs to replace the defective part.
Second through fifth year From the date of the original purchase	Racks or Electronic Control Board , if either the racks or electronic control board should fail due to a defect in materials or workmanship. During this additional four-year limited warranty , you will be responsible for any labor and related service costs.
Lifetime of product From the date of the original purchase	Tub or Door Liner , if either the tub or door liner should fail due to a defect in materials or workmanship. During this limited product lifetime warranty , GE will provide, free of charge , all labor and related service costs to replace the defective part.

GE dishwashers

For the period of	GE will replace
One year From the date of the original purchase	Any part in the dishwasher which fails due to a defect in materials or workmanship. During this limited one-year warranty , GE will provide, free of charge , all labor and related service costs to replace the defective part.

Warranty Information* (continued)

Compactors

For the period of	GE will replace
One year From the date of the original purchase	Any part in the compactor which fails due to a defect in materials or workmanship. During this limited one-year warranty , GE will provide, free of charge , all labor and related service costs to replace the defective part.

Disposers

For the period of	GE will replace
One year From the date of the original purchase	The entire disposer if there is a defect in materials or workmanship relating to functional parts only (appearance parts are excluded). During this limited one-year warranty , GE will also provide, free of charge , all labor charges related to replacing the original disposer.

GE Profile™ washers

For the period of	GE will replace
One year From the date of the original purchase	Any part in the washer which fails due to a defect in materials or workmanship. During this limited one-year warranty , GE will provide, free of charge , all labor and related service costs to replace the defective part.
Second through fifth year From the date of the original purchase	Suspension Rod and Spring Assembly, and Main Electronic Control Board, frontload suspension strut assembly, motor and motor controller , if any of these parts should fail due to a defect in materials or workmanship. GE will also replace the Washer Lid or Cover, top, front, or service panel if they should rust under operating conditions. During this additional four-year limited warranty , you will be responsible for any labor and related service costs.
Second through tenth year From the date of the original purchase	Shaft and Tube Assembly and Outer tub, and driven pulley (frontload only) or Direct Drive (Harmony washer only) , if any of these parts should fail due to a defect in materials or workmanship. During this additional nine-year limited warranty , you will be responsible for any labor and related service costs.
Lifetime of product	Basket , if the basket should fail due to a defect in materials or workmanship. During this product lifetime limited warranty , you will be responsible for any labor and related service costs.

GE® washers, frontload washers, non-coin commercial washer and SmartDispense™ pedestal

For the period of	GE will replace
One year From the date of the original purchase	Any part in the washer which fails due to a defect in materials or workmanship. During this limited one-year warranty , GE will provide, free of charge , all labor and related service costs to replace the defective part.

GE Profile dryers

For the period of	GE will replace
One year From the date of the original purchase	Any part in the dryer which fails due to a defect in materials or workmanship. During this limited one-year warranty , GE will provide, free of charge , all labor and related service costs to replace the defective part.
Second year From the date of the original purchase	Any part of the dryer which fails due to a defect in materials or workmanship. During this additional one-year limited warranty , you will be responsible for any labor and related service costs.
Third through fifth year From the date of the original purchase	Dryer Drum and Main Electronic Control Panel , if either of these parts should fail due to a defect in materials or workmanship. During this additional three-year limited warranty , you will be responsible for any labor and related service costs.

GE dryers, frontload dryers and non-coin commercial dryer

For the period of	GE will replace
One year From the date of the original purchase	Any part in the dryer which fails due to a defect in materials or workmanship. During this limited one-year warranty , GE will provide, free of charge , all labor and related service costs to replace the defective part.

GE coin commercial washers and dryers (Models WNCK2050, DNCK440E/G, WCCB1030, WCRD2050, WCCD2050, WMCD2050, WCCH404, DCCD330E/G, DCCB330E/G, DDC4400, DDC4500)

For the period of	GE will replace
Three years From the date of the original purchase	Any part in the washer or dryer which fails due to a defect in materials or workmanship. During this limited three-year warranty , you will be responsible for any labor and related service costs.
Fourth through fifth year From the date of the original purchase	Outer Tub, Inner Basket, Dryer Drum and Cabinet Rust-Through , if any of these parts prove to be defective in materials or workmanship. During this additional two-year limited warranty , you will be responsible for any labor and related service costs.

GE coin commercial washer and dryer

(Models WMCD2050 and DMCD330E/G)

For the period of	GE will replace
90 days From the date of the original purchase	Any part of the washer or dryer (except the coin system) which fails due to a defect in materials or workmanship. During this limited 90-day warranty , GE will also provide, free of charge , all labor and related service original purchase to replace the defective part.
Three years From the date of the original purchase	Any part of the washer or dryer which fails due to a defect in materials or workmanship. During this limited three-year warranty , you will be responsible for any labor and related service costs.
Fourth through fifth year From the date of the original purchase	The outer tub and inner basket/dryer drum , if either of these parts should fail due to a defect in materials or workmanship, and the cabinet side panels, base and cover , if they should fail due to rust-through. During this limited additional two-year warranty , you will be responsible for any labor and related service costs.

GE coin frontload dryer (Model DCCH43E/G)

For the period of	GE will replace
Three years From the date of the original purchase	Any part in the washer or dryer which fails due to a defect in materials or workmanship. During this limited three-year warranty , you will be responsible for any labor and related service costs.

GE Profile reverse osmosis filtration systems

For the period of	GE will replace
One year From the date of the original purchase	Any part of the Reverse Osmosis Filtration System (excluding filters) which fails due to a defect in materials or workmanship. During this limited one-year warranty , GE will provide, free of charge , all labor and related service costs to replace the defective part.

GE reverse osmosis filtration system

For the period of	GE will replace
One year From the date of the original purchase	Any part of the Reverse Osmosis Filtration System (excluding filters) which fails due to a defect in materials or workmanship. During this limited one-year warranty , GE will provide, free of charge , all labor (does not include trip charge to home or other service costs) to replace the defective part.

GE water filtration and household filtration

For the period of	GE will replace
One year From the date of the original purchase	Any part of the Water Filtration System (excluding filters) which fails due to a defect in materials or workmanship. During this limited one-year warranty , GE will provide, free of charge , all labor and related service costs to replace the defective part.

GE water softeners

For the period of	GE will replace
One year From the date of the original purchase	Any part of the Water Softening System which fails due to a defect in materials or workmanship. During this limited one-year warranty , GE will provide, free of charge , all labor and related service costs to replace the defective part.
Second through third year From the date of the original purchase	Electronic Monitor , if the Electronic Monitor fails due to a defect in materials or workmanship. During this additional two-year limited warranty , you will be responsible for any labor and related service costs.
Second through tenth year From the date of the original purchase	Cabinet (Brine Tank) and Resin Tank , if either of these parts fail due to a defect in materials or workmanship. During this additional nine-year limited warranty , you will be responsible for any labor and related service costs.

GE tankless water heater

For the period of	GE will replace
One year From the date of the original purchase	Any part of the Tankless Water Heater which fails due to a defect in materials or workmanship. During this limited one-year warranty , GE will also provide, free of charge , all labor and related service to replace the defective part.
Second through fifth year From the date of the original purchase	Any part of the Tankless Water Heater which fails due to a defect in materials or workmanship. During this limited five-year warranty , labor is not included.
Second through tenth year From the date of the original purchase	Any part of the heat exchanger which fails due to a defect in materials or workmanship. During this limited ten-year warranty , labor is not included.

Air conditioners (Built-In)

For the period of	GE will replace
One year From the date of the original purchase	Any part in the air conditioner which fails due to a defect in materials or workmanship. During this limited one-year warranty , GE will provide, free of charge , all labor and related service costs to replace the defective part.
Five years From the date of the original purchase	Sealed Refrigerating System , if the Sealed Refrigerating System (compressor, condenser, evaporator and all connecting tubing) should fail due to a defect in materials or workmanship. During this limited five-year warranty , GE will provide, free of charge , all labor and related service costs to replace the defective part.

Air conditioners (Zonline® and Vertical Zonline)

For the period of	GE will replace
One year From the date of the original purchase	Any part of the air conditioner which fails due to a defect in materials or workmanship. During this limited one-year warranty , GE will provide, free of charge , all labor and related service costs to replace the defective part.
Five years From the date of the original purchase	Sealed Refrigerating System , if any part of the Sealed Refrigerating System (the compressor, condenser, evaporator, and all connecting tubing) should fail due to a defect in materials or workmanship. During this limited five-year warranty , GE will provide, free of charge , all labor and related service costs to replace the defective part.
Second through fifth year (Zonline only) From the date of the original purchase	Fan Motors, Switches, Thermostat, Heater, Heater Protectors, Compressor Overload, Solenoids, Circuit Boards, Auxiliary Controls, Thermistors, Freeze Sentinel, Frost Controls, ICR Pump, Capacitors, Varistors and Indoor Blower Bearing , if any of these parts should fail due to a defect in materials or workmanship. During this additional four-year limited warranty , you will be responsible for any labor and related service costs.
Second through fifth year (vertical Zonline only) From the date of the original purchase	Fan Motors, Switches, Heater, Heater Protectors, Compressor Overload, Solenoids, Circuit Boards, Auxiliary Controls, Thermistors, Frost Controls, ICR Pump, Capacitors, Varistors and Indoor Blower Bearing , if any of these parts should fail due to a defect in materials or workmanship. During this additional four-year limited warranty , you will be responsible for any labor and related service costs.

EXCLUSION OF IMPLIED WARRANTIES - Your sole and exclusive remedy is product repair as provided in this Limited Warranty. Any implied warranties, including the implied warranties of merchantability or fitness for a particular purpose, are limited to one year or the shortest period allowed by law.

*See written warranty for complete details.

This warranty is extended to the original purchaser and any succeeding owner for products purchased for home use within the USA. In Alaska, the One-Year Warranty excludes the cost of shipping, or service calls to your home. Some states do not allow the exclusion or limitation of incidental or consequential damages. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state. To know what your legal rights are, consult your local or state consumer affairs office or your state's Attorney General.

What GE will not cover:

- Service trips to your home to teach you how to use the product.
- Improper installation.
- Replacement of house fuses or resetting of circuit breakers.
- Failure of the product if it is abused, misused or used for anything other than the intended purpose or used commercially.
- Damage to product caused by accident, fire, floods or acts of God.
- Incidental or consequential damage caused by possible defects with this appliance.

ADA requirements

Refrigerator/Freezers

Top freezers

Regulation #/ Description:

4.2.5—maximum high forward reach for controls and operating mechanisms is 48", maximum low forward reach is 15";

4.27.4—controls and operating mechanisms must be operable with one hand and shall not require tight grasping, pinching, or twisting of the wrist. The force required to activate controls shall be no more than 5lbf;

4.34.6.8—refrigerators must have at least 50% of the freezer space below 54" from the floor and 100% of the fresh food space below 54" from the floor. Freezers with less than 100% storage volume between 15" to 48" shall be the self-defrosting type.

Wall ovens

Single self-clean ovens

Regulation #/ Description:

4.2.5—maximum high forward reach for controls and operating mechanisms is 48", maximum low forward reach is 15";

4.27.4—controls and operating mechanisms must be operable with one hand and shall not require tight grasping, pinching, or twisting of the wrist. The force required to activate controls shall be no more than 5lbf;

4.34.6.7—ovens shall have controls on front panels; they may be located on either side of the door.

Slide-in/Drop-in range

Electric and Gas

Regulation #/ Description:

4.2.5—maximum high forward reach for controls and operating mechanisms is 48", maximum low forward reach is 15";

4.27.4—controls and operating mechanisms must be operable with one hand and shall not require tight grasping, pinching, or twisting of the wrist. The force required to activate controls shall be no more than 5lbf;

4.34.6.6—if ovens or cooktops have knee spaces underneath then they shall be insulated or otherwise protected on the exposed surfaces to prevent burns, abrasions, or electrical shock. The location of controls for ranges and cooktops shall not require reaching across burners.

Electric cooktops

Front control

Regulation #/ Description:

4.2.5—maximum high forward reach for controls and operating mechanisms is 48", maximum low forward reach is 15";

4.27.4—controls and operating mechanisms must be operable with one hand and shall not require tight grasping, pinching, or twisting of the wrist. The force required to activate controls shall be no more than 5lbf;

4.34.6.6—if ovens or cooktops have knee spaces underneath then they shall be insulated or otherwise protected on the exposed surfaces to prevent burns, abrasions, or electrical shock. The location of controls for ranges and cooktops shall not require reaching across burners.

Gas cooktops

Regulation #/ Description:

4.2.5—maximum high forward reach for controls and operating mechanisms is 48", maximum low forward reach is 15";

4.27.4—controls and operating mechanisms must be operable with one hand and shall not require tight grasping, pinching, or twisting of the wrist. The force required to activate controls shall be no more than 5lbf;

4.34.6.6—if ovens or cooktops have knee spaces underneath then they shall be insulated or otherwise protected on the exposed surfaces to prevent burns, abrasions, or electrical shock. The location of controls for ranges and cooktops shall not require reaching across burners.

Free-standing range

Gas & Electric

Regulation #/ Description:

4.2.5—maximum high forward reach for controls and operating mechanisms is 48", maximum low forward reach is 15";

4.27.4—controls and operating mechanisms must be operable with one hand and shall not require tight grasping, pinching, or twisting of the wrist. The force required to activate controls shall be no more than 5lbf;

4.34.6.6—if ovens or cooktops have knee spaces underneath then they shall be insulated or otherwise protected on the exposed surfaces to prevent burns, abrasions, or electrical shock. The location of controls for ranges and cooktops shall not require reaching across burners.

Microwave ovens

Regulation #/ Description:

4.2.5—maximum high forward reach for controls and operating mechanisms is 48", maximum low forward reach is 15";

4.27.4—controls and operating mechanisms must be operable with one hand and shall not require tight grasping, pinching, or twisting of the wrist. The force required to activate controls shall be no more than 5lbf.

Dishwasher

Regulation #/ Description:

4.2.5—maximum high forward reach for controls and operating mechanisms is 48", maximum low forward reach is 15";

4.27.4—controls and operating mechanisms must be operable with one hand and shall not require tight grasping, pinching, or twisting of the wrist. The force required to activate controls shall be no more than 5lbf;

4.34.6.9—all rack space shall be accessible from the front of the machine for loading and unloading dishes.

Sink and surrounding counter shall be 34" after installation—impacts DWs installed next to sink. If installed away from sink, all models comply.

Laundry

Regulation #/ Description:

4.2.5—maximum high forward reach for controls and operating mechanisms is 48", maximum low forward reach is 15";

4.27.4—controls and operating mechanisms must be operable with one hand and shall not require tight grasping, pinching, or twisting of the wrist. The force required to activate controls shall be no more than 5lbf;

4.34.7.2—washing machines and clothes dryers shall be front loading.

The height of laundry machine openings must be a maximum of 34" above the floor for top-loading machines and between 15" to 34" for front-loading machines.

Room air conditioners

Regulation #/ Description:

4.2.5—maximum high forward reach for controls and operating mechanisms is 48", maximum low forward reach is 15";

4.27.4—controls and operating mechanisms must be operable with one hand and shall not require tight grasping, pinching, or twisting of the wrist. The force required to activate controls shall be no more than 5lbf.


GE has a policy of continuous improvement of its products and reserves the right to change materials and specifications without notice.

GE Profile Spacemaker® convection/microwave ovens

GE Profile™	
JVM1790SK JVM1790WK JVM1790CK JVM1790BK	
Capacity	
Oven cavity (cu. ft.)	1.7
Features	
Watts—microwave (IEC-705 test procedure)	1000
Heater wattage	1550
Controls	Membrane/dial
SmartControl system w/interactive display	●
Electronic scrolling digital display w/clock and AM/PM	2-line
Variable scroll speed	5 speed
Help pad	●
Concurrent programming	●
Display On/Off	●
Bilingual display (English/Spanish)	●
Cavity lighting	Halogen
Cooktop lighting	Halogen
Turntable	On/Off
Sensor controls	Cook Chicken, Fish, Potato
	Popcorn
	Reheat
	Vegetables (canned/fresh/frozen)
Convection controls	Convection Bake
	Fast Bake
	Warm
Auto Recipe™ conversion	●
Instant On controls	●
Time cook	I & II
Add 30 Seconds	●
Temp cook	●
Auto/Time defrost	● / ●
Fast defrost	●
Power levels	10
Programmable night light	●
Timer On/Off	●
Variable beeper volume control	4 levels
Cooking complete reminder	●
Control lockout	●
300-CFM vent fan	3 speed
Appearance	
Stainless steel	
White	
Bisque	
Black	
Black	
White	
Bisque	
Black	
Color appearance	
Case color	
Sculptured handle	●
Weights & Dimensions	
WxHxD (in inches)	21-5/9 x 9-6/15 x 14-1/4
Exterior	29-15/16 x 16-7/16 x 15-3/8
Approx. shipping weight (lbs.)	68
Power/Ratings	
Input Volt/Hertz	120V/60Hz
Input Amps/Watts (max)	15A/1.5KW
Accessories	
Convection rack	2 (2 positions)
Cooking guide	●
Recirculating charcoal filter kit†	Optional
	JX41
	JX40WH
	N/A
	JX41
Filler panel kit (optional for 36" installation)	
Warranty	
Limited one-year in-home warranty*	●
Limited five-year magnetron warranty*	●

*See written warranty for details.
†Optional for units that are not set as recirculating from the factory

Dimensions (in inches)

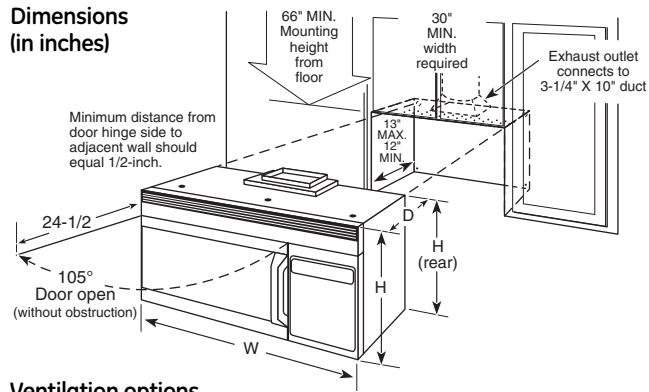

Ventilation options

The Spacemaker convection/microwave and Spacemaker microwave ovens are designed for adaptation to the following three types of ventilation:

Outside exhaust (Vertical—as shown above)

Outside exhaust (Horizontal)

Recirculating (Non-vented ductless—see Filter Kit Drawing, order JX81A, JX81B, JX81D, JX81H or JX81J)

Requires 120V grounded outlet. Electrical receptacle must be located in cabinet above Spacemaker microwave/convection and Spacemaker microwave ovens. No additional wiring, venting or cabinet rebuilding necessary in many cases. Complete detailed, easy-to-follow installation instructions and convenient full-size templates are packed with product.

Important: When installing these ovens over a range, allow minimum of 2" from bottom of microwave oven to top of range backguard to allow for removal of light covers.

Optional accessories


(Sold separately)

Filler panel kit

See below for part numbers.

When replacing a 36" range hood, this kit fills in the additional width to provide a custom built-in appearance. For installation between cabinets only; not for end-of-cabinet installation.

Each kit contains two 3"-wide filler panels.

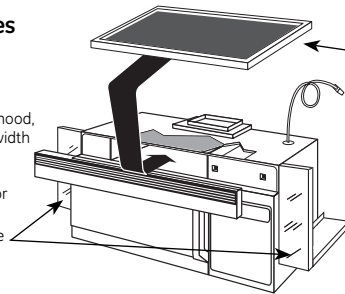

Recirculating Charcoal Filter kit†

See below for part numbers.

To be used when the Spacemaker microwave oven cannot be vented to the outside. (Included with non-vented models.)

†Optional for units that are not set as recirculating from the factory

Model	Recirculating charcoal filter kit	Filler panel kit*
JVM1540SMSS	JX81C	JX41
JVM1540LMCS	JX81C	JX41
JVM1540DMWW	JX81C	JX40WH
JVM1540DMCC	JX81C	—
JVM1540DMBB	JX81C	JX41
JNM1541SMSS	JX81C	JX41
JNM1541DMWW	JX81C	JX40WH
JNM1541DMCC	JX81C	—
JNM1541DMBB	JX81C	JX41
JVM1730DMWW	JX81A	JX48WH
JVM1730DMCC	JX81A	—
JVM1730DMBB	JX81A	JX48BL
JNM1731DMWW	JX81A	JX48WH
JNM1731DMCC	JX81A	—
JNM1731DMBB	JX81A	JX48BL
JVM1740SMSS	JX81A	—
JVM1740DMWW	JX81A	JX48WH
JVM1740DMCC	JX81A	—
JVM1740DMBB	JX81A	JX48BL
JVM1750SMSS	JX81A	JX48BL
JVM1750DMWW	JX81A	JX48WH
JVM1750DMCC	JX81A	—
JVM1750DMBB	JX81A	JX48BL
JVM1850SMSS	JX81B	JX52BL
JVM1850DMWW	JX81B	JX52WH
JVM1850DMCC	JX81B	—
JVM1850DMBB	JX81B	JX52BL
JNM1851SMSS	JX81B	JX52BL
JNM1851DMWW	JX81B	JX52WH
JNM1851DMCC	JX81B	—
JNM1851DMBB	JX81B	JX52BL
JVM1665SNSS	JX81A	JX52BL
JVM1665DNWW	JX81A	JX52WH
JVM1665DNBB	JX81A	JX52BL

Model	Recirculating charcoal filter kit	Filler panel kit*
PVM1870SMSS	JX81B	JX52BL
PVM1870DMWW	JX81B	JX52WH
PVM1870DMCC	JX81B	—
PVM1870DMBB	JX81B	JX52BL
PNM1871SMSS	JX81B	JX52BL
JVM3670SK	JX81B	—
JVM3670WF	JX81B	—
JVM3670CF	JX81B	—
JVM3670BF	JX81B	—
PVM2070SMSS	JX81H	JX52BL
PVM2070DMWW	JX81H	JX52WH
PVM2070DMCC	JX81H	—
PVM2070DMBB	JX81H	JX52BL
CVM2072SMSS	JX81H	JX52BL
JVM1790SK	JX81D	JX41
JVM1790WK	JX81D	JX40WH
JVM1790CK	JX81D	—
JVM1790BK	JX81D	JX41
SCA1001KSS	JX81A	JX41
SCA1000HWW	JX81A	JX40WH
SCA1000HCC	JX81A	—
SCA1000HBB	JX81A	JX41
SCA2001KSS	JX81A	JX41
SCA2000FWW	JX81A	JX40WH
SCA2000FBB	JX81A	JX41



Listed by Underwriters Laboratories

This information is not intended to be used for installing unit described. Before installing, consult installation instructions packed with product/kit for current dimensional data.

*For 36" installation.

GE® over-the-range microwave ovens

GE									
	JVM1665SS JVM1665DN	JNM1851SM* JNM1851DM*	JVM1850SM JVM1850DM	JVM1750SM JVM1750DM	JVM1740SM JVM1740DM	JNM1731DM*	JVM1730DM	JNM1541SM* JNM1541DM*	JVM1540SM JVM1540LM JVM1540DM
Capacity									
Oven cavity (cu. ft.)	1.6	1.8	1.8	1.7	1.7	1.7	1.7	1.5	1.5
Features									
Watts (IEC-705 test procedure)	1000	1100	1100	1000	1000	1000	1000	950	950
Electronic touch controls	●	●	●	●	●	●	●	●	●
SmartControl system w/ interactive display	●	●	●	●	●	●	●	●	●
Scrolling display	2-line	2-line	2-line	1-line	1-line	1-line	1-line	1-line	1-line
Clock and AM/PM pad	●	●	●	●	●	●	●	●	●
Variable scroll speed	●	●	●	●	●	●	●	●	●
Help pad	●	●	●	●	●	●	●	●	●
Bilingual display (English/Spanish)		●	●						
Sensor controls									
Beverage	●	●	●	●					
Popcorn	●	●	●	●					
Potatoes	●	●	●	●					
Reheat		●	●	●					
Vegetables		●	●	●					
Cook	●								
Convenience controls									
Beverage					●	●	●	●	●
Potato					●	●	●	●	●
Popcorn					●	●	●	●	●
Reheat					●	●	●	●	●
Snacks									
Vegetables					●				
Cook					●				
Cooking Controls									
Manual Grill	●								
Combination Grill	●								
Auto Grill-Beef or Pork	●								
Auto Grill-Seafood	●								
Auto Grill-Poultry	●								
Express Cook (1-6 min.)		●	●	●	●	●	●	●	●
Instant On controls	●	●	●	●	●	●	●	●	●
Time cook	I & II	I & II	I & II	I & II	I & II	I & II	I & II	I & II	I & II
Add 30 Seconds	●	●	●	●	●	●	●	●	●
Auto/Time Defrost	●/●	●/●	●/●	●/●	●/●	●/●	●/●	●/●	●/●
1 lb. Quick Defrost	●	●	●	●	●	●	●	●	●
Power levels	10	10	10	10	10	10	10	10	10
Delay Start/Reminder		●/●	●/●	●/●	●/●	●/●	●/●	●/●	●/●
Cooking system	Top feed	CircuWave™ 1100	CircuWave 1100	CircuWave	CircuWave	CircuWave	CircuWave	Top feed	Top feed
Turntable	●	Recessed	Recessed	●	●	●	●	●	●
Turntable On/Off	●	●	●	●	●	●	●	●	●
Interior lighting	●	●	●	●	●	●	●	●	●
Full-view cooktop lighting	●	●	●	●	●	●	●	●	●
Night light		●	●	●	●	●	●	●	●
Programmable night light	●	●	●	●	●	●	●	●	●
Timer On/Off	●	●	●	●	●	●	●	●	●
Cooking complete reminder	●	●	●	●	●	●	●	●	●
Control lockout	●	●	●	●	●	●	●	●	●
300-CFM exhaust fan	2-speed	4-speed with boost	4-speed with boost	2-speed	2-speed	2-speed	2-speed	2-speed	2-speed
Appearance									
Color appearance**	SS WW/BB	SS WW/CC/BB	SS WW/CC/BB	SS WW/CC/BB	SS WW/CC/BB	WW/CC/BB	WW/CC/BB	SS WW/CC/BB	SS CS WW/CC/BB
Case color	Black White/Black	Black White/Bisque/ Black	Black White/Bisque/ Black	Black White/Bisque/ Black	Black White/Bisque/ Black	White/Bisque/ Black	White/Bisque/ Black	Black White/Bisque/ Black	Black Black White/Bisque/ Black
Weights & Dimensions									
Overall oven interior dimensions WxHxD (in inches)	20 x 9 x 14-13/32	21-29/32 x 9-1/2 x 14-19/32	21-29/32 x 9-1/2 x 14-19/32	20-1/4 x 9-1/4 x 14-13/32	20-31/32 x 9-3/8 x 14-3/16	20-31/32 x 9-3/8 x 14-3/16	20-31/32 x 9-3/8 x 14-3/16	18-13/16 x 9-1/4 x 14-13/32	18-13/16 x 9-1/4 x 14-13/32
Approx. shipping weight (lbs.)	70	68	68	67	67	67	67	67	67
Power/Ratings									
Input Volt/Hertz	120V/60Hz	120V/60Hz	120V/60Hz	120V/60Hz	120V/60Hz	120V/60Hz	120V/60Hz	120V/60Hz	120V/60Hz
Input Amps/Watts (max)	15A/1.58KW	15A/1.58KW	15A/1.58KW	15A/1.58KW	15A/1.6KW	15A/1.6KW	15A/1.6KW	15A/1.58KW	15A/1.58KW
Accessories									
Cooking guide label	●	●	●	●	●	●	●	●	●
Oven racks	1 (2-positions)	1 (2-positions)	1 (2-positions)	1 (2-positions)	1			1	1
Recirculating charcoal filter kit†	Optional	Included	Optional	Optional	Optional	Included	Optional	Included	Optional
Filler panel kit (optional for 36" installation)	JX52BL/WH	JX52BL/WH	JX52BL/WH	JX48BL/WH	JX48BL/WH	JX48BL/WH	JX48BL/WH	JX41/JX40	JX41/JX40
Warranty									
Limited one-year in-home warranty††	●	●	●	●	●	●	●	●	●

*Non-vented model.

**SS = Stainless steel, CS = CleanSteel™, WW = White on white, CC = Bisque on bisque, BB = Black on black.


†Optional for units that are not set as recirculating from the factory. See page 278 for replacement charcoal filter kit.

††See warranty for details.

Overall exterior dimensions (in inches)

Model	W	D	H	H (Rear)
JVM1665	29-7/8	15-3/8	16	16-13/32
JVM1850/JNM1851	29-7/8	15-1/4	16	16-13/32
JVM1750	29-7/8	15-1/4	16	16-13/32
JVM1740	29-7/8	15-5/32	15-5/8	16-13/32
JVM1730/JNM1731	29-7/8	15-5/32	15-5/8	16-3/16
JVM1540/JNM1541	29-7/8	15-1/4	16	16-13/32

This information is not intended to be used for installing unit described. Before installing, consult installation instructions packed with product/kit for current dimensional data.

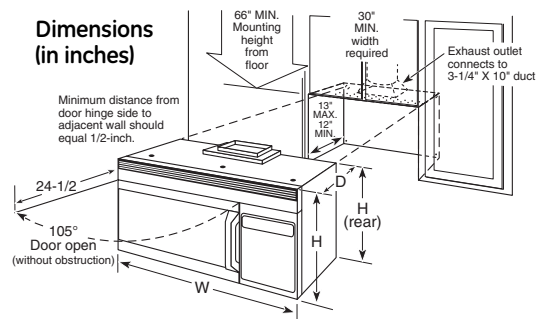

Spacemaker II™ microwave ovens

		GE Profile™	GE
		PEM31SM PEM31DM	JEM25DM
Capacity			
Oven cavity (cu. ft.)		1.0	1.0
Features			
Watts (IEC-705 test procedure)		800	800
Electronic touch controls		●	●
Scrolling display with help		●	
Demo mode		●	
Electronic digital display w/clock		●	●
Sensor controls	Popcorn	●	
	Beverage	●	
	Reheat	●	
	Vegetable	●	
	Potato	●	
	Chicken/Fish	●	
Convenience controls	Popcorn		●
	Beverage		●
	Reheat		●
	Snacks		●
	Cook		●
Express Cook		●	●
Instant On controls		●	●
Time cook I & II		●	●
Add 30 Seconds		●	●
Auto/Time Defrost		●	●
Power levels		10	10
Turntable on/off		●	●
Kitchen timer/Timer (on/off)		— / ●	● / —
Cooking complete reminder		●	●
Delay Start		●	●
Reminder		●	●
Control lockout		●	●
Appearance			
Color appearance		SS WW, CC, BB	WW, BB
Case color		Black White, Bisque, Black	White, Black
Door color		Stainless steel White, Bisque, Black	White, Black
Weights & Dimensions			
Approx. shipping weight (lbs.)		40	40
WxHxD† (in inches)	Cavity	16-1/2 x 7-7/16 x 11-1/4	
	Exterior	23-25/32 x 11-3/16 x 12-9/32	
Power/Ratings			
Input Volt/Hz		120V/60Hz	120V/60Hz
Electrical input @ 120V	Watts	1300	1300
	Amperage	11.5	11.5
Accessories			
Cooking guide label		●	●
Optional hanging kit		JXA019K*	JXA019K*
Optional built-in kit		JX827SMSS JX827DMWW/ JX827DMBB	JX827DMWW/ JX827DMBB
Right-angle plug		●	●
Warranty			
Limited one-year in-home warranty**		●	●
Limited five-year magnetron warranty**		●	

*JXA019K is available at additional cost.

**See written warranty for details.

†Exterior dimensions: height includes feet, depth does not include handle.

		GE Profile™			GE®						
		Convection	Extra-large		Extra-large	Family-size					
		PEB1590SM PEB1590DM	PEB2060SM PEB2060DM	JES2251SJ	JEB1860SM JEB1860DM	JES1290SK	JES1288SH	JES1384SF	JES1344SK	JEB1460WF JEB1460BF	
ADA compliant		●	●		●						
Capacity											
Oven cavity (cu. ft.)		1.5	2.0	2.2	1.8	1.2	1.2	1.3	1.3	1.4	
Features											
Watts (IEC-705 test procedure)		1000	1200	1200	1100	1000	1000	1000	1000	1150	
Inverter technology				●							
Cooking element						Top-1200W; Bottom-400W	Top-1200W; Bottom-400W	Top-1100W			
Electronic touch controls		Tactile switches/ dial	●	●	●	●	Tactile switches/ dial	Tactile switches/ dial	Tactile switches/ dial	●	
Scrolling display with Help Pad		2-line	●	●	●	●	●			●	
Demo mode			●		●					●	
Electronic digital display w/clock		●	●		●	●	●	●	●	●	
Display On/Off		●	●		●	●		●	●	●	
Convection controls	Convection	●				●					
	Combination (Conv/MWO)	●				●					
Grill controls	Grill					●	●				
	Brown					●	●	●			
Sensor controls	Popcorn	●	●		●					●	
	Beverage	●	●		●					●	
	Lunch/Snack			●							
	Reheat	●	●	●	●					●	
	Vegetable		●		●					●	
	Cook	●									
	Potato		●		●					●	
	Chicken/Fish		●		●					●	
	Breakfast			●							
	Rice										
	Soup										
	Dinner Plate/ Frozen dinner			●/-							
Convenience controls	Popcorn			●		●	●	●	●		
	Beverage					●	●	●	●		
	Reheat					●	●				
	Vegetable										
	Potato										
	Cook							●	●		
	Dinner plate Pizza										
Express Cook	1-6 min.	1-6 min.		1-6 min.	1-6 min.	1-6 min.	30 sec.	30 sec.	1-6 min.		
Warming control				●							
Instant On controls		●	●		●	●	●	●	●	●	
Time cook		I & II	I & II	I & II	I & II	I & II	●	●	●	I & II	
Add 1 Minute				●							
Add 30 Seconds			●		●	●	●	●	●	●	
Auto/Time Defrost		●	●	●	●	●	●	●	●	●	
Power levels		10	10	10	10	10	10	10	10	10	
Turntable		Recessed	●	●	On/Off	●	●	●	●	Recessed	
Kitchen timer/Timer on/off		- / ●	- / ●	- / ●	- / ●	- / ●	● / -	● / -	● / -	- / ●	
Delay Start/Reminder			●	● / -	●					●	
Cooking complete reminder		●	●		●	●	●			●	
Control lockout		●	●	●	●	●	●	●	●	●	
Appearance											
Color appearance*		SS WW/CC/BB	SS WW/CC/BB	SS	SS WW/CC/BB	SS	SS	SS	SS	WW/BB	
Case color		Black White, Bisque, Black	Black White, Bisque, Black	Stainless steel	Black White, Bisque, Black	Stainless steel	Stainless steel	Stainless steel	Stainless steel	White Black	
Door color		SS* White, Bisque, Black	SS* White, Bisque, Black	Stainless steel	SS* White, Bisque, Black	Stainless steel	Stainless steel	Stainless steel	Stainless steel	White Black	
Weights & Dimensions											
Approx. shipping weight (lbs.)		67	48	41	48	54	46	40	40	45	
WxHxD (in inches)		15-1/4 x 10-7/8 x 15-1/4	16-11/16 x 11-1/4 x 18-1/16	18-1/2 x 11 x 18-1/2	16-2/3 x 9-3/4 x 16-3/4	14-1/2 x 9-5/8 x 15-5/8	14-1/2 x 9-5/8 x 15-5/8	15 x 9-11/16 x 15-1/4	15 x 9-11/16 x 15-1/4	14-13/16 x 9-7/8 x 16	
Cavity											
Exterior**		22-5/8 x 14-7/8 x 19-7/8	24 x 13-25/32 x 19-13/32	24 x 13-3/4 x 19-7/16	23-7/8 x 13-9/16 x 18-13/16	22 x 13-1/2 x 20-1/4	22 x 13-1/2 x 18-1/2	22-3/16 x 12-1/2 x 17-3/8	22-3/16 x 12-1/2 x 17-1/4	21-7/8 x 12-5/8 x 17-1/4	
Power/Ratings											
Input Volt/Hz		120/60	120/60	120/60	120/60	120/60	120/60	120/60	120/60	120/60	
Electric input @ 120V	Watts	1500	1650	1650	1550	1500	1800	1530	1530	1600	
	Amperage	13	13.9	13.9	13.6	13	15	13.3	13.3	13.5	
Accessories											
Cooking guide label		●	●	●	●	●	●	●	●	●	
Cookbook		●				Guide	Guide				
Oven rack		●				●	●	●			
Optional hanging kit											
Right-angle plug		●	●		●						
Warranty											
Limited one-year in-home warranty***		●	●	●	●	●	●	●	●	●	
Limited five-year magnetron warranty***		●	●	●							

*SS = Stainless steel, WW = White on white, CC = Bisque on bisque, BB = Black on black

**Exterior dimensions: height includes feet, depth does not include handle.

***See written warranty for details.


†Part No. JXA019K is available at additional cost.

Mid-size							
JES1334WD JES1334BH	JE1160WD JE1160BD	JES1142SJ	JES1139WL JES1139BL	JE740WK JE740BK	JES0736SMSS	JES735WJ JES735BJ	
1.3	1.1	1.1	1.1	0.7	0.7	0.7	
1100	1100	1100	1100	700	700	700	
•	• Help Only	•	•	•	•	•	
•	• •	•	•	•	•	•	
	•						
	• Fresh/Frozen						
•	• - / •						
	• •						
	•						
•		•	•	•	•	•	
•		•	•	•	•	•	
•		•	•	•	•	•	
		•	•	•	•	•	
		•	•	•	•	•	
1-6 min.	30 sec.	•	1-6 min.				
•	•	•	•	•	•	•	
I & II	I & II	•	I & II	I & II	I & II	I & II	
•	•		•	•	•	•	
•	•	•	•	• / -	• / -	• / -	
10	10	10	10	10	10	10	
•	•	•	•	•	•	•	
• / -	• / -	• / -	• / -	• / -	• / -	• / -	
• / -	• / -	- / •	• / -	•	•	•	
•	•	•	•	•	•	•	
•	•	•	•	•	•	•	
WW/BB	WW/BB	SS	WW/BB	WW/BB	SS	WW/BB	
White/Black	White Black	Stainless steel	White Black	White Black	Black	White Black	
White/Black	White Black	Stainless steel	White Black	White Black	Stainless steel	White Black	
42	37	39	33	27	25.3	26	
14-1/2 x 9-1/5 x 15-1/4	13-11/16 x 8-1/2 x 14-15/16	14 x 9 x 14-11/16	13-7/32 x 9-1/8 x 13-23/32	12-3/16 x 7-13/16 x 11-9/16	12-3/8 x 7-15/16 x 11-9/16	12-3/8 x 7-15/16 x 11-9/16	
22 x 12 x 17	21-1/4 x 11-7/8 x 15-7/8	21-1/4 x 11-7/8 x 15-3/4	20-3/8 x 11-3/8 x 15-1/8	17-15/16 x 11-1/16 x 12-5/16	17-7/8 x 10-3/16 x 12	17-7/8 x 10-3/16 x 13	
120/60	120/60	120/60	120/60	120/60	120/60	120/60	
1530	1500	1500	1780	1050	1050	1050	
13.3	13	13	15.7	9.3	9.3	9.3	
•	•	•	•	•	•	•	
				JXA019K†			
				•			
•	•	•	•	•	•	•	

Undercabinet mounting kit (Part No. JXA019K) for Spacemaker II and microwave oven Models PEM31, JEM25 and JE740

(Sold separately)

Not to be used over a thermal oven.



Undercabinet Installation

Install Spacemaker II microwave ovens in just a few easy steps with the mounting template, which provides all the necessary measurements. These microwave ovens can be installed on practically any wood or metal cabinets. Installation may vary depending on cabinets.

Note: 120V, 60-cycle, grounded power receptacle location optional on back within cabinet opening.

Microwave oven trim kits

30" deluxe trim kit for 2.0 or 1.8 cu. ft. microwave ovens

This trim kit allows for built-in installation of the 2.0 or 1.8 microwave oven in a wall or cabinet alone, or over a GE Profile™ 30" single electric wall oven. Do not install microwave lower than 36" above the floor.

30" deluxe trim kits for models PEB2060 or JEB1860

JX2030SMSS—Stainless Steel
JX2030DMWW—White
JX2030DMCC—Bisque
JX2030DMBB—Black

Model	"Z"	30" deluxe trim kit
PEB2060SMSS/ JEB1860SMSS	29-3/4"	JX2030SMSS
PEB2060DMWW/ JEB1860DMWW	29-3/4"	JX2030DMWW
PEB2060DMCC/ JEB1860DMCC	29-3/4"	JX2030DMCC
PEB2060DMBB/ JEB1860DMBB	29-3/4"	JX2030DMBB

27" deluxe trim kit for 2.0 or 1.8 cu. ft. microwave ovens

The 27" deluxe trim kit allows a 2.0 or 1.8 microwave oven to be built into a wall or cabinet alone, or over a GE 27" single electric wall oven for a complete one-piece, built-in, integrated appearance. Do not install microwave lower than 36" above the floor.

27" deluxe trim kits for models PEB2060 or JEB1860

JX2027SMSS—Stainless Steel
JX2027DMWW—White
JX2027DMCC—Bisque
JX2027DMBB—Black

Model	"Z"	27" deluxe trim kit
PEB2060SMSS/ JEB1860SMSS	26-15/16"	JX2027SMSS
PEB2060DMWW/ JEB1860DMWW	26-15/16"	JX2027DMWW
PEB2060DMCC/ JEB1860DMCC	26-15/16"	JX2027DMCC
PEB2060DMBB/ JEB1860DMBB	26-15/16"	JX2027DMBB

Deluxe trim kits for 1.5 cu. ft. GE Profile microwave ovens

Built-in trim kits allow installation in a wall, cabinet alone, or over a GE Profile™ 30" or 27" single electric wall oven. Use a convection wall oven under these convection microwave ovens for a complete cooking center. Do not install microwave lower than 36" above the floor.

30" deluxe trim kits for model PEB1590

JX1530SMSS—Stainless
JX1530DMWW—White
JX1530DMBB—Black

Model	"Z"	30" deluxe trim kit
PEB1590SMSS	29-3/4"	JX1530SMSS
PEB1590DMWW	29-3/4"	JX1530DMWW
PEB1590DMBB	29-3/4"	JX1530DMBB

27" deluxe trim kits for model PEB1590

JX1527SMSS—Stainless
JX1527DMWW—White
JX1527DMBB—Black

Model	"Z"	27" deluxe trim kit
PEB1590SMSS	26-7/8"	JX1527SMSS
PEB1590DMWW	26-7/8"	JX1527DMWW
PEB1590DMBB	26-7/8"	JX1527DMBB

Built-in trim kit for 1.0 cu. ft. microwave ovens

Built-in trim kits allow installation in a wall, cabinet alone, or over a 27" GE electric wall oven. This kit should not be installed over a gas wall oven. Do not install microwave lower than 36" above the floor.


27" deluxe trim kits for model PEM31 and JEM25

JX827SMSS—Stainless
JX827DMWW—White
JX827DMBB—Black


Model	Model	"Z"	27" deluxe trim kit
PEM31SMSS	—	26-1/4"	JX827SMSS
PEM31DMWW	JEM25DMWW	26-1/4"	JX827DMWW
PEM31DMBB	JEM25DMBB	26-1/4"	JX827DMBB

This information is not intended to be used for installing unit described. Before installing, consult installation instructions packed with product/kit for current dimensional data.


Cutout dimensions (in inches)

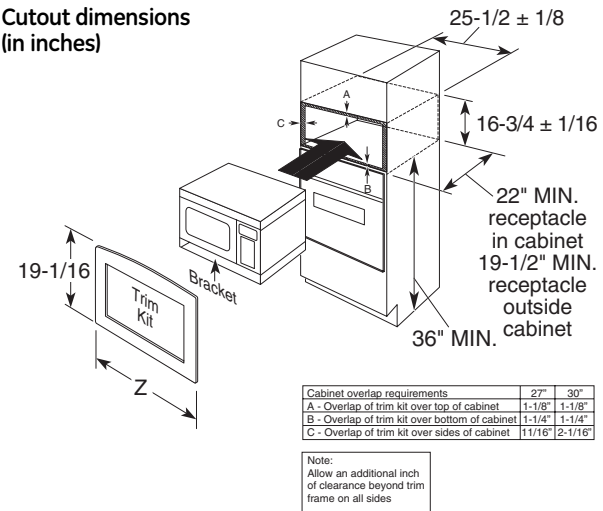

Cutout dimensions (in inches)

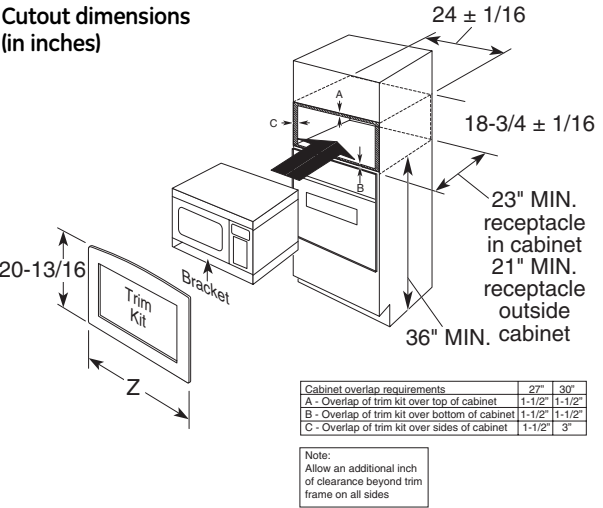

Cutout dimensions (in inches)

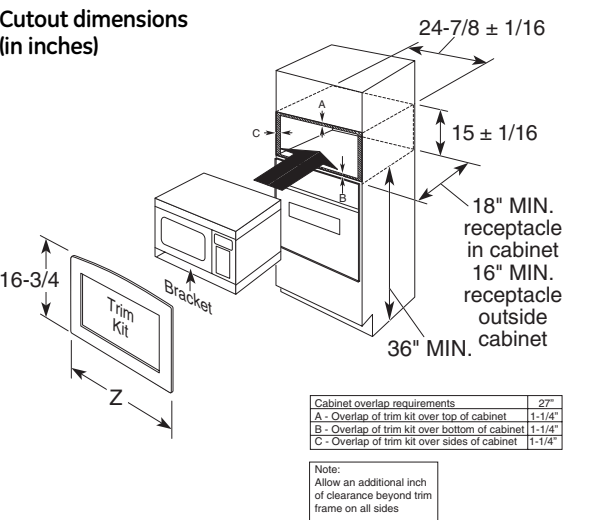

Reading nomenclatures

Side-by-side refrigerator nomenclature

P	S	H	S	6	Y	G	X	S	S
Brand P=GE Profile C=GE Café™ G=GE	Exterior B=stainless door/black case C=color with textured doors F=color high-gloss doors L=CleanSteel™ M=metallic S=stainless steel W=full stainless wrap P=partial stainless wrap, sides only		Capacity		Model year		Color CC=bisque BB=black SS=stainless WW=white LB=CleanSteel with black handles LS=CleanSteel with stainless handles BG=graphite metallic CV=bisque dispenser panel-required BV=black dispenser panel-required SV=stainless dispenser panel-required WV=white dispenser panel-required		
Configuration S=side-by-side	Style S=standard-depth T=standard-depth with center bevel, ENERGY STAR® H=standard-depth, ENERGY STAR C=counter-depth D=counter-depth, ENERGY STAR E=counter-depth with center bevel F=counter-depth with center bevel, ENERGY STAR I=counter-depth, panel required J=counter-depth, panel required, ENERGY STAR L=counter-depth, ENERGY STAR, hidden hinges		Ice/Water B=icemaker ready E=cubed/crushed ice & water F=6-month filter/cubed & crushed ice G=1-year filter with indicator, cubed & crushed ice H=refreshment center		Feature pack				

Bottom-freezer refrigerator nomenclature (21 and 25 cu. ft. models)

P	F	S	S	6	K	K	L	R	S	S
Brand P=GE Profile C=GE Café™ G=GE	Style C=counter-depth I=counter-depth panel-required S=standard depth		Capacity Feature pack		Model year		Door swing L=left door swing R=right door swing			
Configuration B=bottom-freezer with freezer door D=bottom-freezer with freezer drawer F=French-door with freezer drawer G=French-door with armoire styling		Exterior C=color with textured doors F=high-gloss L=CleanSteel™ S=stainless steel W=full stainless wrap P=partial stainless wrap, sides only 1=capacity		Ice & Water B=icemaker ready C=icemaker E=6-month filter/icemaker F=1-year filter/icemaker I=internal water dispenser/filter/icemaker J=External water dispenser/1-year filter/icemaker K=external cubed & crushed ice/water/icemaker M=external cubed & crushed ice/water/icemaker & refreshment center				Color CC=bisque BB=black SS=stainless WW=white LS=CleanSteel™/stainless BG=graphite metallic WV=white visor panel-required BV=black visor panel-required		

Top-freezer refrigerator nomenclature

P	T	S	2	5	L	H	S	R	W	W
Brand P=Profile™ G=GE® H=Hotpoint™	Capacity cubic feet		Model year		Color SS=stainless steel WW=white CC=bisque on bisque BB=black BS=CleanSteel/black handles SA=stainless appearance		Door swing R=right door swing L=left door swing			
Configuration T=top-freezer W=wine center	Style S=standard depth/handle L=CleanSteel™ R=recessed handle H=ENERGY STAR®		Ice maker A=not icemaker ready B=icemaker ready C=factory-installed icemaker F=6-month filter/icemaker H=internal water dispenser/6-month filter/icemaker S=Stainless 6-month filter/icemaker		Feature pack					

Freezer nomenclature

F	U	M	2	1	D	T	R	W	H
GE freezer	Defrost M>manual F=frost-free		Model year		Door swing R=right L=left		Color WH=white* WW=white		
Configuration U=upright C=chest	AHAM rated capacity to the nearest 10th of a cubic foot		Series D=deluxe S=standard C=Convertible						

Advantium® nomenclature (prior to 2008)

S	C	B	1	0	0	1	M	S	S
GE Speedcook technology	Configuration A=above-the-cooktop B=wall oven		Feature pack Designates features—the higher the number, the more features.		Model year		Product color SS=stainless WW=white CC=bisque BB=black		

Advantium nomenclature (2008 and later)

P	S	B	2	2	0	1	N	S	S
Brand P=Profile	Configuration A=above-the-cooktop B=built-in wall oven		Feature pack Designates features—the higher the number, the more features.			Model year designator	Product color SS=stainless WW=white CC=bisque BB=black		
GE Speedcook technology			Voltage 1=120 volt 2=240 volt			Model/Door color 0=color-matched 1=stainless			

Cooking products nomenclature

P	G	B	P	8	5	D	E	M	1	B	B
G=gas H=induction Z=dual-fuel		Feature pack Designates features—the higher the number, the more features.		Oven type S=standard P=self-clean B=telescopic downdraft D=warming drawer 9=Profile 0-8=extended feature pack on select self-clean models		Model year designator		Indicator for engineering and product service only			
Brand P=GE Profile* C=GE Café J=GE		Configuration B=30" free-standing C=40" free-standing D=30" drop-in K=wall oven—27" cabinet M=27" drop-in N=hood (non-vented) P=cooktop S=slide-in R=wall oven—24" cabinet T=wall oven—30" cabinet V=hood (vented) X=accessory		Model/Door color C=bisque glass T=true white glass K=true bisque glass S=stainless B=black glass (or simply glass door) W=white glass D=color-matched		Product color SS=stainless steel WW=white on white or true white CC=bisque on bisque or true bisque BB=black on black BC=brushed chrome/brushed aluminum/soft stainless SB=stainless color WH=white CT=bisque BL=black					
						Ignition system (gas models) E=electronic pilotless ignition P=standing pilot					

*Only applies to select models.

*Only applies to select models.

Microwave oven nomenclature

J	N	M	1	5	4	1	D	M	W	W
Brand P=Profile C=GE Café J=GE R=Hotpoint	Installation B=built-in capability M=mounts under cabinet/ built-in capability L=mountable under the cabinet S=countertop only		Capacity XX=cubic feet 36=36-inch design		Feature pack Designates features —high number denotes more features (1 denotes filter included) (S denotes CSA certified)		Model year		Color WW=white on white BB=black on black CC=bisque on bisque SS=stainless steel CS=CleanSteel SA=silver metallic	
Type E=countertop V=externally vented over-the-range N=non-vented over-the-range W=microwave wall oven				Model/Door color D=color-matched S=stainless steel L=CleanSteel M=silver metallic						

Dishwasher nomenclature—GE Profile™/GE Café™

P	D	W	T	5	0	0	P	B	B
Product type PDW=Profile CDW=GE Café GCG=15" Profile compactor	Control and Tub T=integrated controls F=front controls Exceptions: 1=compactor 7=Profile plastic tub 9=GE Café 8=stainless steel door		Feature pack 2X0/2X0=Non-SmartDispense™ 4X0/5X0=SmartDispense™ Exceptions: compactors		Model year		Exterior color SS=stainless steel WW=white on white CC=bisque on bisque BB=black on black II=requires custom panel and handle		

*Models prior to 2006

GE makes builders' lives easier.

GE gives you all the tools you need to manage and grow your business.



- An industry-leading company committed to customer satisfaction.
- America's #1 preferred appliance brand.*
- A nationwide network of sales professionals and service technicians wholly dedicated to the builder community. **800.GE.CARES.**

*GE is the appliance brand most often mentioned among the brands rated as offering the best products and services in America. Source: Harris Poll 2006.

- 24-hour accessibility through award-winning technology
—**GECustomerNet.com**
—**GESelectionCenter.com**
—**ge.com**
- GE Answer Center® saves you time by providing answers on product features. **800.626.2000.**



- Project planning made simple with **Quick Specs**
- Product features and dimensions are faxed to you **FREE**, wherever and whenever you need them. **800.432.3729.**

- Available on CD by calling **1.800.848.7722** or on **2020.net** for subscribers only

This catalog was printed on paper that was manufactured with 100% certified renewable energy and contains at least 10% post-consumer material.



GE Consumer & Industrial
Appliances
General Electric Company
Louisville, KY 40225
ge.com

As an ENERGY STAR® partner, GE has determined that the appliances marked with the ENERGY STAR logo meet the ENERGY STAR guidelines for energy efficiency.

Before purchasing an ENERGY STAR qualified appliance, read important information about its estimated annual energy consumption or energy efficiency rating that is available from your retailer, ge.com or www.energystar.gov.

GE has a policy of continuous improvement of its products and reserves the right to change materials and specifications without notice.

© 2008 GE Company
Pub. No. 24-C988 PC53781