


**Melotte  
Morse  
Leonatti  
Parker**



213 1/2 South Sixth Street  
Springfield, Illinois, 62701  
Voice (217) 789-9515  
Fax (217) 789-9518  
www.mmlpltd.com  
architect@mmlpltd.com  
Firm Registration #184-000252

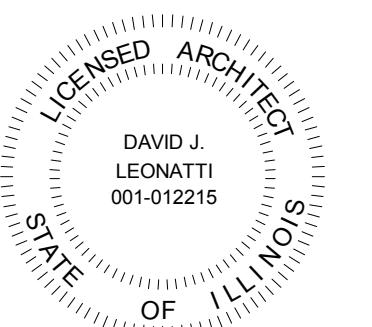

Expires NOVEMBER 2012  
**NOT FOR CONSTRUCTION**  
Signature & Date

Preliminary



**Roof Plan -  
Roof Scope**



**Will Rogers  
Theater  
Charleston**



Kate Dumke Troccoli  
Washington Square  
Realtors  
815-434-3630




May 22, 2012



**A2.0**

MMLP # 111117

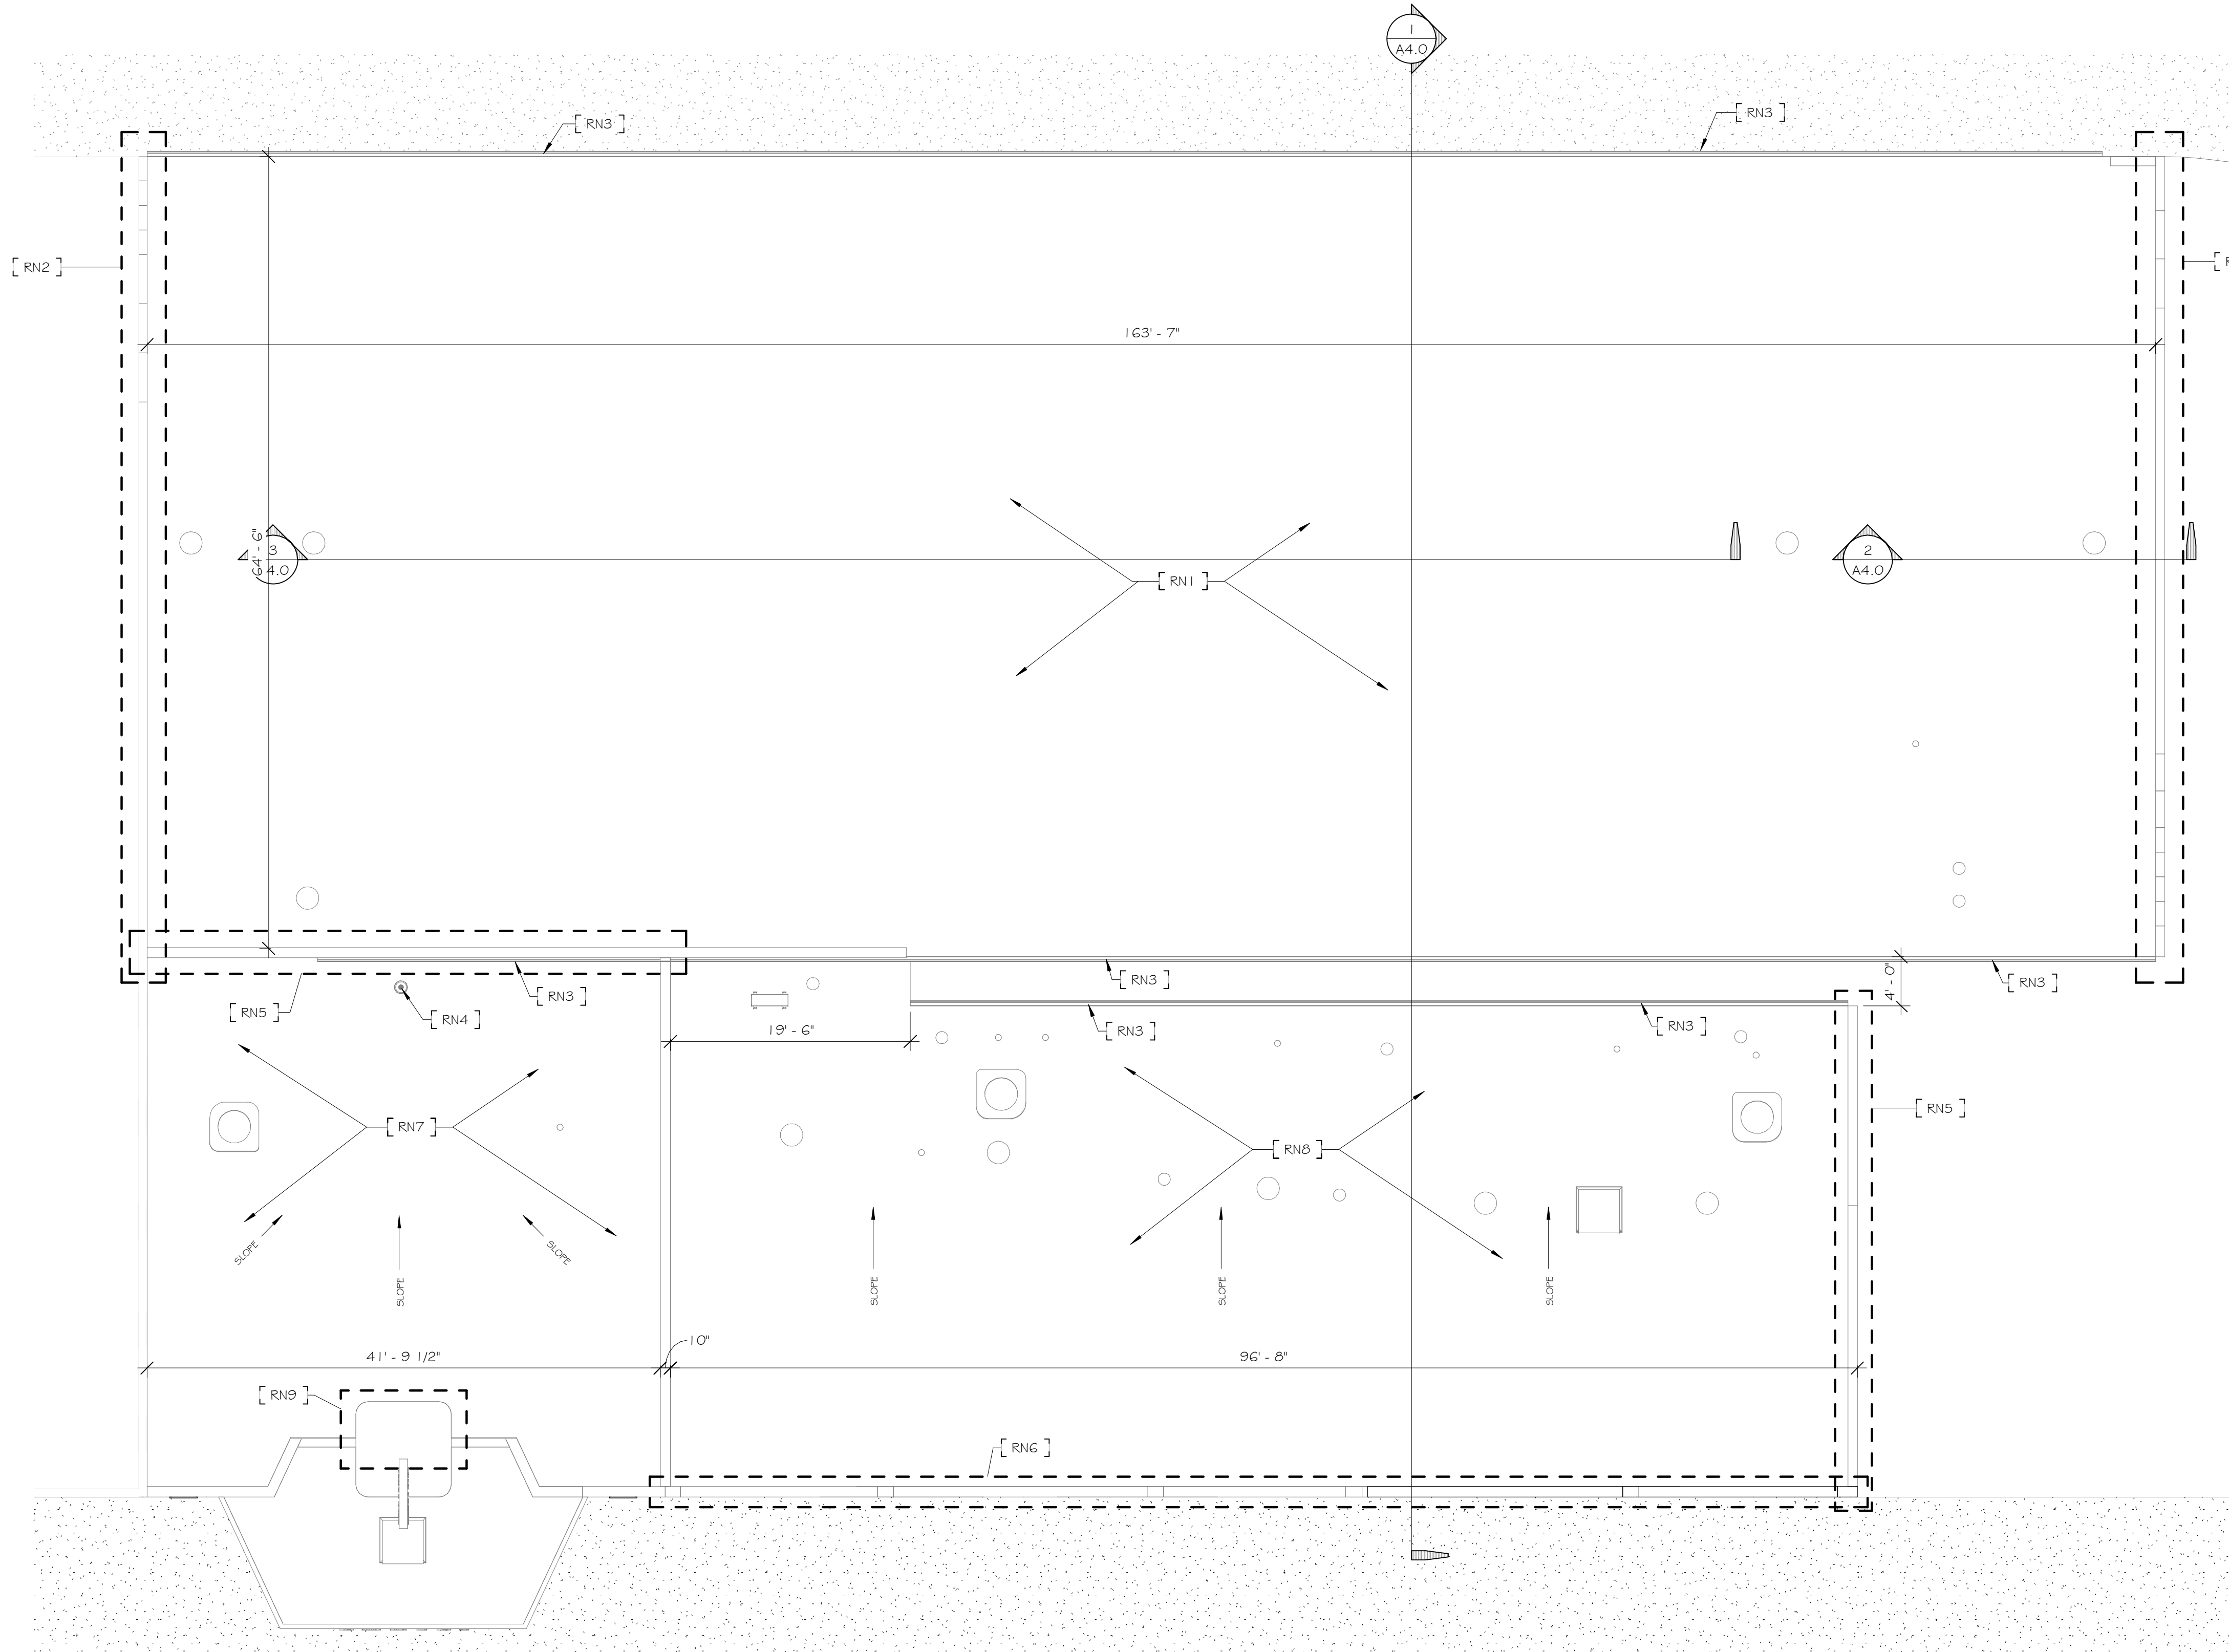

ROOF REPAIR KEYNOTES	
RN1	0.60 MIL EPDM ROOF W/ RECOVERY BOARD
RN2	PARAPETS / MASONRY BUILDING WALLS - NEW STEP FLASHING AND NEW TERMINATION BAR AND COUNTERFLASHING. AT END OF PARAPET CAP - REMOVE CLAY TILE CAPS AND FLASH / REINSTALL CLAY CAPS
RN3	REMOVE EXISTING GUTTER. PROVIDE NEW ROOF EDGE / 8" COMMERCIAL GUTTER
RN4	NEW DRAIN / NEW BODY / COVER AND FLANGE. A-SHAPE SUMP AT DRAIN
RN5	PARAPET AT ONE-STORY WING. PROVIDE NEW EPDM FLASHING; TERMINATION BAR AND COUNTERFLASHING
RN6	FRONT FACADE PARAPETS. PROVIDE NEW ROOF TERMINATION; FLASHING AND COUNTERFLASHING AT ROOF-SIDE OF PARAPET
RN7	EXISTING EPDM ROOF TO REMAIN - N.I.C.
RN8	EXISTING 90LB. ROLL ROOFING - REMOVE AND REPLACE WITH 0.60 MIL EPDM MEMBRANE ROOFING ON 1/2" RECOVERY BOARD
RN9	PROVIDE NEW BARE FLASHING AT TOWER - NEW TERMINATION BAR AND COUNTERFLASHING AT TILE EXTERIOR

1 Roof Plan - New Work  
1/8" = 1'-0"

